

SUPER-G
**SHAPE
 MAKES A
 DIFFERENCE**




ZANEEN
 architectural



 PROLICHT




SUPER-G can be engraved and even highlighted with colour if required, creating a real eye-catcher.



SUPER-G SLIM straight pieces can be fitted with RICO reflector technology (reflector integrated cut-off).

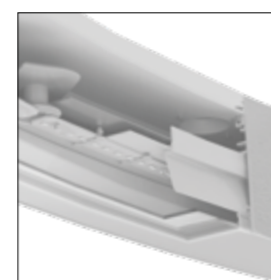

INTERNAL REFLECTOR

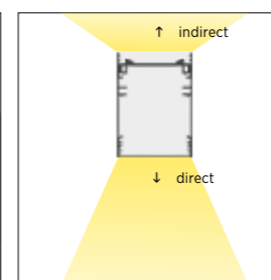

DIRECT/INDIRECT LIGHTING

SUPER-G BENEFITS

UNLIMITED CURVES

SUPER-G | SUPER-G SLIM

- freely selectable arrangements featuring a range of diameters and angles, straight connecting pieces and curved corners
- highly flexible concepts, any conceivable alignment possible

SUPER-G IDENTITY

ENGRAVING THE UNIQUE

- engraving of logos, characters or any font continuously over the entire length of the system (max. height of 50 mm)
- highlighting with color on request

EXTREMELY LOW UGR

REFLECTOR INTEGRATED CUT-OFF ON REQUEST

- SUPER-G SLIM: on request fitting with RICO reflector technology
- very low glare
- optimal visual comfort

INDIRECT LIGHTING

INTERNAL WHITE REFLECTOR

- LED boards on a recessed top plate, allowing indirect lighting
- a white internal reflector ensures high efficiency and even illumination

LET'S PLAY.

SUPER-G SLIM SYSTEM | GLORIOUS SLIM
 M ELEMENTS ESCHBORN, GERMANY | LIGHT PLANNING: LICHTKOMPETENZ
 PHOTO: LARS GRUBER

SUPER-G



Dynamic, buoyant, powerful – SUPER-G brings movement to light design. The lamps – available in a recessed, surface-mounted or suspended version, as well as in two track widths (65 mm and 150 mm) – are composed of individual parts that can be seamlessly and infinitely arranged together. Straight connecting pieces in various lengths, curves in different radii, corners and intersections can be combined in a limitless number of sequences. Due to its free alignment, SUPER-G can be optimally adjusted to any architectural dimensions or assembled to create individual shapes.




SUPER-G SLIM (RGB INDIRECT ILLUMINATION)

UNIVERSITY BASEL (LIBRARY), SWITZERLAND | ARCHITECT: HPAL HEINIGER + PARTNER
 LIGHT PLANNING: MAILICHT CATHERINE MAIER | PHOTO: O. KÜTTEL AG





SUPER-G
HOTEL NOVOTEL, LUXEMBOURG | ARCHITECT & LIGHT PLANNER: AEM LIGHTING LUXEMBOURG
PHOTO: DOMINIK BERG

UNLIMITED FREEDOM OF CURVES
SUPER-G | SUPER-G SLIM

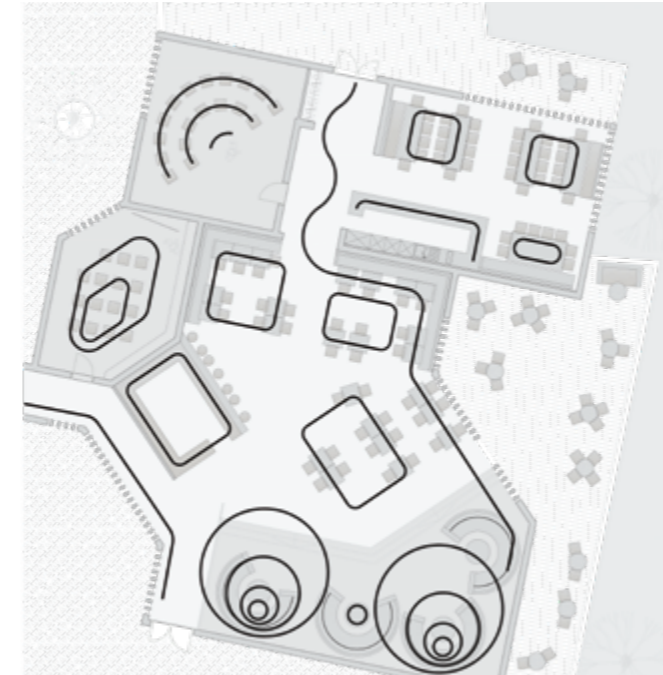

The luminaires are composed of in-dividual parts that can be seamlessly and infinitely arranged together. The freely selectable arrangements featuring a range of diameters and angles, straight connecting pieces and curved corners open up tremendous creative scope for unique, shadow-free lighting concepts.

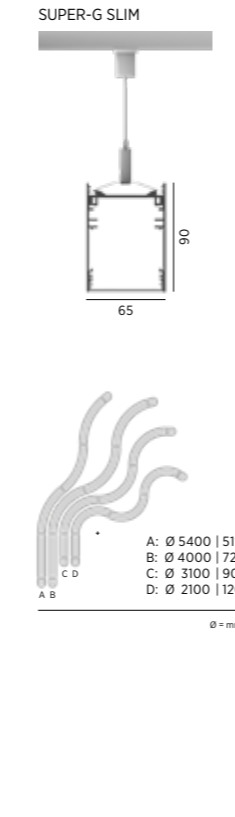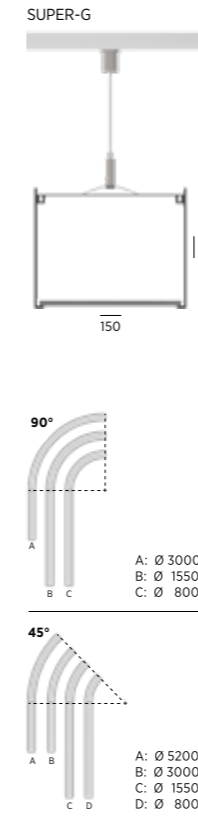

Besides straight lengths, any radius above 350 mm is possible with the SUPER-G.

SUPER-G SLIM is characterized by straight pieces and fixed 45° or 90° corners.



SUPER-G
MANDARIN ORIENTAL HOTEL, UNITED STATES OF AMERICA | INTERIOR ARCHITECT: TIHANY DESIGN
LIGHT PLANNING: FOCUS LIGHTING OF NYC | PHOTO: GEORGE APOSTOLIDIS | PARTNER: ZANEEN



SUPER-G
UNILEVER HEADQUARTER, INDONESIA
ARCHITECT & INTERIOR DESIGNER: AEDAS SINGAPORE | LIGHT PLANNING: INHABIT HONG KONG

SUPER-G DIMENSION MM	Recessed	SUPER-G STRAIGHT		SUPER-G CURVED		SUPER-G SLIM STRAIGHT		SUPER-G SLIM CURVED	
		3000 / 4000	3000 / 4000	3000 / 4000	3000 / 4000	81 x L (860 / 1140 / 1420 / 1720 / 2000)	81 x L (860 / 1140 / 1420 / 1720 / 2000)	81 x L (860 / 1140 / 1420 / 1720 / 2000)	81 x L (860 / 1140 / 1420 / 1720 / 2000)
Surface	-	-	-	Ø 2100 120° / Ø 3100 90°	Ø 4000 72° / Ø 5400 51°	-	-	Ø 3000 45° / Ø 3000 90° / Ø 5200 45°	Ø 3000 45° / Ø 800 90° / Ø 1550 45° / Ø 1550 90°
Suspended	90 x L (1150 / 1750)	90 x L (1150 / 1750)	90 x L (1150 / 1750)	Ø 2100 120° / Ø 3100 90°	Ø 4000 72° / Ø 5400 51°	81 x L (860 / 1140 / 1420 / 1720 / 2000)	81 x L (860 / 1140 / 1420 / 1720 / 2000)	Ø 3000 45° / Ø 3000 90° / Ø 5200 45°	Ø 800 45° / Ø 800 90° / Ø 1550 45° / Ø 1550 90°
LED CCT: Kelvin	3000 / 4000	3000 / 4000	3000 / 4000	3000 / 4000	3000 / 4000	3000 / 4000	3000 / 4000	3000 / 4000	3000 / 4000
Lumen/m	1695	1695	1695	2660	2660	2660	2660	2660	2660
Wattage/m	18.2	18.2	18.2	23.1	23.1	23.1	23.1	23.1	23.1
Tunable White	○	○	○	○	○	○	○	○	○
FINISH	25 PROLICHT Colours	●	●	●	●	●	●	●	●
SUPER-G Identity	○	○	○	○	○	○	○	○	○
Customised radius	○	○	○	○	○	○	○	○	○
Round end cap	○	○	○	○	○	○	○	○	○
Straight end cap	●	●	●	●	●	●	●	●	●
Cross 120°	●	●	●	●	●	●	●	●	●
Suspension cable 2-6 m	●	●	●	●	●	●	●	●	●
CONTROL	ON/OFF	●	●	●	●	●	●	●	●
1-10 V Dim	○	○	○	○	○	○	○	○	○
DALI Dim	●	●	●	●	●	●	●	●	●
PROTECTION	IP20	●	●	●	●	●	●	●	●
OPTICAL	Distribution dir.	●	●	●	●	●	●	●	●
Distribution dir./ind.	○1	○1	○1	○1	○1	○1	○1	○1	○1
Opal diffuser	●	●	●	●	●	●	●	●	●
Microprism	○	○	○	○	○	○	○	○	○
FEATURES	Rod suspension	○	○	○	○	○	○	○	○

○ Optionally available | Status: 01/2018