

# Flamingo

Exterior

Cangini & Tucci

Cini & Nils

Prolicht

Letroh

Panzeri

**Platek**

Ole

Side

UnoNoveSette

Ivela

Icone

Linea Zero

Milan

Quasar


Tunto

Knickboker

Studio Zaneen

Fambuena

# Platek



# FLAMINGO collection

design by  
Sara Moroni

**Platek®**

# downlight wall bollard floor





FLAMINGO bollard


DESIGN EXTERIOR LIGHTING

Flamingo is a family of products from minimal design in the emblem of the maximum flexibility. Sinuous but rigorous lines generate high performance of light distribution: wall, ceiling and floor lamps are available in the version

with long adjustable arms that reach and illuminate large portions of space. Flamingo thus creates scenographic effects that are always different both indoor and outdoor.

DESIGN EXTERIOR LIGHTING



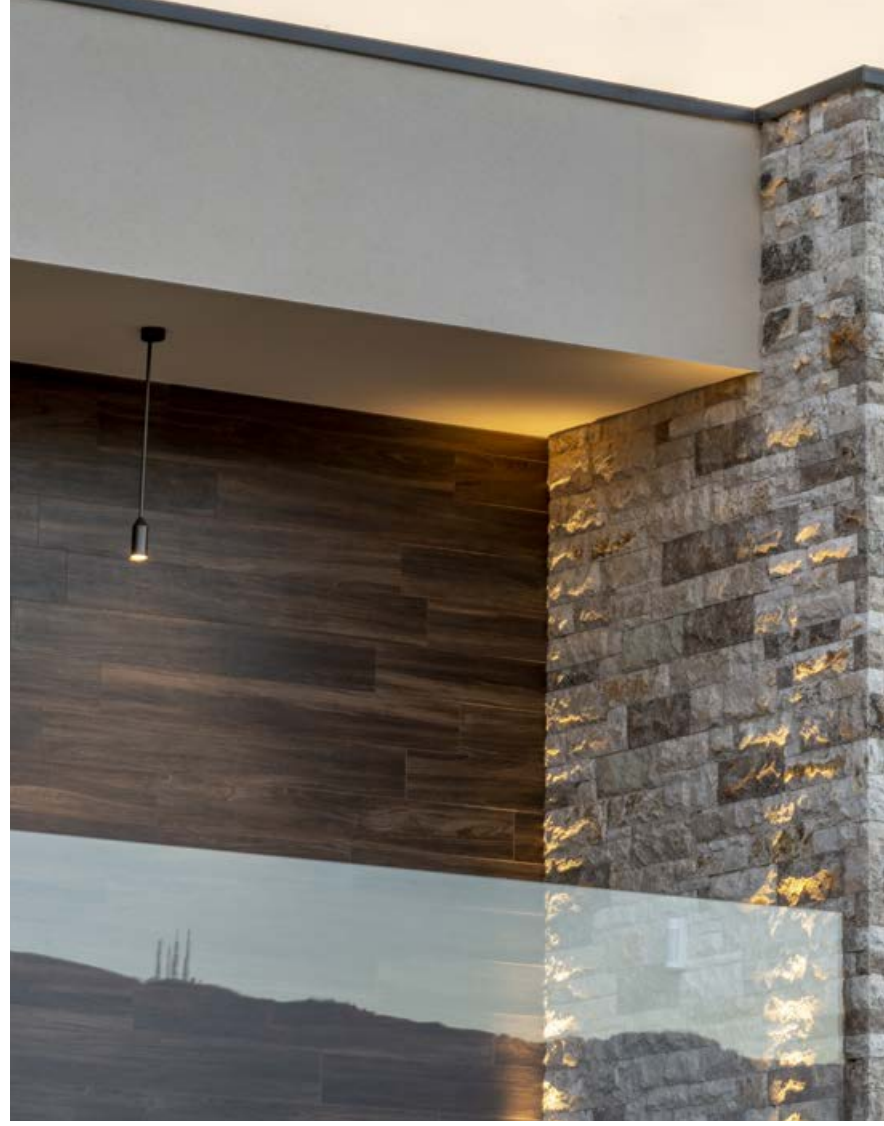



FLAMINGO downlight

DESIGN EXTERIOR LIGHTING

DESIGN EXTERIOR LIGHTING





DESIGN EXTERIOR LIGHTING

FLAMINGO downlight



DESIGN EXTERIOR LIGHTING



FLAMINGO wall



DESIGN EXTERIOR LIGHTING



FLAMINGO wall

DESIGN EXTERIOR LIGHTING







FLAMINGO applique

DESIGN EXTERIOR LIGHTING



DESIGN EXTERIOR LIGHTING



FLAMINGO applique




FLAMINGO applique





FLAMINGO bollard

DESIGN EXTERIOR LIGHTING

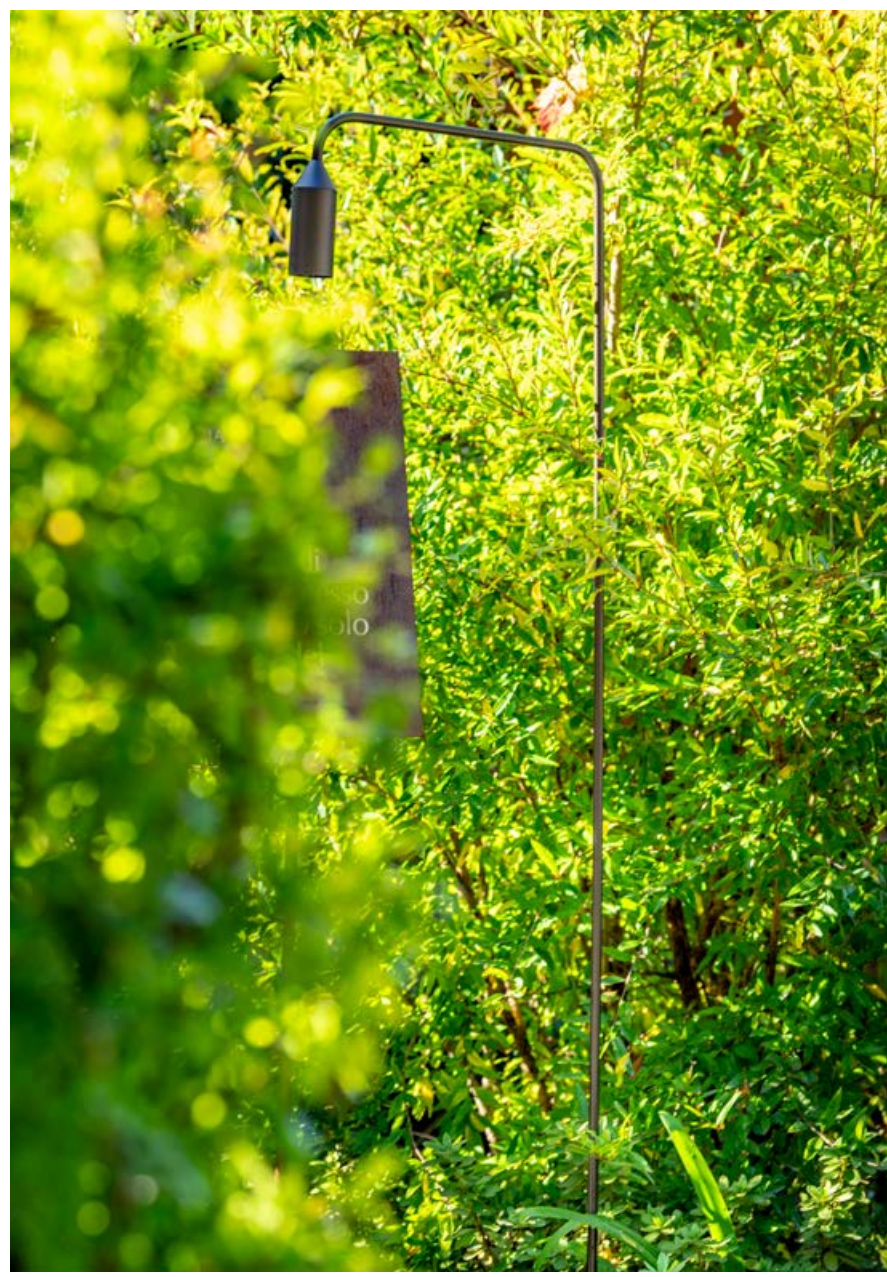

FLAMINGO bollard

DESIGN EXTERIOR LIGHTING



FLAMINGO floor

DESIGN EXTERIOR LIGHTING



DESIGN EXTERIOR LIGHTING



FLAMINGO floor



DESIGN EXTERIOR LIGHTING



FLAMINGO floor

DESIGN EXTERIOR LIGHTING

FLAMINGO floor



FLAMINGO floor





# FLAMINGO collection

# Lighting data


FLAMINGO downlight



IP65 . IK06

h. 170 mm | 6 11/16"  
h. 800 mm | 31 1/2"


FLAMINGO wall

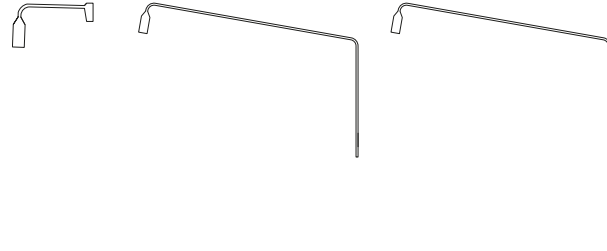

IP65 . IK06

h. 370 mm | 14 9/16"  
h. 1400 mm | 55 1/8"  
h. 1400 mm | 55 1/8" (extended)

FLAMINGO bollard




IP65 . IK06

h. 800 mm | 31 1/2"  
h. 1500 mm | 59 1/16"  
h. 1900 mm | 74 13/16"

IP68 connector included

FLAMINGO floor



IP65 . IK06

h. 1500 mm | 59 1/6"  
h. 1900 mm | 74 13/16"

IP44 SCHUKO included

## downlight / wall / bollard / floor

3000K CRI>80 120/277V  
RIAC dimmable ⊕

3000K / 4000K 2700K  
available on request



7.5W | 385 lm (\*) 2 mm  
methacrylate frosted diffuser

75° optic  
680 cd/klm

## standard finishes



.01 black



.09 bronze



This product catalog has been provided by Zaneen.  
Contact your local representative, [zteam@zaneen.com](mailto:zteam@zaneen.com) or 1-800.388.3382