2LOOK4 **MAGNET** MAKES A DIFFERENCE

PROLICHT


ZANEEN

architectural

2LOOK4 BENEFITS

48 V MAGTRACK ensures tool-free mounting of the different spots.













TOOL-FREE MOUNTING

48 V MAGTRACK - PROFILE 25 | 50

- all fittings magnetically installed
- tool-free mounting and repositioning
- PROFILE 25: hybrid solution with spots and general lighting

SPECIAL 230 V SLIM ADAPTER

PROFILE 20

- revolutionary mini 120 V track system with a 20 mm visible
- perfect solution for spaces where lines and light become a part of the architecture

3 SIZES OF SPOTLIGHTS

PROFILE 20 | 25 | 50

- three 2LOOK4 profiles are available with different spotlight

20: IMAGINE Ø60-75-90 mm 25: CENTRIQ Ø30-40-55 mm 50: CENTRIQ Ø60-75-95 mm

TILTABLE MODULES

120 V PLUG - PROFILE 50

- glare-free modules
- easy pivoting of the modules by 2x25°
- simply and easily movable within the channel








2LOOK4 20 | 25

A hybrid lighting solution with spots and general lighting, thats profiles 20 and 25. Available as profile 25 (48 V MAGTRACK) and as profile 20 (120 V TRACK variant).







2LOOK4 PR	OFILES	20	25		50		80	130	160
MOUNTING DIMENSION (mm)	Trimless	110x54	119x53	209x108	152x101	152x101	428x200	478x200	240x180
POWER	48 V Magtrack		•						I
SPOT FIXATION	120 V Track	•		_	•				
	120 V Plug					•	•	•	•
		20	25				00	170	100
TECH DIMENSION	Visible opening	20	25	50	50	50	80	130	160
FINISH CHANNEL	. 25 Colors						0	0	•
	White						•	•	
	Black	•	•	•	•	•	•	•	
EEATLIDEC	Dealdight						0		T.







		O >		\bigcirc					A 2022		3	1		
2LOOK4 IN	SERTS	IMAGINE	CENTRIQ	SNOOKER	HANGOVER	LED LINE	CENTRIQ	MAGIQ PLUS WALLWASH	MAGIQ 4	MAGIQ 8	MAGIQ WALLWASH	MAGIQ HOLLOW WALLWASH	BIONIQ	IMAGINE
DIMENSION (mm)		Ø 60 / 75 / 90	Ø 30 / 40 / 55	Ø 72	Ø 40 L 150 / 300 / 450	25 x L (620 / 820 1020 / 1220)	Ø 60 / 95	393x50	135x35	267x35	267x35	167x35	Ø 95 / 125	Ø 75
PROFILE TYPE	20	•							T					
	25		•	•	•	•								
	50		■3/4	●3/4	●3/4	_	●5	●5	●6	●6	●6	● 6		
	80		_		_		<u> </u>	<u> </u>	_	_		-		•
	130													•
	160												•	
INSERTS	CCT: Kelvin	2700 / 3000 4000	2700 / 3000 4000	2700 / 3000 4000	2700 / 3000 4000	2700 / 3000 4000	2700 / 3000 4000	2700 / 3000 4000	2700 / 3000 4000	2700 / 3000 4000	2700 / 3000 4000	2700 / 3000 4000	2700 / 3000 4000	2700 / 3000 4000
	Lumen	870-2950	238-710	317-366	740-820	480-960	870-3680	3330-3780	680-760	1370-1520	1880-2170	1160-1360	1030-2110	870-2110
	Wattage	12.0-26.0	4.5-9.8	7.0	10.0	7.0-14.0	12.0-35.0	43.0	13.0	26.0	32.0	19.0	15.0-27.0	12.0-26.0
	Beam angle	10° / 18° 20° / 25° / 26° 40° / 60°	9° / 10° / 15° 17° / 22° / 24° 25° / 31° / 32° 33° / 35° / 36° 38° / 46° / 49°	55°	33° / 47° / 65°		8° / 10° 18° / 20° / 26° 40° / 60°		10° / 20° / 40°	210° / 20° / 40°			20° / 25° 40° / 60°	20° / 25° / 40°
FINISH SPOT	25 Colors		•											•
INISHISFOI	25 COIOI3													
CONTROL	ON/OFF	•	•	•	•	•	•	•	•	•	•	•	•	•
	1-10 V Dim	0	0	0	0	0	0	0	0	0	0	0	0	0
	DALI Dim	•	•	•	•	•	•	•	•	•	•	•	•	•
	Natural Dim												0	
OPTICAL	Reflector based	•	•	1	•		•	•	•	•	•	•		•
	Lens based		•	•	_		—		-		_			0
					1	1	1							
FEATURES	Korona Effect			0	0				0	0			•	
	Super Spot	•	•				•		•	•				•


O Optionally available | Status: 01/2018




2LOOK4 50 offers three profiles available as 48 V MAGTRACK (tool-free mounting), deeply recessed 120 V TRACK and a knife-edge 120 V PLUG (glare-free modules) variant.

2LOOK4 80 | 130 | 160

Additionally the 2LOOK4-family offers wide channels with tool-free installation, Multi Axis Positioning and optional back lights (160), available in three profiles with 80, 130 and 160 mm.

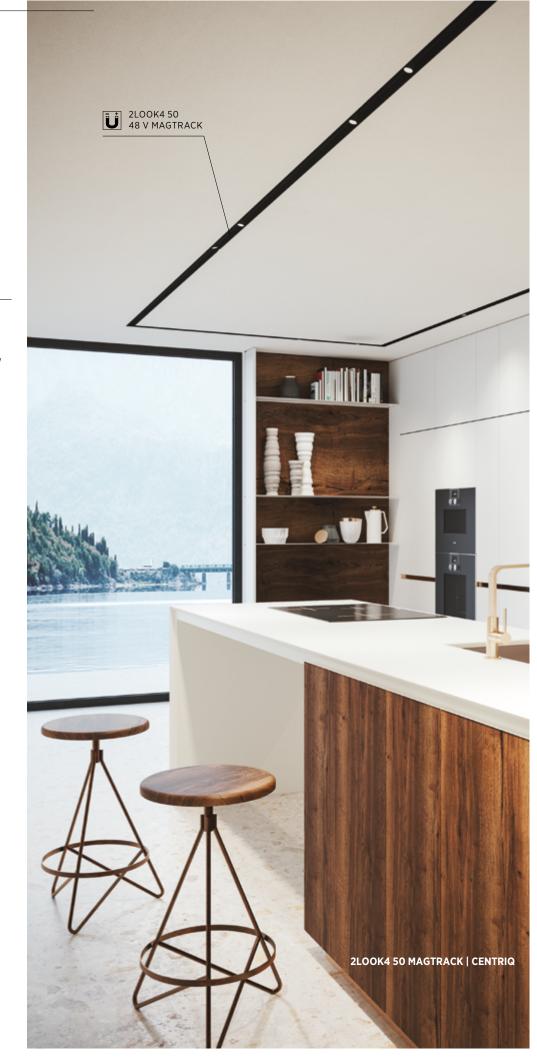

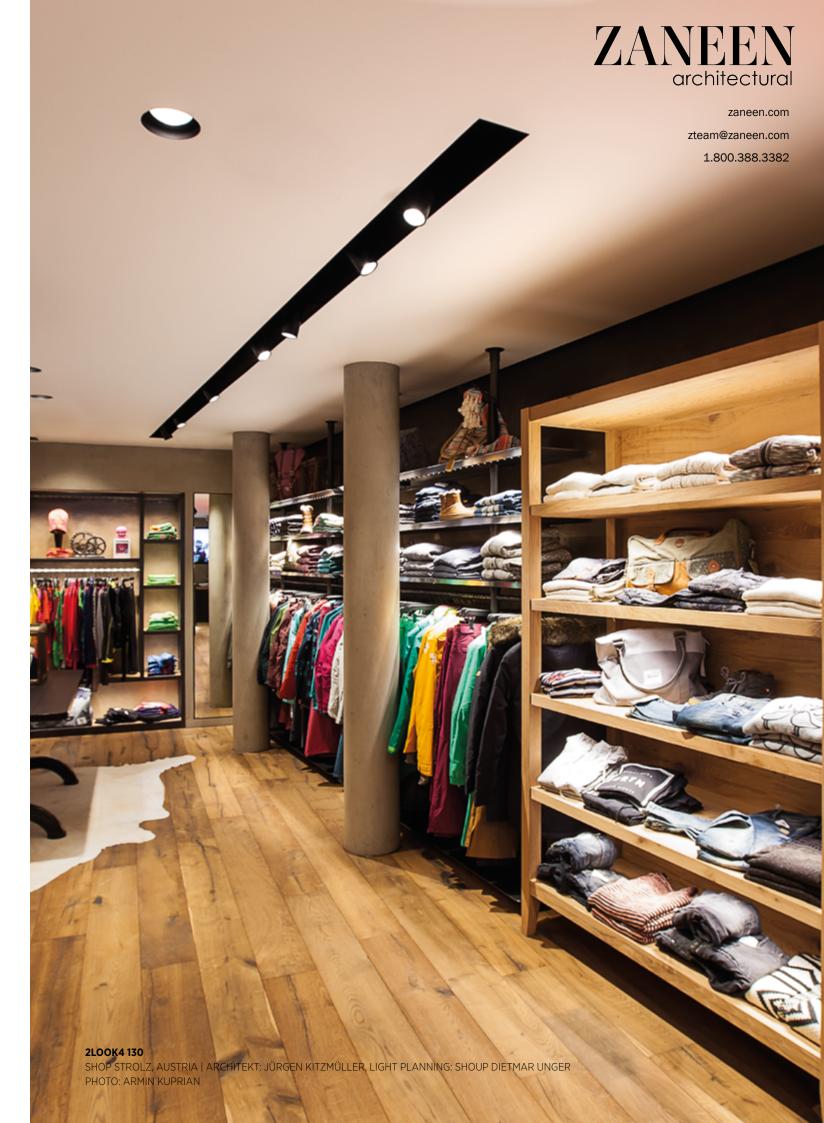

























RAL and any other special color on request



