
Minimal Track

Architectural









MINIMAL TRACK

Playful Minimalism

VERSATILE AND ALMOST INVISIBLE


The innovative MINIMAL TRACK lighting system combines pure minimalism with the latest technology. Its ultra-compact design makes the sophisticated technology almost invisible, leaving only elegant lines that integrate perfectly into the interior design.

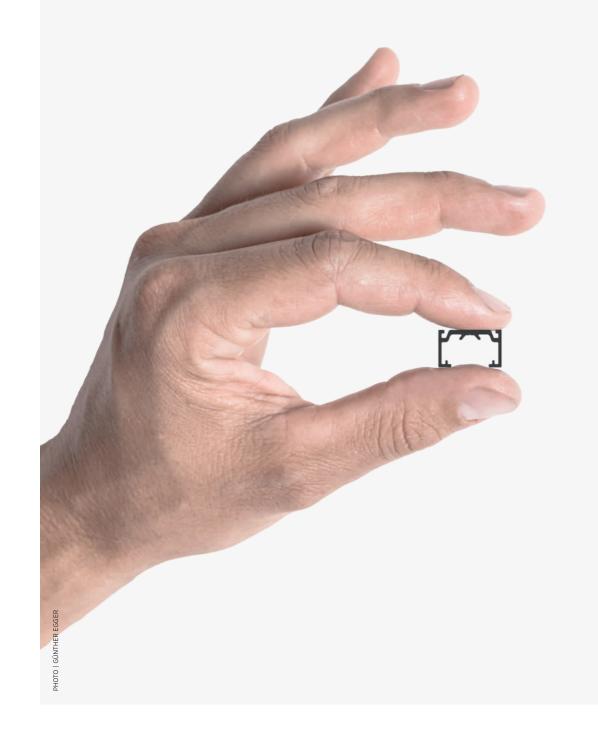

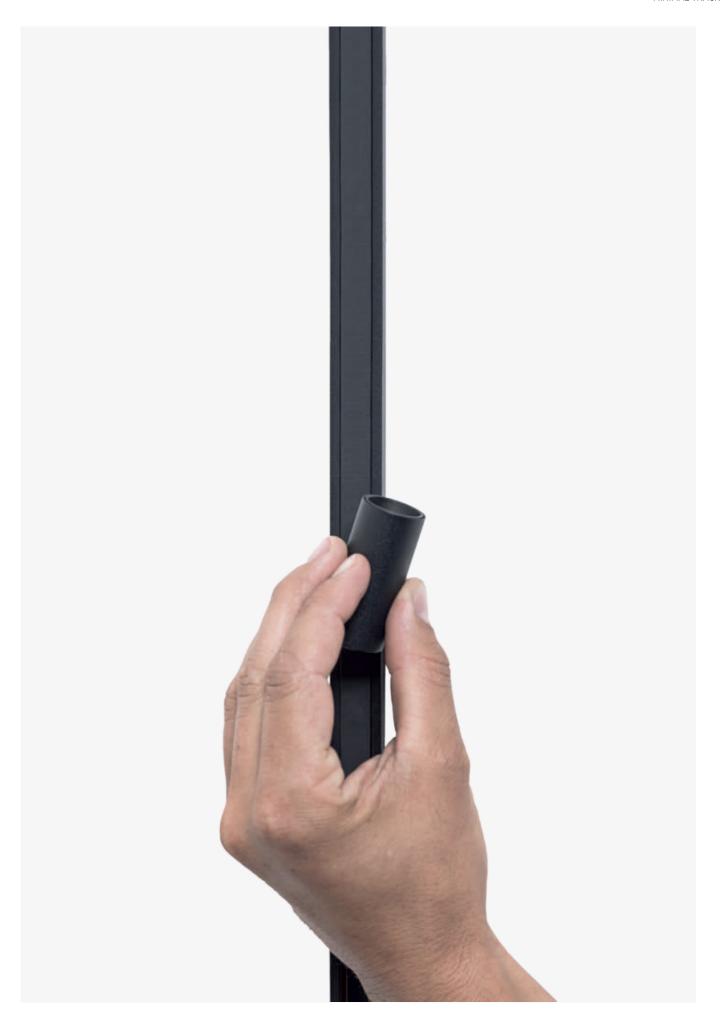





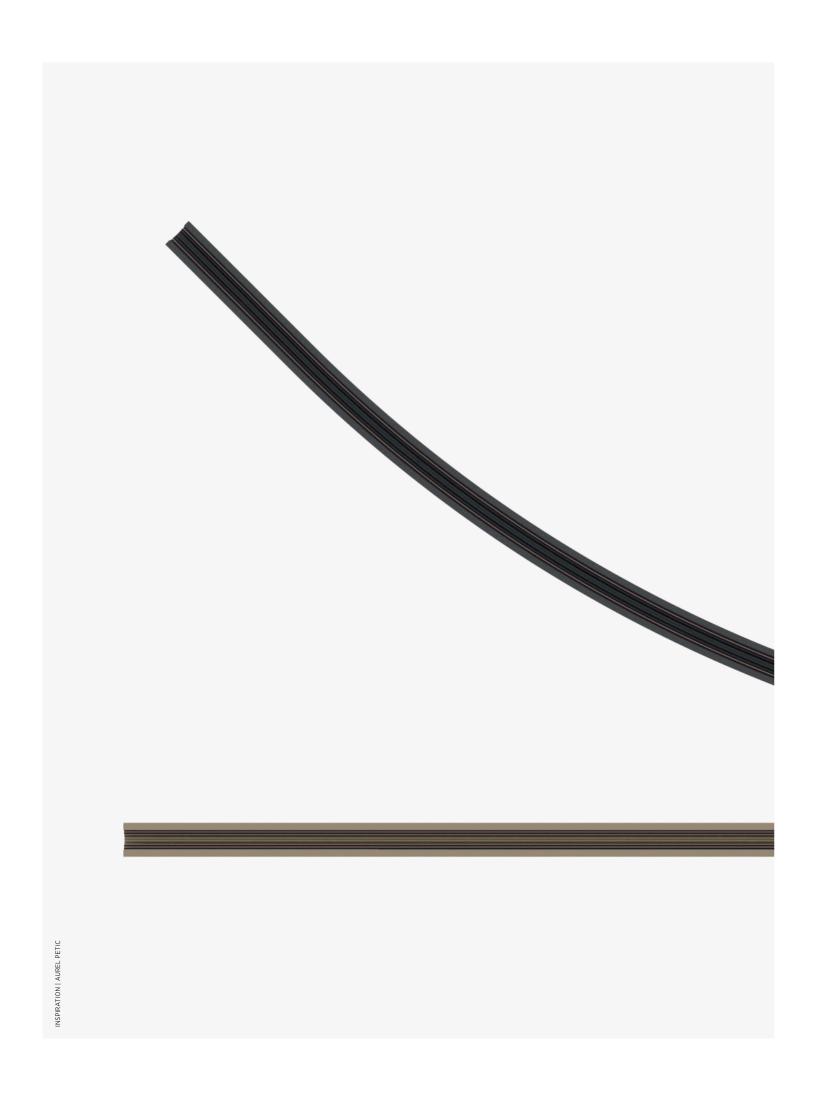

MINIMAL TRACK

MINIMAL ESSENCE

Minimalistic design, minimal installation effort, tailor-made result in the most simple way.

The MINIMAL TRACK allows you to simply design any line you want - available with 90° integrated connectors for elbows on the same surface or to jump ceiling to wall or T- and X-connectors with two different aesthetics to match various tastes in interior design. The track can be easily cut on site to perfectly fulfil any project requirements.



COLOR MAKES A DIFFERENCE

Unique colors and finishes, with infinite combinations,
































EASY INTEGRATION


TRACK MOUNTING



TRACK MOUNTING The track is conceived to be easily cut on site, and directly screwed to the ceiling for a tailor-made result in each in-


Article-Number for a set of 50 pieces of mounting screws: 800-1427

CROSSINGS




CROSSINGS Complex connection pieces belong to the past with MINIMAL TRACK. The linear elements can be used to create crossings in the easiest way. Even after the installation, adaptions can be made with minimal effort.

ELECTRICAL CONNECTION




ELECTRICAL CONNECTION Every T-Connector is enclosed with one, every X connector with two flexible cross adapters. An electrical connection of the pieces can be established with these components with ease.

COVERING THE CROSSINGS



COVERING THE CROSSINGS Whether as a colorful accent in the PROLICHT colors or synchronized with the color of the track, the covers are placed as a final step.

INSERTS



INSERTS Place and remove any insert wherever you want by simply pulling it out and snapping it in without any tools needed.

TRACKMASK



TRACKMASK A black flexible rubber cover, easy to cut directly on site after positioning the inserts and integrated inside the track, is the final touch to furtherly minimize the appearance of the MINIMAL TRACK.

SCALE 1:1

enable a holistic interior design concept to be completed or certain highlights to be created with our 25 PROLICHT colors. RAL Classic or any other special color is available on request.
























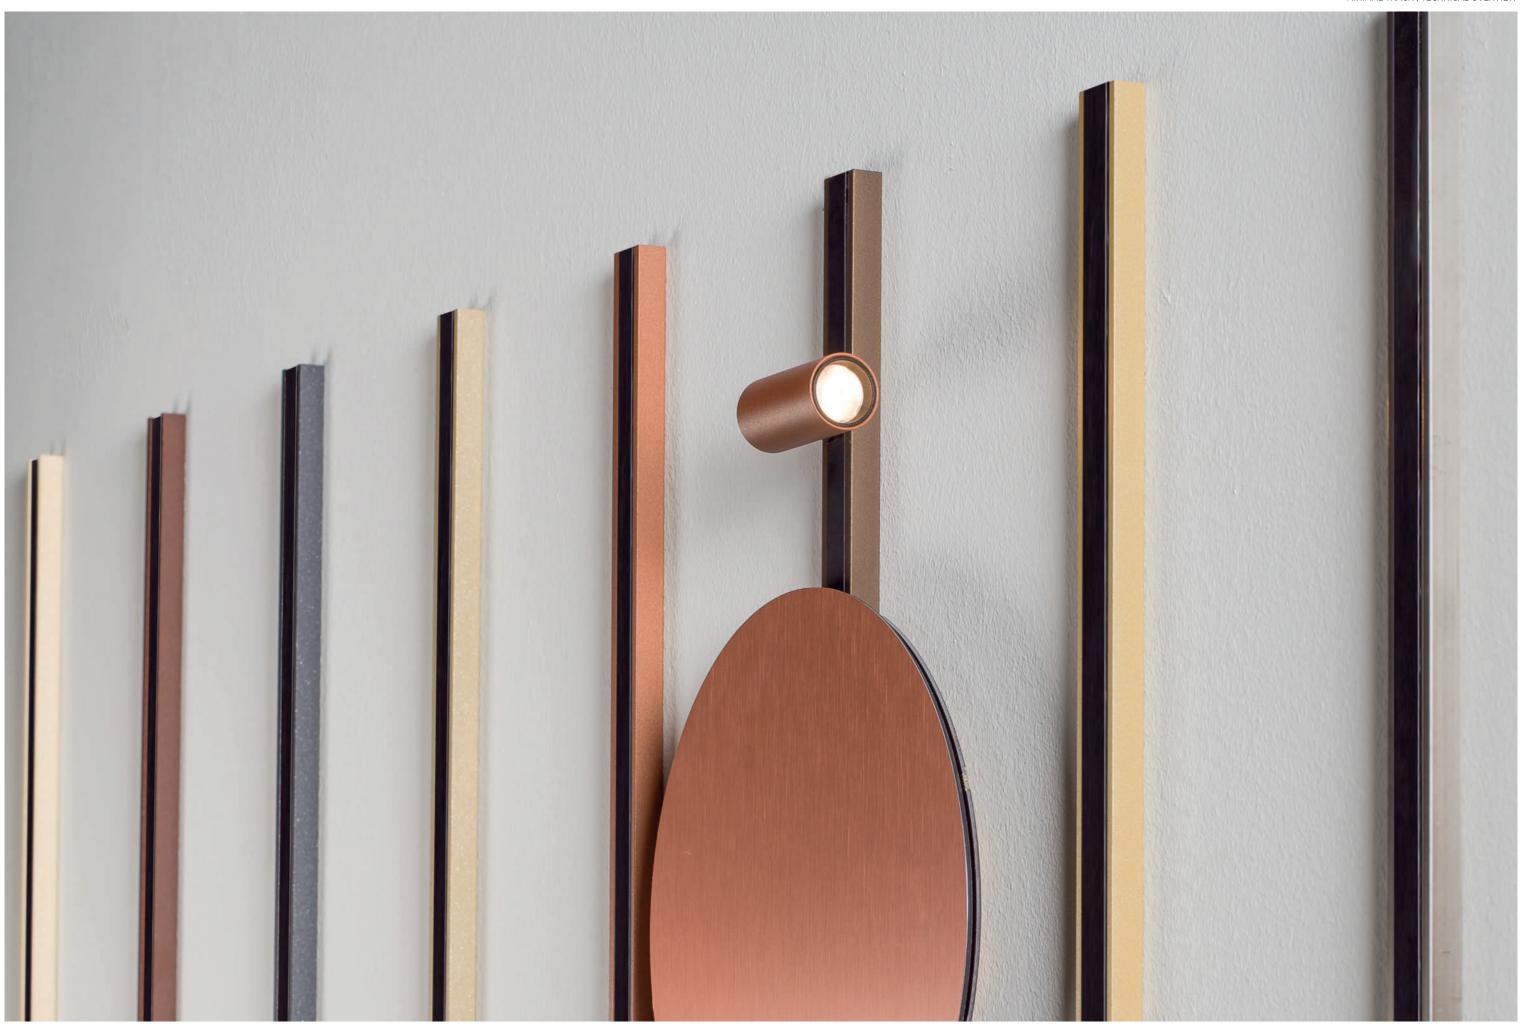

STRAIGHT LINES

LINEAR CONNECTOR

COLOR: BLACK ART.-N°: 350-1868

FLAT CORNER CONNECTOR

COLOR: BLACK ART.-N°: 350-1869

DIHEDRAL CONNECTOR

COLOR: BLACK ART.-N°: 350-1870

90° DUMMY TRACK
QUICK INSTALLATION

COLOR: BLACK ART.-N°: 350-1876

90° DIHEDRAL DUMMY TRACK QUICK INSTALLATION

> COLOR: BLACK ART.-N°: 350-1877

ENDCAP TRACK

COLOR: BLACK ART.-N°: 350-1872

G X-CONNECTOR

AVAILABLE IN 25 PROLICHT COLORS ART.-N°: 350-1994

T-CONNECTOR

AVAILABLE IN 25 PROLICHT COLORS ART.-N°: 350-1995





IMAGINE MICRO | COLOR 02 BLACK VELVET | MICRO LINE



QUICK CONNECTOR

To guarantee a quick and easy installation, we offer additional track components. This black connector is especially suited to facilitate the installation of the MINIMAL TRACK.



Q QUICK CONNECTOR WALL TO CEILING



MITER JOINT

The track is designed to be easily cut on site and for a seamless installation of corner elements it is possible to cut the extremities of straight elements at an angle of 45° for a miter-joint connection. If other angles are needed - for a sloping roof for example - the joint can be individualized with a flexible connector.



B MITER JOINT WALL TO CEILING

YOUR PERFECT CURVE!

The MINIMAL TRACK offers many solutions to compose curved profiles, with 45, 90° and 180° curved connectors. Individualized solutions can be evaluated on request.

All of the curved elements are available in the 25 PROLICHT colors.

CURVED CONNECTOR Ø400MM / 90°

AVAILABLE IN 25 PROLICHT COLORS ART.-N°: 350-1892



CURVED CONNECTOR Ø800MM / 45°

AVAILABLE IN 25 PROLICHT COLORS ART.-N°: 350-1893



CURVED TRACK Ø1600MM / 45°

AVAILABLE IN 25 PROLICHT COLORS ART.-N°: 350-1894



CURVED Ø1600MM / 90°


AVAILABLE IN 25 PROLICHT COLORS ART.-N°: 350-1895



CURVED TRACK Ø1600MM / 180°

AVAILABLE IN 25 PROLICHT COLORS ART.-N°: 350-1904



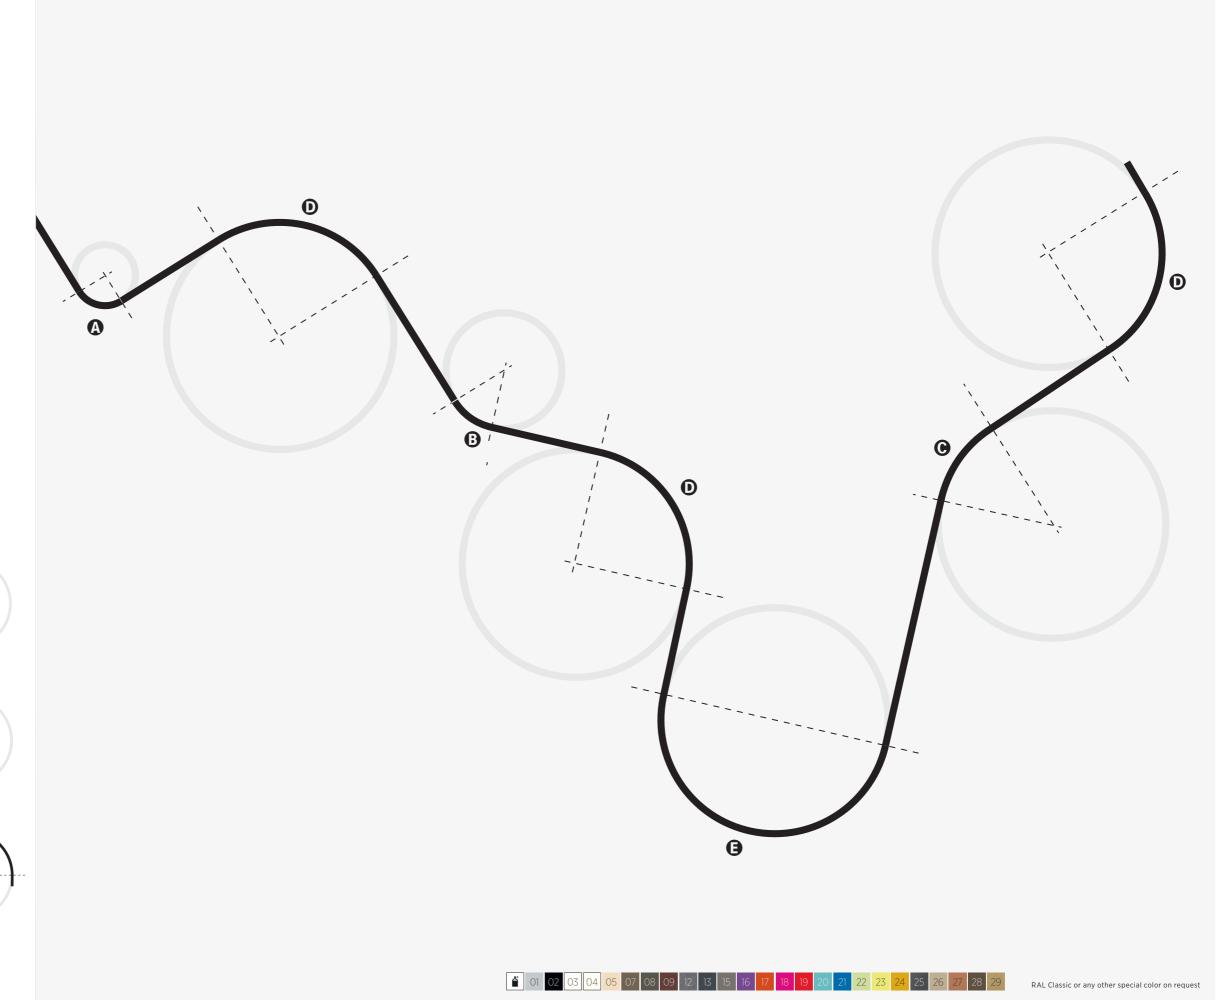






INSERT: SNOOKER SHINE - 02 BLACK VELVET | SHINE RING WHITE

INSERTS



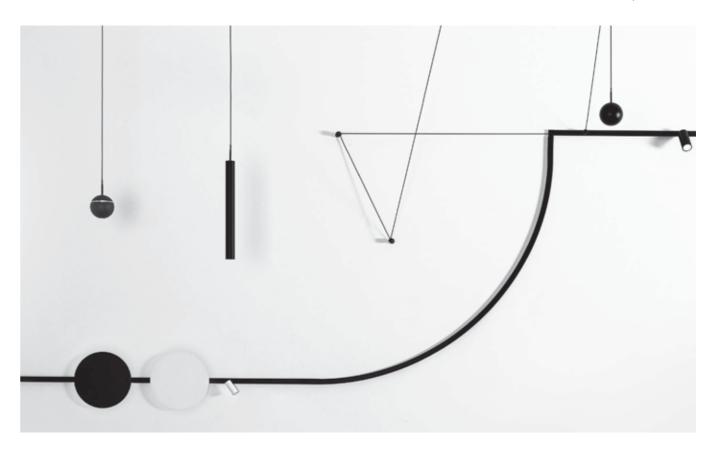



MINIMAL TRACK offers a wide variety of inserts - the selection ranges from pendant luminaires over indirectly illuminated DISQs to decorative elements. The system guarantees exceptional flexibility to adapt the lighting concept to any room situation.

Optional components and colored accessories allow unlimited scope for individualized design concepts. This lighting system is not only suitable for creating the perfect lighting atmosphere, but also adds individuality and exceptionality to any space.

INSERTS OVERVIEW

IMAGINE MICRO 20

AVAILABLE IN 25 PROLICHT COLORS ART.-N°: 7-02120-02



IMAGINE MICRO 35

AVAILABLE IN 25 PROLICHT COLORS ART.-N°: 7-02121-02



MAGIQ MICRO

COLOR: BLACK ART.-N°: 7-02400-02





AVAILABLE IN 25 PROLICHT COLORS ART.-N°: 7-02232-02

SNOOKER METAL

AVAILABLE IN CHROME FINISH ART.-N°: 7-02409-02



HANGOVER

AVAILABLE IN 25 PROLICHT COLORS ART.-N°: 7-02236-02



AVAILABLE IN 25 PROLICHT COLORS ART.-N°: 7-02153-02

DISQ ROUND METAL

AVAILABLE IN 3 FINISHES ART.-N°: 7-02152-02







DISQ SQUARE

AVAILABLE IN 25 PROLICHT COLORS ART.-N°: 7-02155-02

DISQ SQUARE METAL

AVAILABLE IN 3 FINISHES ART.-N°: 7-02154-02














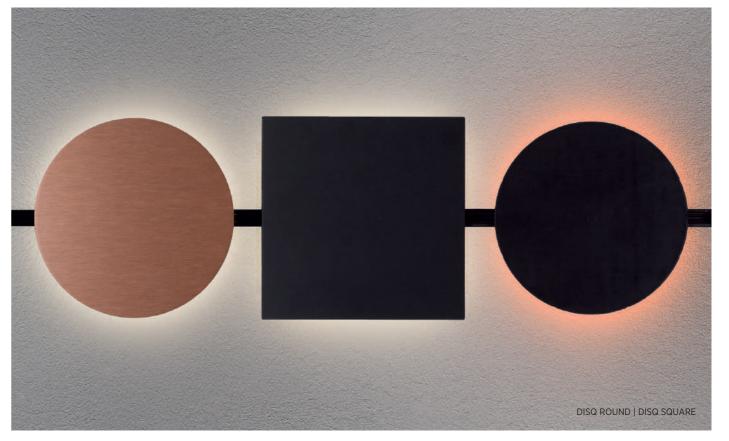



IMAGINE MICRO

The ultra-compact design makes the sophisticated technology almost invisible, leaving only elegant lines that integrate perfectly into the interior design. The IMAGINE MICRO spotlights are available in 25 PROLICHT colors. Special colors can be ordered on request.






IMAGINE MICRO 20 ART.-Nº 7-02120-02

Ø 23mm L: 72 mm

IMAGINE MICRO 35 ART.-Nº 7-02121-02

Ø 35 mm L: 95 mm


	LUMEN MAX.	
	202 lm	
	WATT	
	3.7 W	
	ССТ	
2700 K	3000 K	4000 K














RAL Classic or any other special color on request

YOUR PERFECT FOCUSING For the perfect definition of your light setting, not only each spot can be tilted from 0° to 90° and rotated 355°, but comes also equipped with a tool-less locking system, to fix in position the desired rotation, even when spots are installed in a vertical track but comes also equipped with a tool-less locking system. The spots can be easily fixed in the desired position, even when they are installed in a vertical track.





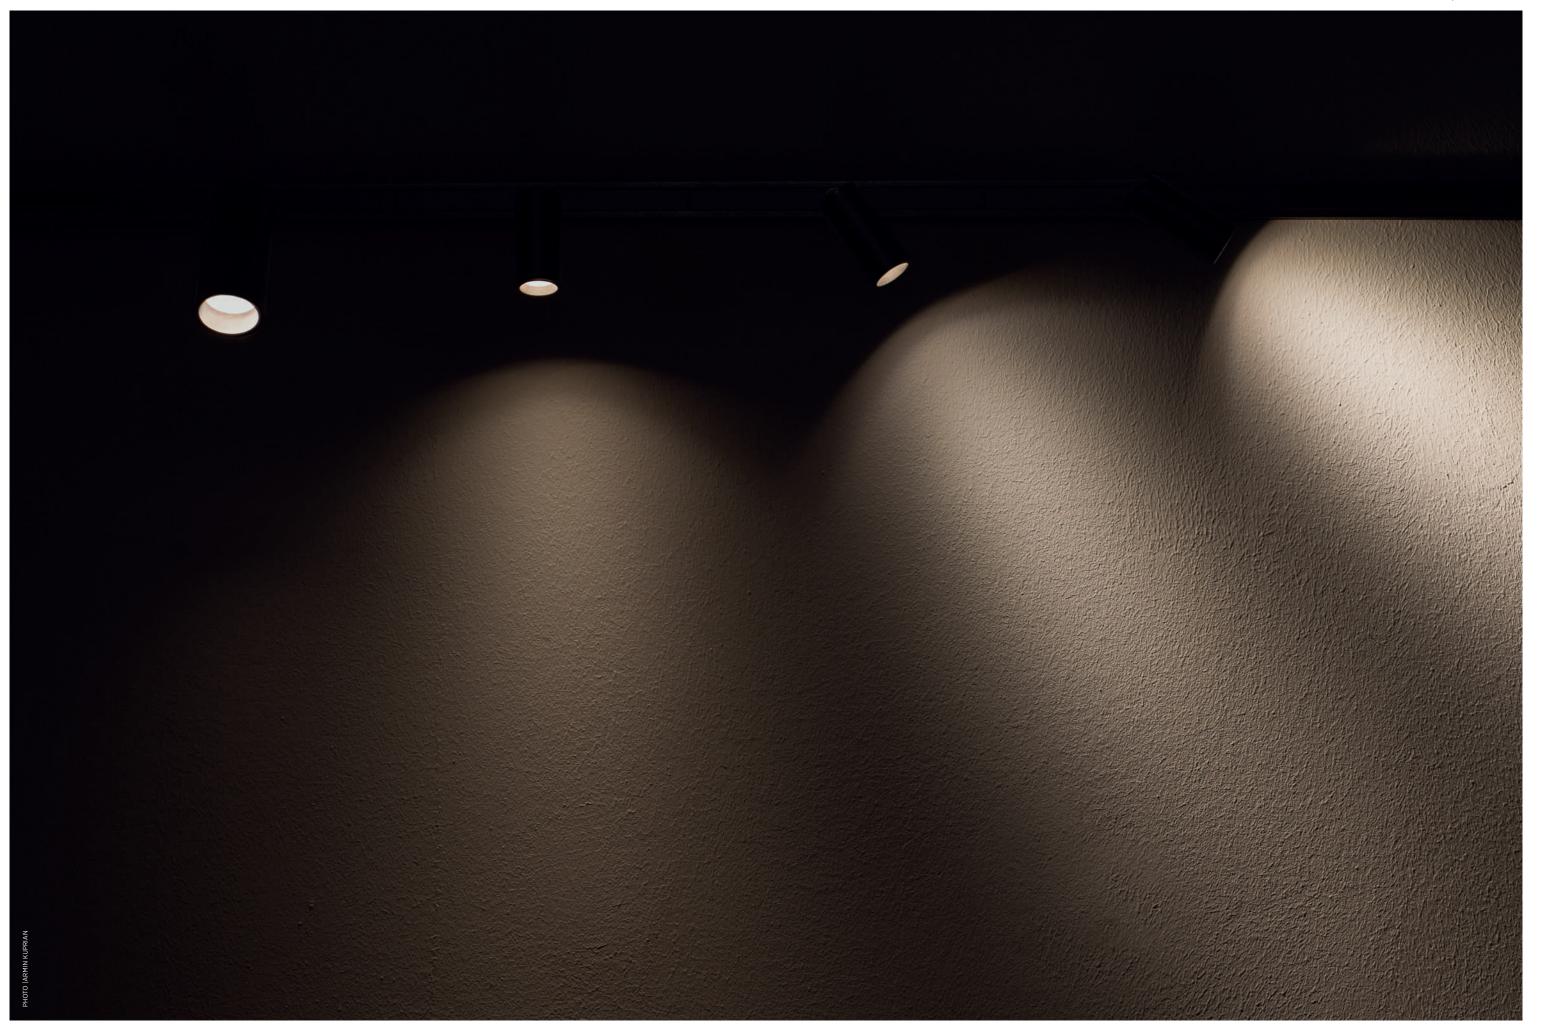



The MAGIQ MICRO is part of the MAGIQ family and works with DALI, CASAMBI or PUSH DIM. The inserts can be lined up to fill the whole track with the MAGIQ inserts while the distance of the single dots stays always the same. This leads to a coherent appearance of the system and uniform illumination.



MAGIQ MICRO ART.-Nº 7-02400-02


L: 300mm x 11 H:7 mm


LUM	IEN MAX.
	129 lm
,	WATT
	7,3 W
	ССТ
2700 K	3000 K



MICROLINE

The specially developed LED Lines can be controlled individually with DALI, CASAMBI and PUSH DIM. The MICROLINE is an essential part of the range of inserts for the MINIMAL TRACK and offers shadowfree LED lines to be integrated into the architecture. Within the track, the lines are seamlessly installed and keep the appearance of the track as minimalistic as intended.

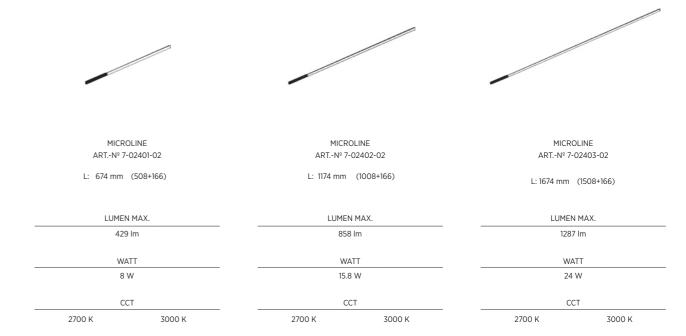


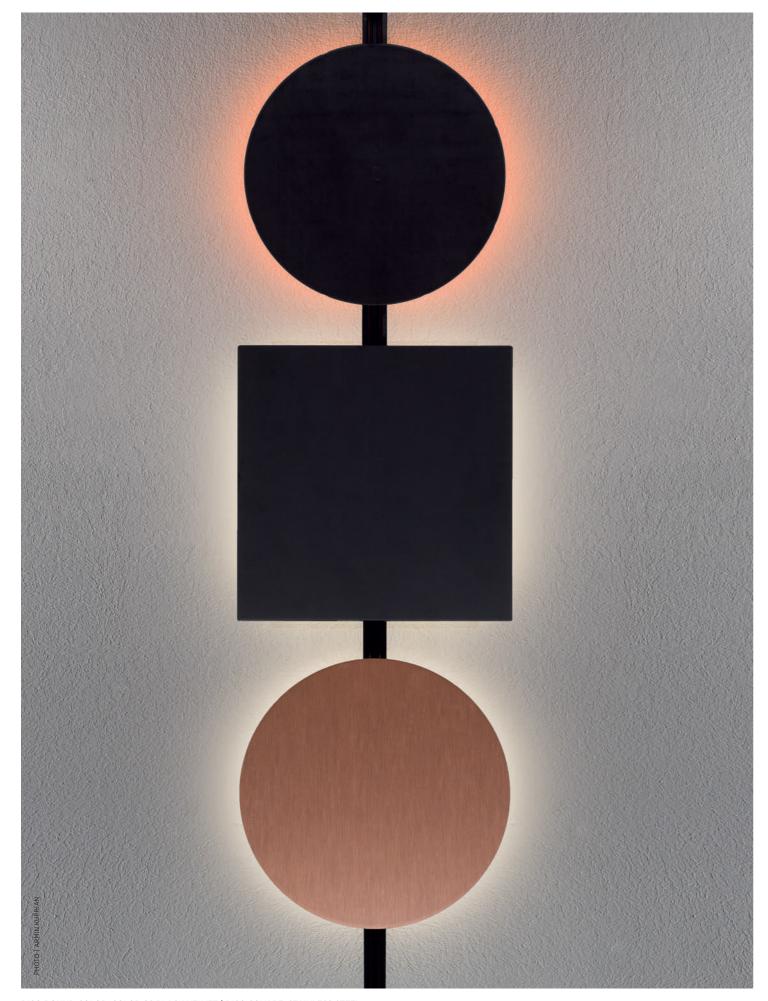

DISQ ROUND COLOR, COLOR 02 BLACK VELVET | DISQ SQUARE, STAINLESS STEEL

DISQ ROUND and DISQ SQUARE are new inserts for the MINIMAL TRACK, offering refined complements to the family. With its discrete 2700K indirect emission and its DALI DIM functionality, DISQ offers maximum lighting comfort.

The inserts are available in two different versions: with a metal plate, which is available in copper, chrome or a stainless steel finish, and a color version, that can be individualized in our 25 PROLICHT colors.

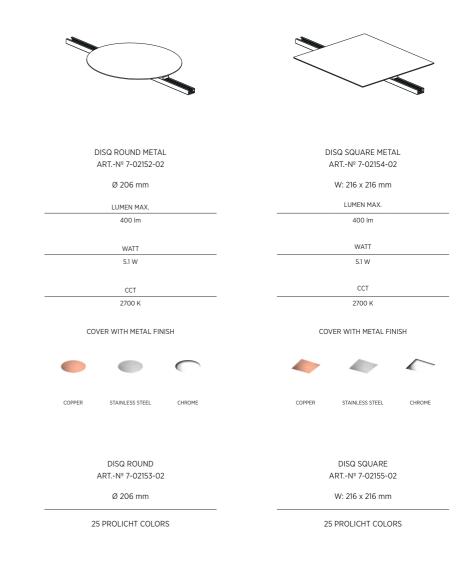

 6
 01
 02
 03
 04
 05
 07
 08
 09
 12
 13
 15
 16
 17
 18
 19
 20
 21
 22
 23
 24
 25
 26
 27
 28
 29

RAL Classic or any other special color on request


YELLOW ORANGE RED BLUE GREEN

CAN HAVE ACCESSORY DISQ SQUARE | AURA COVER


The DISQ ROUND | SQUARE inserts can also be equipped with the AURA COVER accessories: softening the light, highlighting the shape and creating a floating colored effect.



MINIMAL TRACK, COLOR 02 BLACK VELEVET | DISQ ROUND, COPPER | AURA COVER: YELLOW

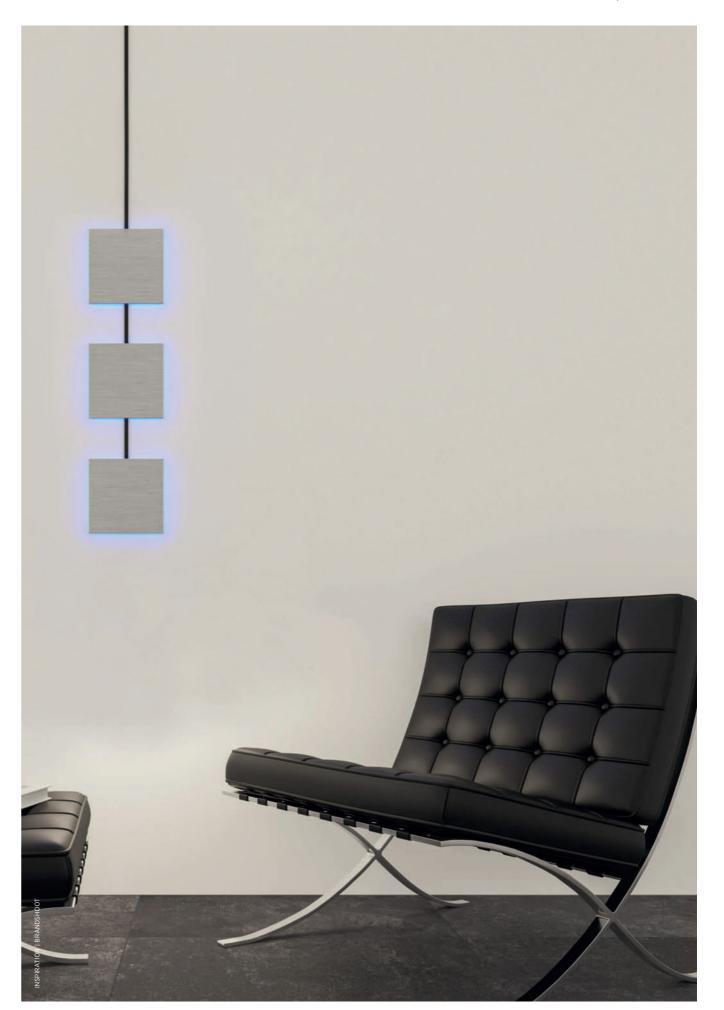


MINIMAL TRACK, COLOR BLACK VELVET | DISQ SQUARE, STAINLESS STEAL | AURA COVER: BLUE

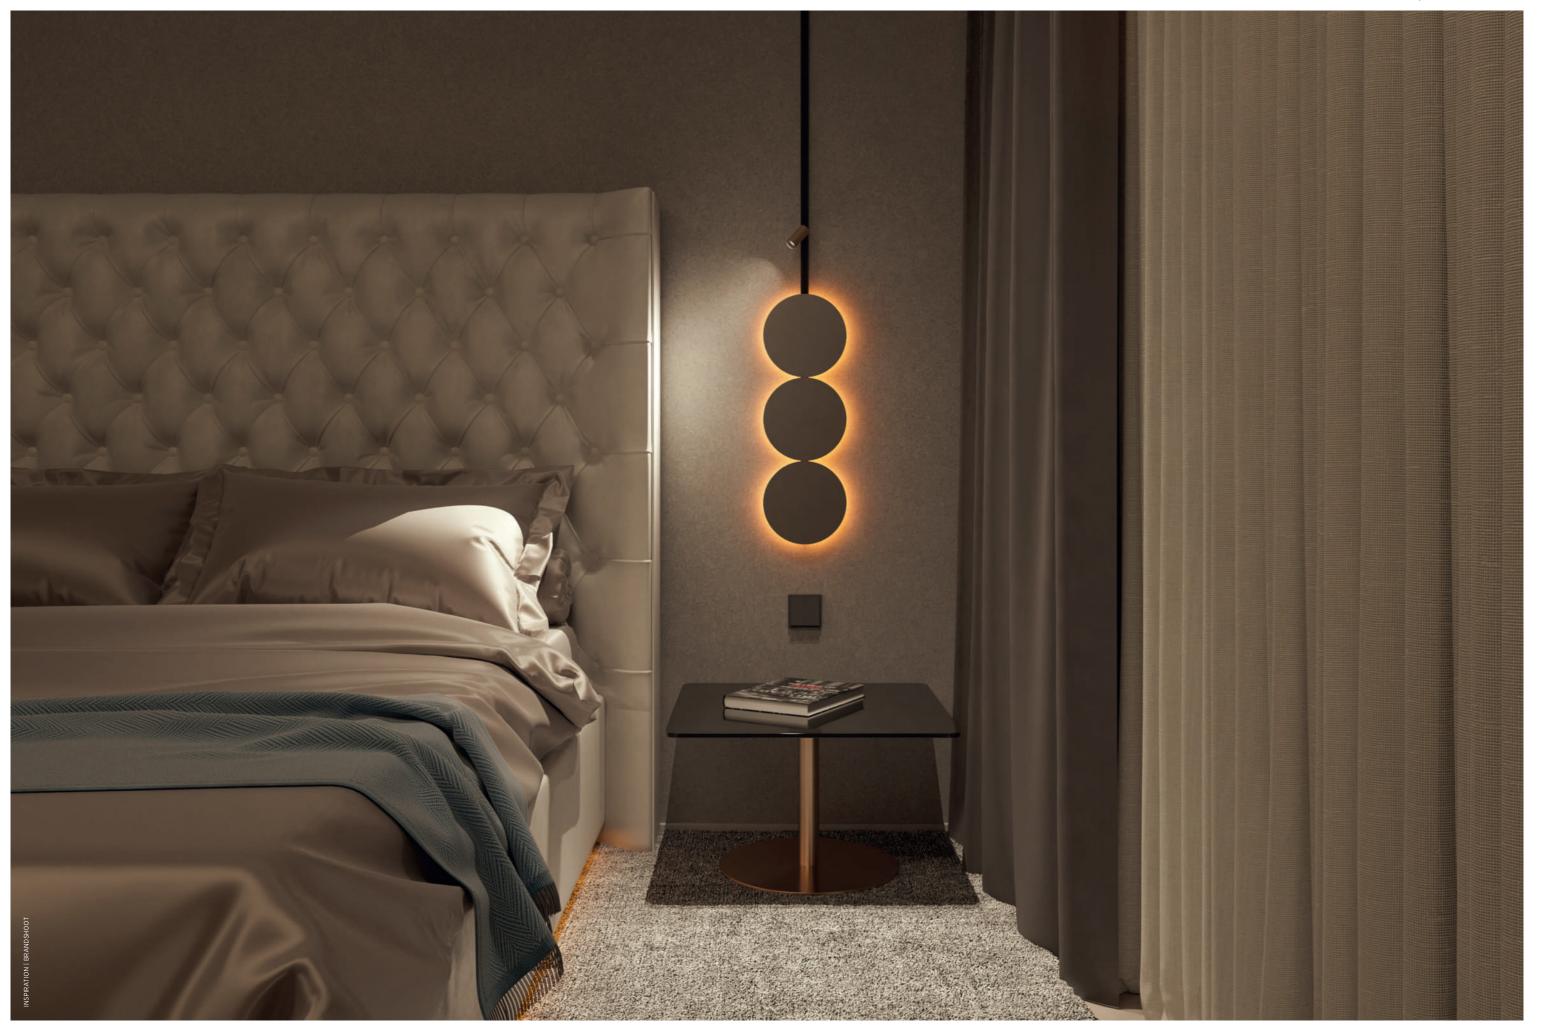



SNOOKER The iconic spherical luminaire SNOOKER is a real eye-catcher on its own or grouped in multiples as a light installation. Configurable in the PROLICHT colors, with an additional KORONA SHINE RING and with adjustable cable lengths, SNOOKER offers plenty of design freedom. The unique MICRO DOT lens provides pure light with optimum glare control.

The integrated lens optics allow beam angles of 32° and 58° while offering a maximum effect with a minimal light emission opening.



SNOOKER ART.-Nº 7-02409-02

Ø 72 mm

LUMEN MAX.	
352 lm	
WATT	
6.5 W	
CCT	
	4000 K
	352 lm WATT

BEAMWIDTH



25 PROLICHT COLORS


CAN HAVE ACCESSORY | SHINE RING




 6
 01
 02
 03
 04
 05
 07
 08
 09
 12
 13
 15
 16
 17
 18
 19
 20
 21
 22
 23
 24
 25
 26
 27
 28
 29

RAL Classic or any other special color on request



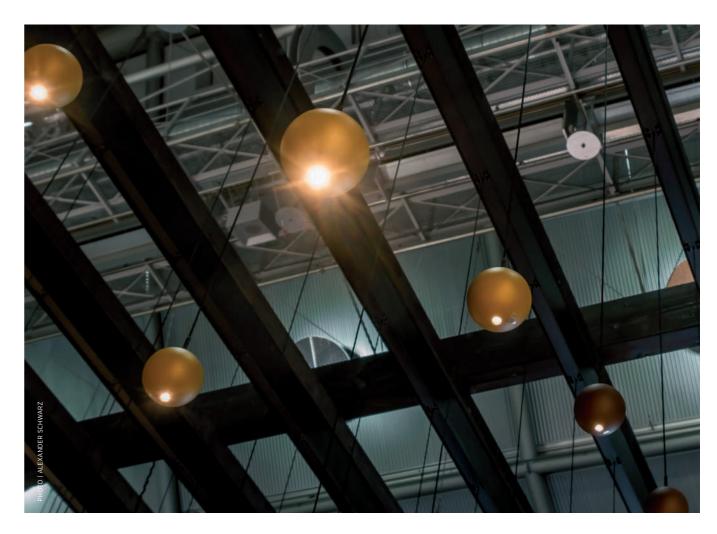

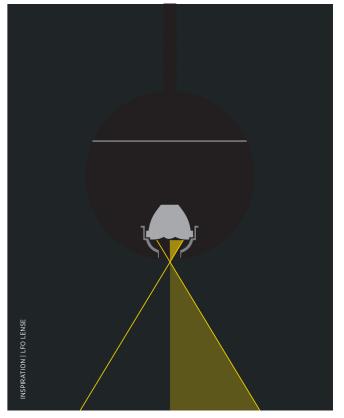


SNOOKER, COLOR 27 COPPER MINE, SHINE RING WHITE | SNOOKER, COLOR 29 JAZZ GOLD






The HANGOVER PLUG suspended spot together with the PLUG EXSTENSIONS allows a manual adjustment of the wire suspension: the spotlights are available with a rope length of 2 or 4 metres and can be manually shortened or lengthened by rolling into the canopy.


An ingenious docking system guarantees quick replacement and quick locking of the various HANGOVER PLUG modules: this way, the lights can be exchanged at will, giving room for a new look over and over again. The docking system is also available for other product families and guarantees that other luminaires can also be easily mounted (SNOOKER | MELT and OPAL by Tom Dixon)

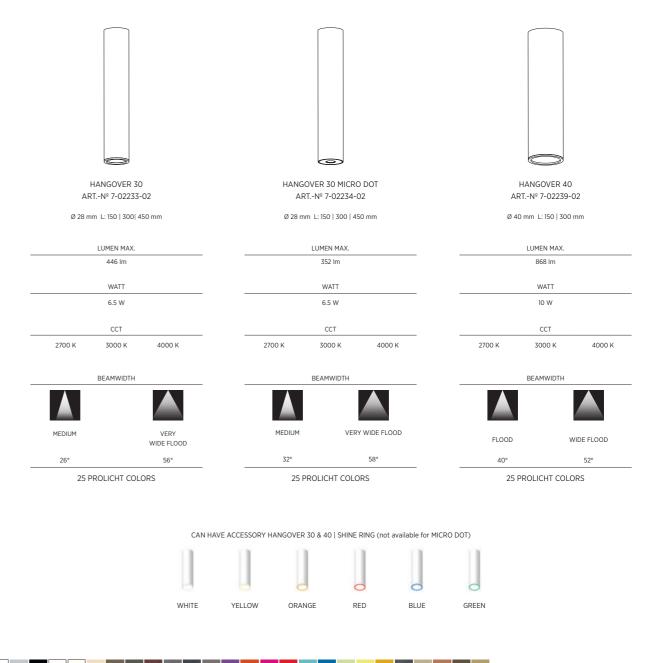

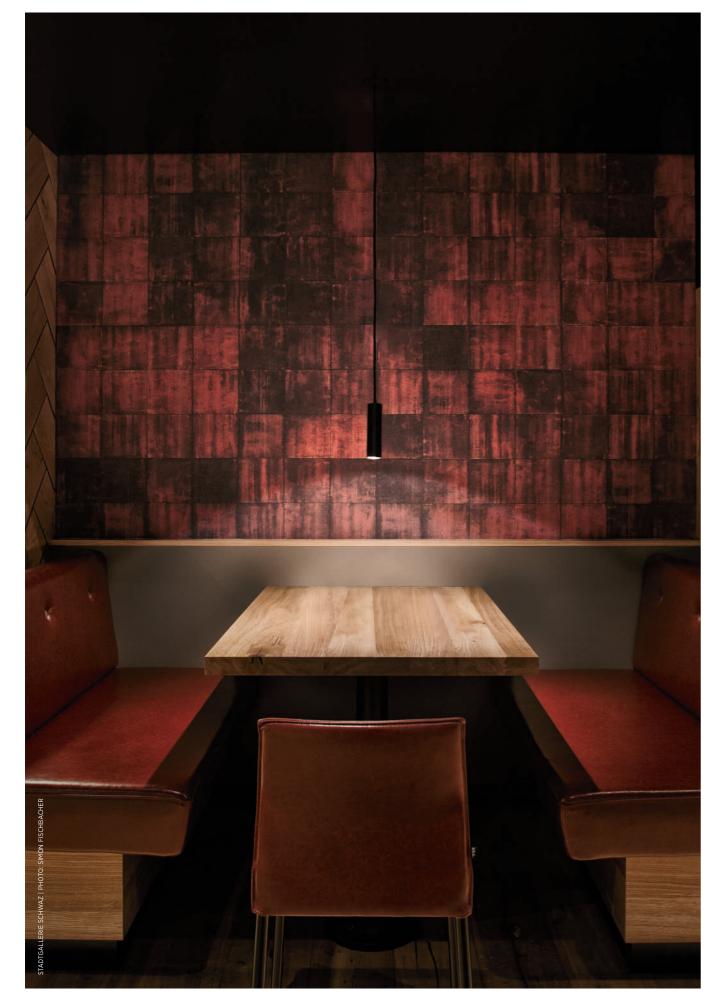

HANGOVER | COLOR 02 BLACK VELVET | CORONA CONE 02 BLACK VELVET






LICHT colors.




SHINE RING The luminaire can also be equipped with a luminous ring in one of 6 changing the light color. The cone can differ colors. KORONA SHINE creates colorful accents and atmospheric highlights.

MICRO DOT The integrated lens optics allow beam angles between 24° and 58°. The available variants with MICRO DOT technology offer maximum effects. JUST LIGHT - NO GLARE



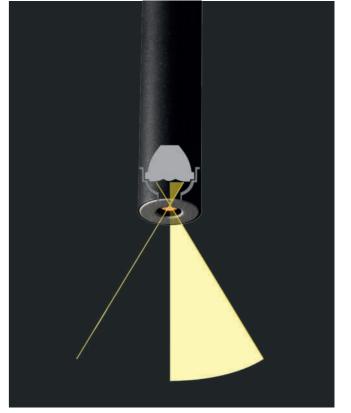



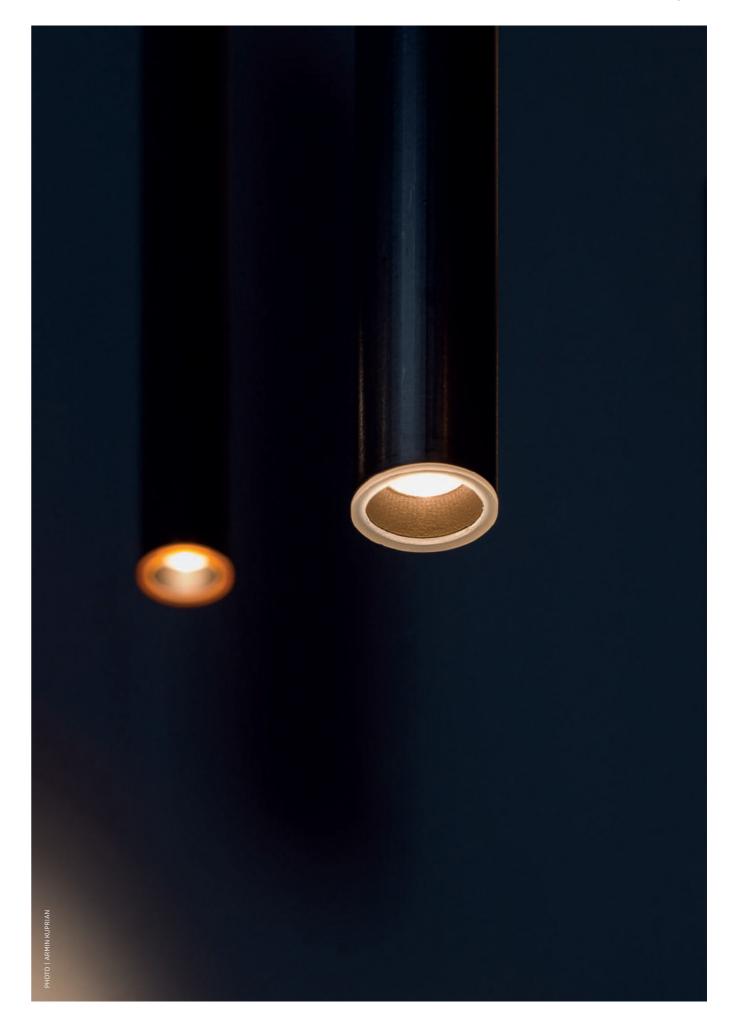



ACCESSORIES FOR PENDANT INSERTS





With the optional cable loop components and the various cable roller sizes, an adaptation in length is possible at any time in the simplest way. Individualization in the 25 PROLICHT colors is possible so that the components fit perfectly into the existing room concept.




With the plug connector, SNOOKER and HANGOVER PLUG luminaires can be easily exchanged at any time.











The main goal of this system is to bring illumination to the places where it is needed - this means that the MINIMAL TRACK liberates the designer from thinking about where the power outlet is and enables a highly individualistic design vision.








Minimalistic design, minimal installation effort, tailor-made result in the most simple way - that's the MINIMAL TRACK system. Now it can be equipped with our well-known SNOOKER and HANGOVER inserts to give you even more possibilities to enrich your design concept.

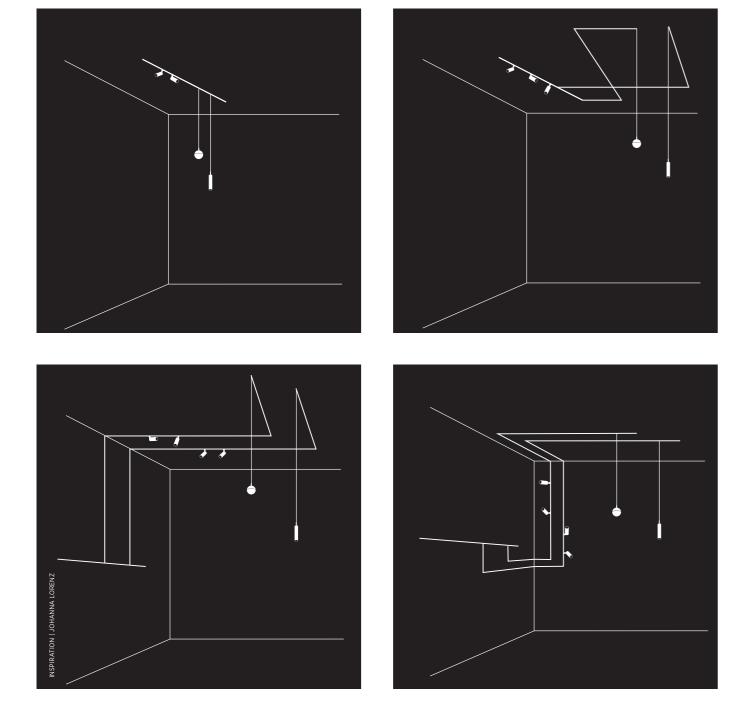

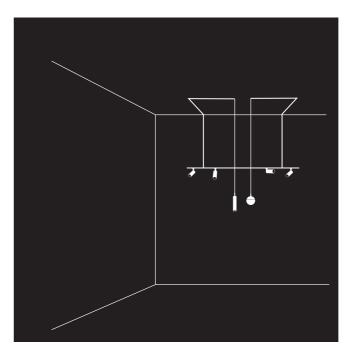






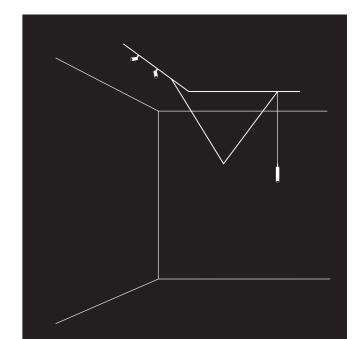






EXACTLY THE LIGHT YOU WANT

Every moment, every day and every situation is different. Up to 64 inserts for the MINIMAL TRACK can be dimmed individually, in groups or together with DALI and CASAMBI. This enables complete control of your lighting atmosphere.

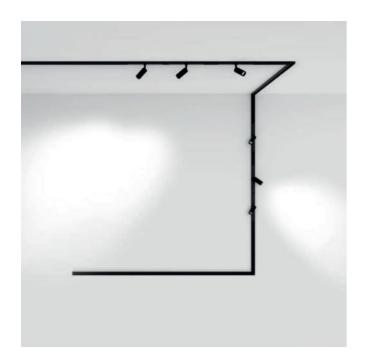




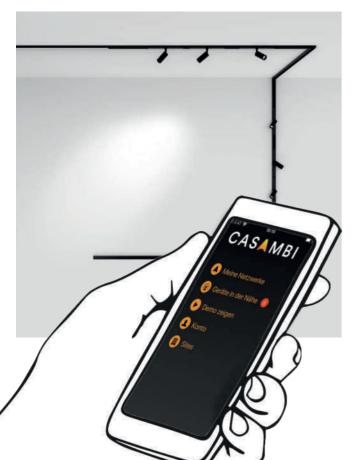



Despite its exceptionally compact size, the MINIMAL TRACK is designed as a DALI track that can be integrated into any lighting control system. It has two conductors dedicated to DALI in order to enable completely individual control of each installed luminaire.

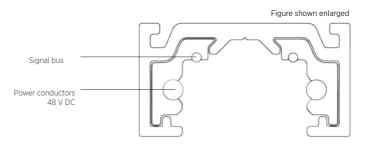

64 ADDRESSES

DALI offers individual control of each sing-le luminaire, with the possibility of managing groups and scenarios.



8 ADDRESSES

The CASAMBI control allows wireless regulation of up to eight groups of fittings, through physical commands or a mobile App.



1 ADDRESS


The PUSH DIM solution offers simple control of all the fittings in the same line that can be easily dimmed with a standard pushbutton.




1 ADDRESS


Simply ON / OFF without any control



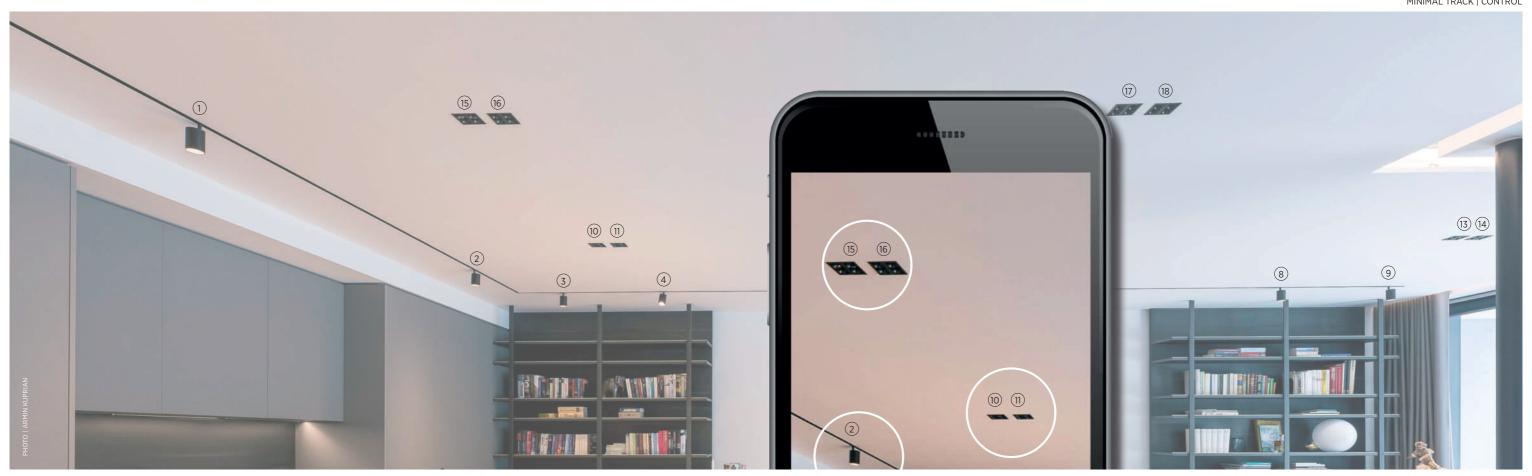

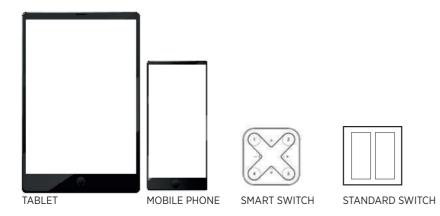

CONNECTION EXAMPLE

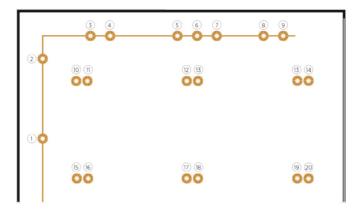

EXACTLY THE CONTROL YOU NEED

PUSH DIM | 1 ADRESS


All of the inserts are dimmed in parallel and the last scene is stored.

CASAMBI | 8 ADRESSES

Up to eight individual spots or groups and scenes can be controlled with CASAMBI.

DALI 2 | 64 ADRESSES

With DALI, 64 inserts can be individually programmed and saved scenes are available to be fetched from the storage. With this control, every room can be individually programmed or integrated into a holistic DALI solution for the whole object. In addition, a smaller housing of the control can be integrated into switch boxes to save space.

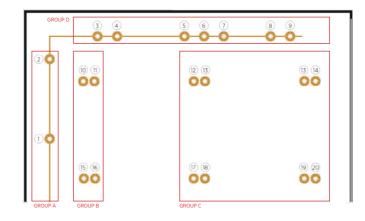

COLOR MAKES A DIFFERENCE








28

MELLOW YELLOW

MINIMAL TRACK

☐ BEAMWIDTH | LEGEND

Super Spot	SS	0° - 10°
Spot	S	10° - 25°
Medium	М	25° - 35°
Flood	F	35° - 45°
Wide Flood	WF	45° - 55°
Very Wide Flood	VWF	55° - 65°

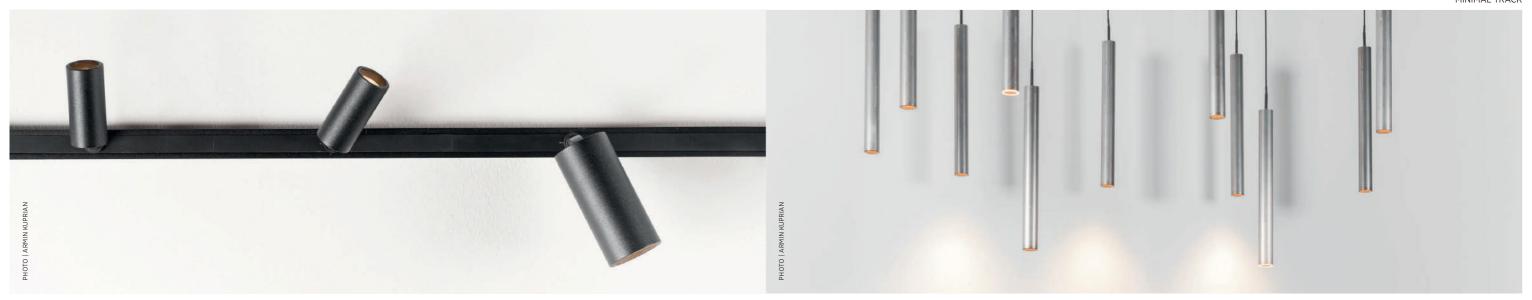

IMAGINE MICRO 20 IMAGINE MICRO 35





COLOR TEMPERATURE CCT

2700 K 3000 K 4000 K

BEAMWIDTH

SPOT 18° up to MEDIUM 26°







IMAGINE MICRO

DESCRIPTION	DIMENSION mm		CCT		LUMEN MAX.	WATT	CRI	ARTN°
IMAGINE MICRO 20	Ø 23 H: 50	2700	3000	4000	236	3.7	90	7-02120-02
IMAGINE MICRO 35	Ø 35 H: 76	2700	3000	4000	669	8.6	90	7-02121-02




HANGOVER


25 PROLICHT COLORS

DESCRIPTION		DIMENSI	ON mm			CCT		LUMEN MAX.	WATT	CRI	ARTN° L150	ARTN° L300	ARTN° L450
HANGOVER PLUG	Ø 28 x	L: 150	L: 300	L: 450	2700	3000	4000	446	6.5	90	7-02233-02	7-02235-02	7-02237-02
HANGOVER PLUG	Ø 40 x	L: 150	L: 300		2700	3000	4000	868	9.8	90	7-02239-02	7-02240-02	•
HANGOVER PLUG MICRO	Ø 28 x	L: 150	L: 300	L: 450	2700	3000	4000	352	6.5	90	7-02234-02	7-02236-02	7-02238-02



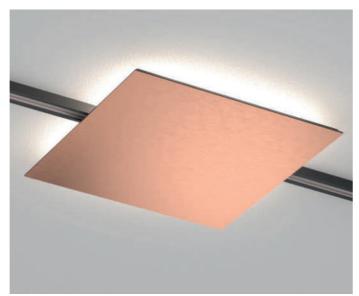



















COLOR TEMPERATURE CCT



INDIRECT



DISQ METAL ROUND & SQUARE





DISQ METAL ROUND & SQUARE

DESCRIPTION	DIMENSION mm		CCT		LUMEN MAX.	WATT	CRI	ARTN°
DISQ ROUND METAL	Ø 206	2700	•	•	400	5.1	90	7-02152-02
DISQ SQUARE METAL	216 x 216	2700	•		400	5.1	90	7-02154-02























COLOR TEMPERATURE CCT

2700 K



BEAMWIDTH

INDIRECT



DISQ ROUND & SQUARE (POWDER COATED)

25 PROLICHT COLORS



DISQ ROUND & SQUARE

DESCRIPTION	DIMENSION mm		CCT		LUMEN MAX.	WATT	CRI	ARTN°
DISQ METAL ROUND	Ø 206	2700		•	400	5.1	90	7-02153-02
DISQ METAL SQUARE	216 x 216	2700			400	5.1	90	7-02155-02



SNOOKER

SNOOKER SHINE





CAN-HAVE ACCESSORY: SHINE RING

WHITE YELLOW ORANGE RED BLUE GREEN











COLOR TEMPERATURE CCT

3000 K



BEAMWIDTH

MEDIUM 32° up to VERY WIDE FLOOD 58°





SNOOKER

25 PROLICHT COLORS

SNOOKER

DESCRIPTION	DIMENSION mm		ССТ	LUMEN MAX.	WATT	CRI	ARTN°
SNOOKER	Ø 72	2700 3	3500 4000	352	6.5	90	7-02232-02



COLOR TEMPERATURE CCT 3000 K



DIRECT



MAGIQ MICRO

DESCRIPTION	DIMENSION mm	CCT	LUMEN MAX.	WATT	CRI	ARTN°
MAGIQ MICRO	L: 300	2700 3000	365	5.5	90	7-02400-02

COLOR TEMPERATURE CCT

00 K	3000 K



MICROLINE

DESCRIPTION	DIMENSION mm	CCT	LUMEN MAX./M	WATT/M	CRI	ARTN°
MICROLINE	L: 674 (508+166)	2700 3000 •	386	8	90	7-02401-02
	L: 1174 (1008+166)	2700 3000 •	772	15.8	90	7-02402-02
	L: 1674 (1508+166)	2700 3000 •	1158	24	90	7-02403-02


COMPONENTS

ARTICLE	DESCRIPTION	COLOR	ARTN°
	TRACK POWDER COATED 1000 mm	1-29	350-1885
	TRACK POWDER COATED 2000 mm	1-29	350-1886
	TRACK POWDER COATED 3000 mm	1-29	350-1887
9	TRACKMASK 5 m	BLACK	350-1896
Lb	MOUNTING SCREWS Set 50 pieces		800-1427
2	X-CONNECTOR	1-29	350-1994
>	T-CONNECTOR	1-29	350-1995
\	LINEAR CONNECTOR	BLACK	350-1868
>	FLAT CORNER CONNECTOR	BLACK	350-1869
7	DIHEDRAL CONNECTOR	BLACK	350-1870
_	FLEXIBLE CONNECTOR	BLACK	350-1871

	DESCRIPTION	COLOR	ARTN°
	CURVED TRACK Ø 1600 mm 45°	1-29	350-1894
	CURVED TRACK Ø 1600 mm 90°	1-29	350-1895
1	CURVED TRACK Ø 1600 mm 180°	1-29	350-1904
>	CURVED CONNECTOR Ø 400 mm 90°	1-29	350-1892
>	CURVED CONNECTOR Ø 800 mm 45°	1-29	350-1893
	ENDCAP	BLACK	350-1872
	90° FLAT DUMMY TRACK QUICK INSTALLATION	BLACK	350-1876
	90° DIHEDRAL DUMMY TRACK QUICK INSTALLATION	BLACK	350-1877
	PLUG-CONNECTOR 2/4 m	1-29	800-1428
	PLUG-CONNECTOR 10 m	1-29	800-1429
	PLUG-CONNECTOR OVER TABLE INCL. CABLE ROLLER 1.1 m	1-29	800-1434


ARTICLE	DESCRIPTION	WATT	COLOR	ARTN°
000	WALL/CEILING CABLE LOOP		1-29	350-2060
0	WALL/CEILING CABLE ROLLER		1-29	350-2061
10	TRACK CABLE LOOP		1-29	350-2062
3	TRACK CABLE ROLLER		1-29	350-2063
	SUSPENDED ROLLER		1-29	350-2064
	FEED UNIT END + 2.5 m SUPPLY CABLE		BLACK	350-1866
	FEED UNIT CENTRAL + 2.5 m SUPPLY CABLE		BLACK	350-1867
	DRIVER BOX ENDINSTALLATION ON / OFF 240 x 75 x 35 mm	96	1-29	350-1873
	DRIVER BOX ENDINSTALLATION DALI 240 x 120 x 35 mm	86	1-29	350-1996
	DRIVER BOX ENDINSTALLATION PUSH DIM 240 x 120 x 35 mm	92	1-29	350-1898
	DRIVER BOX ENDINSTALLATION CASAMBI 240 x 120 x 35 mm	86	1-29	350-1899
	DRIVER BOX CENTRAL INSTALLATION ON / OFF 240 x 75 x 35 mm	96	1-29	350-1874


ARTICLE	DESCRIPTION	WATT	COLOR	ARTN°
	DRIVER BOX CENTRAL INSTALLATION DALI 240 x 120 x 35 mm	86	1-29	350-1997
	DRIVER BOX CENTRAL INSTALLATION PUSH DIM 240 x 120 x 35 mm	92	1-29	350-1900
	DRIVER BOX CENTRAL INSTALLATION CASAMBI 240 x 120 x 35 mm	86	1-29	350-1901
	POWER SUPPLY 48 V	90		350-1875
	REMOTE SET PUSH DIM	92		350-1905
	REMOTE SET CASAMBI	86		350-1906
	REMOTE SET DALI	86		350-1998
	POWER SUPPLY 48 V	320		350-2065
	REMOTE SET PUSH DIM	315		350-2066
	REMOTE SET CASAMBI	310		350-2067
	REMOTE SET DALI	310		350-2068

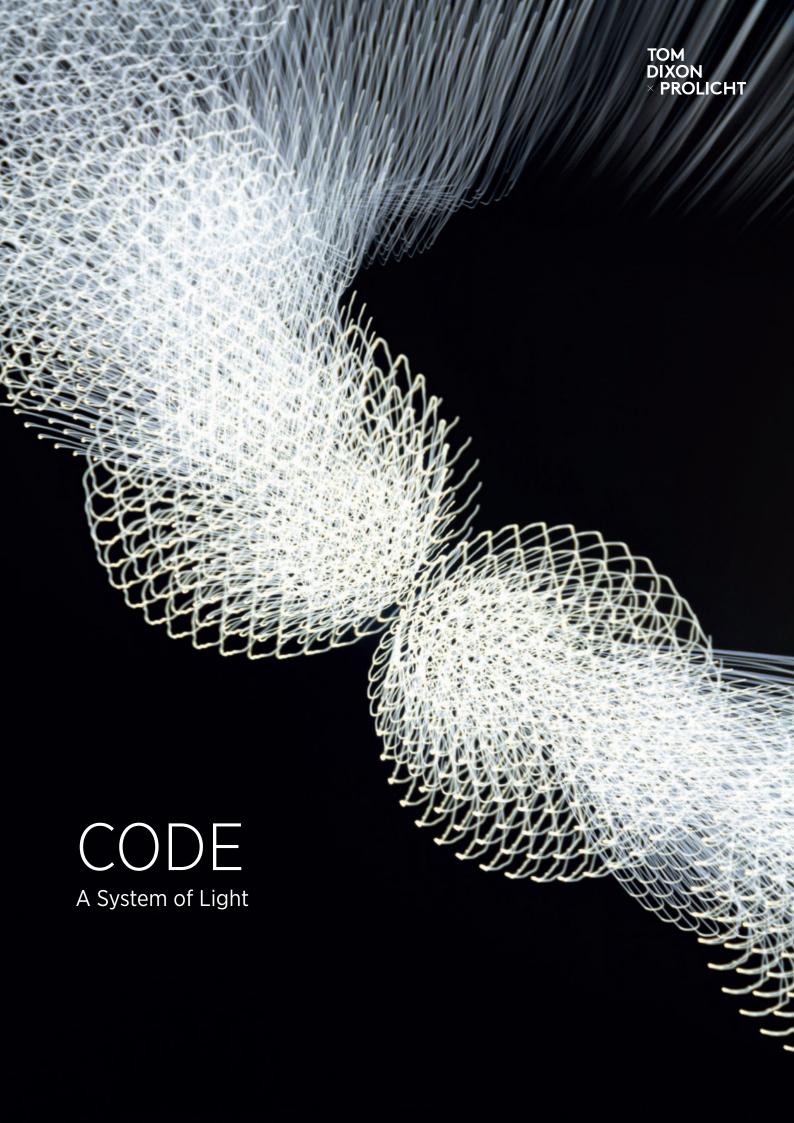







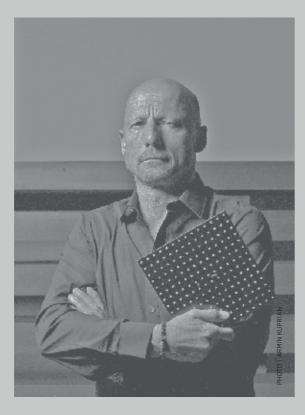

Walter Norz, CEO PROLICHT


DESIGN & TECHNOLOGY

"For the past year, we've been obsessed with printed circuit boards (PCBs). So flat, so efficient, and so very luminous! Our collaboration with PRO-LICHT started high in the mountains of Innsbruck where we shared our first thoughts on a Minimal Track System that would attempt to remove the superfluous and reveal the light engine in all its naked glory."

"It was amazing how quickly the connection with Tom and his team started. From our very first meeting, the sparkle of creativity was there, and we all immediately felt an urge to start some-thing together. Our first joint adventure, CODE, represents the epitome of our collaboration: something neither of us could have done without the other. Two different backgrounds and complementary skills merging to create the perfect product."

Tom Dixon Walter Norz



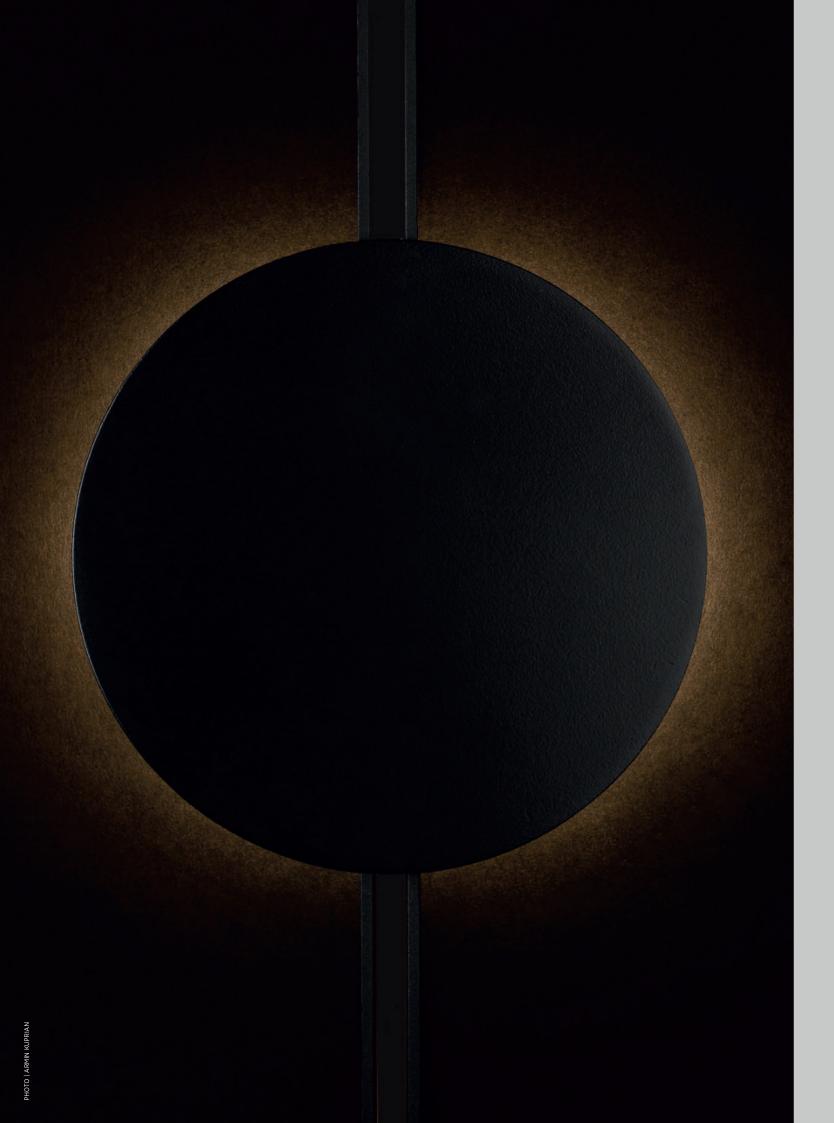

CODE represents the perfect synthesis of our cooperation with Tom Dixon: a product that merges technological expertise with a unique design vision, an innovation that could only be created together. CODE works with the MINIMAL TRACK system, the smallest track solution possible that offers individual control of each luminaire, enabling total flexibility of a space.

The CODE family is composed of two LED light sources: DOT and GRID. The elementary shapes of round and square form the basis of a kit of parts, building blocks to configure infinite arrangements, from the simplest graphic shape to the most exuberant lighting sculpture.

Run at full power, these arrays deliver raw, unfiltered light. Dimmed down, the boards act as decorative elements: graphic patterns of light, which pop out and appear to float against black backgrounds. Each board is naked: stripped of diffusers, lenses and secondary optics. A circuit, which has been inflated, exaggerated and magnified, is exposed, revealing the direction of power from the track through technical componentry and onto the LED.



ISPIRATION | BR

CODE FAMILY | OVERVIEW


DOT DIRECT 4.1W - up to 450lm 2700K






O2 GRID DIRECT 4.3W - up to 460lm 2700K





DOT INDIRECT 4.7W - up to 400lm 2700K







GRID INDIRECT 4.7W - up to 400lm 2700K







DOT STANDING 4.1W - up to 450lm 2700K





O5 GRID STANDING 4.3W - up to 460lm 2700K






DOT POWER
DALI | PUSH DIM | CASAMBI
for max. 96W

OB
GRID POWER
DALI | PUSH DIM | CASAMBI
for max. 96W






CODE DOT

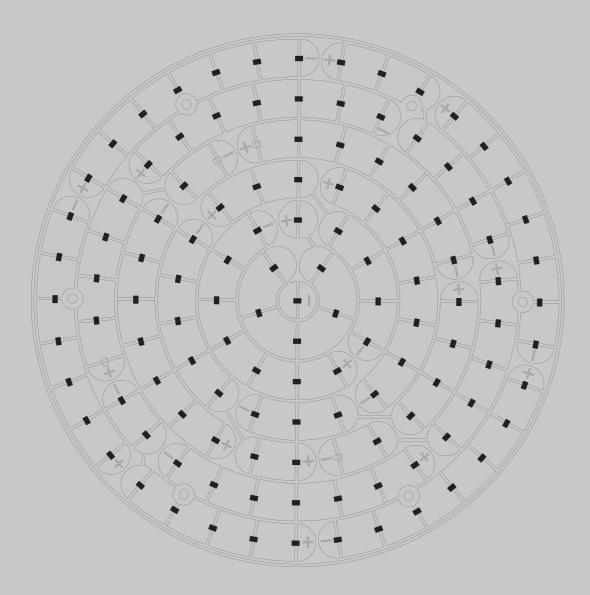







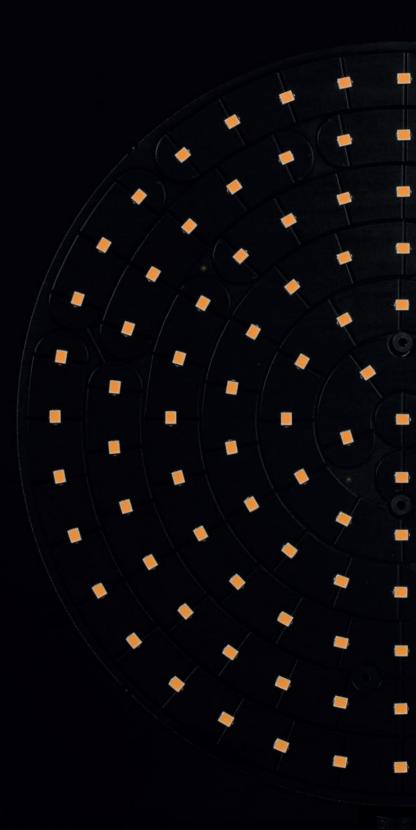







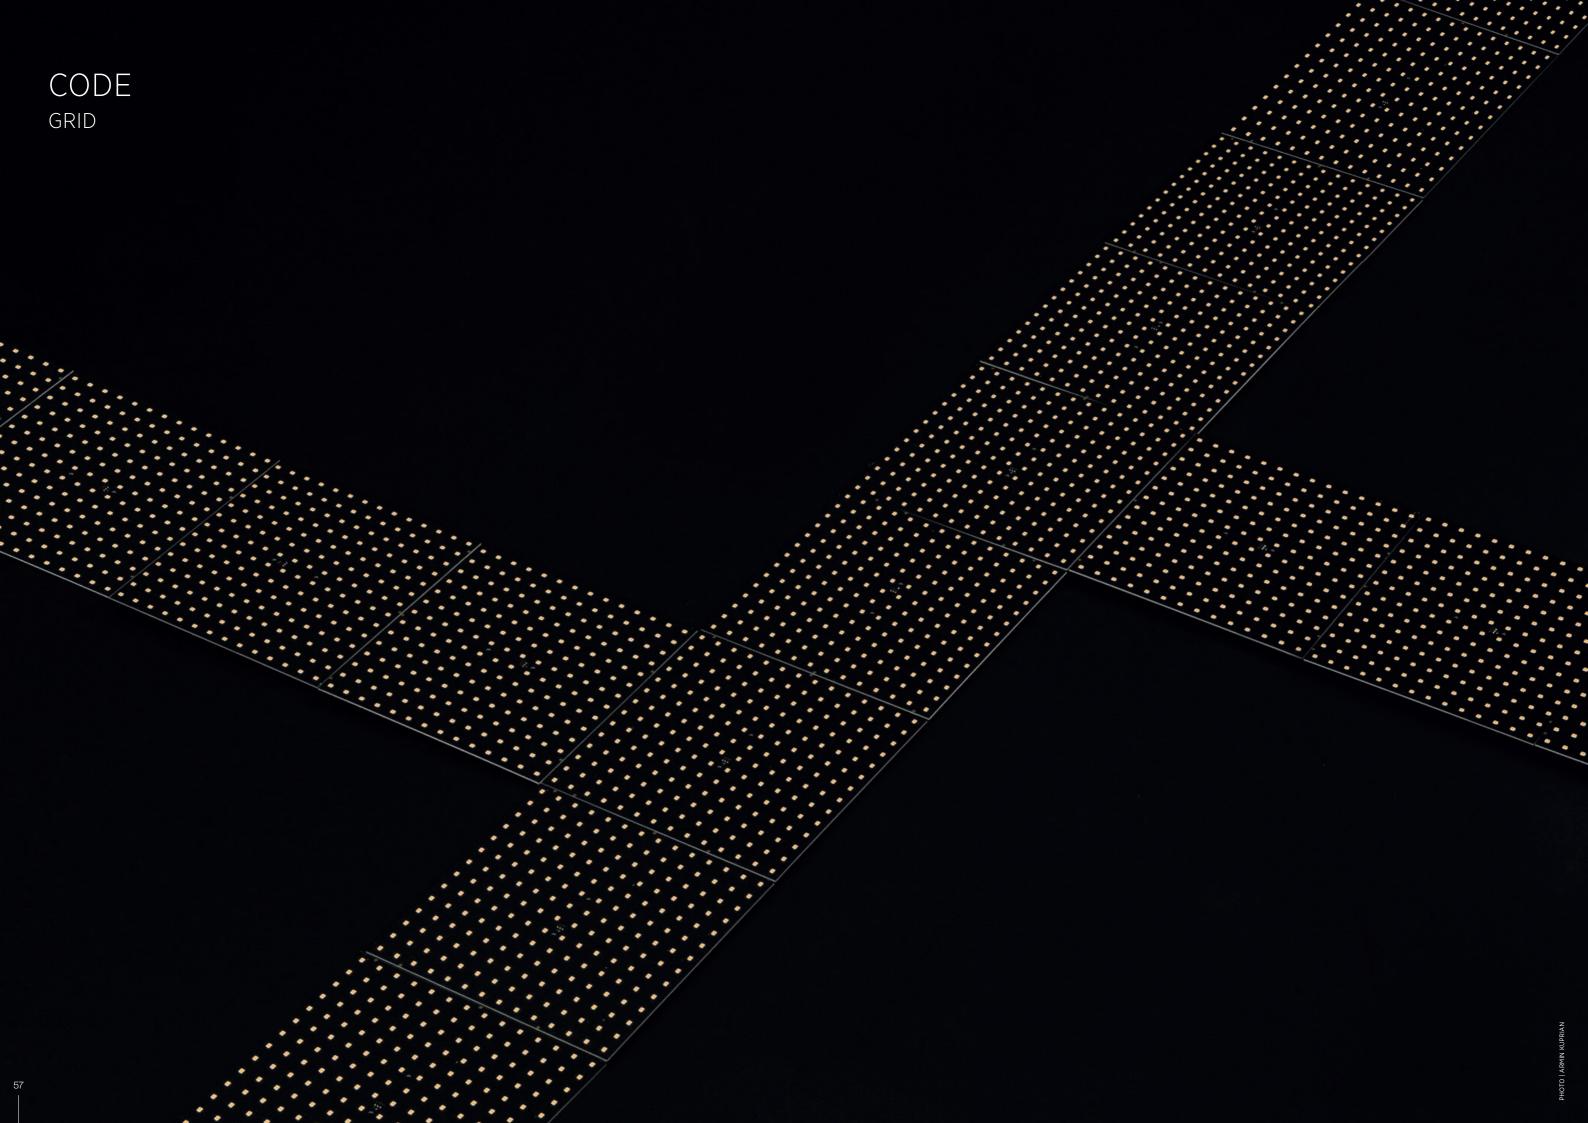

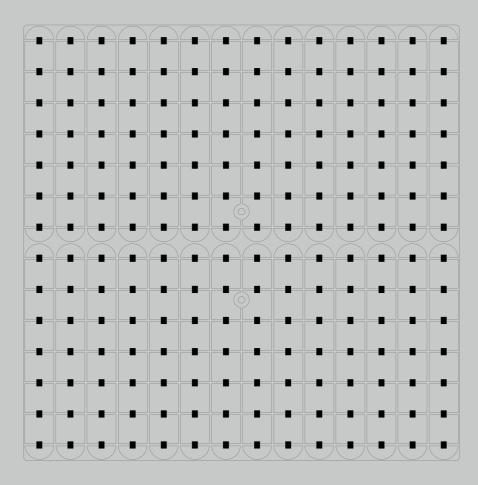

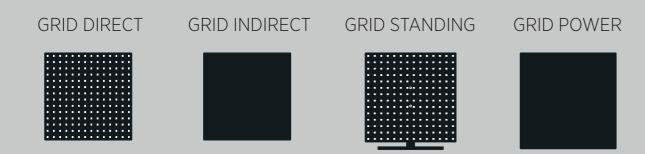


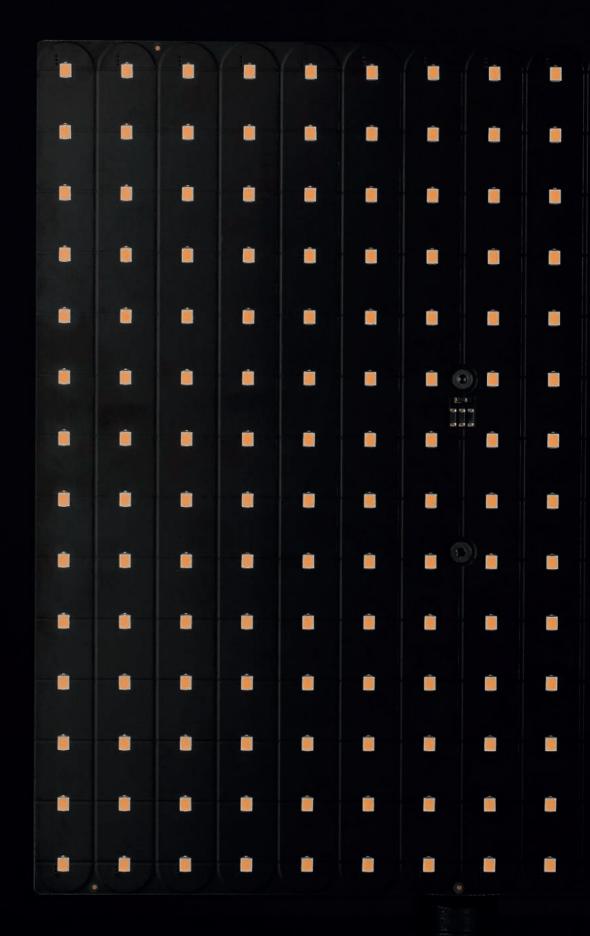







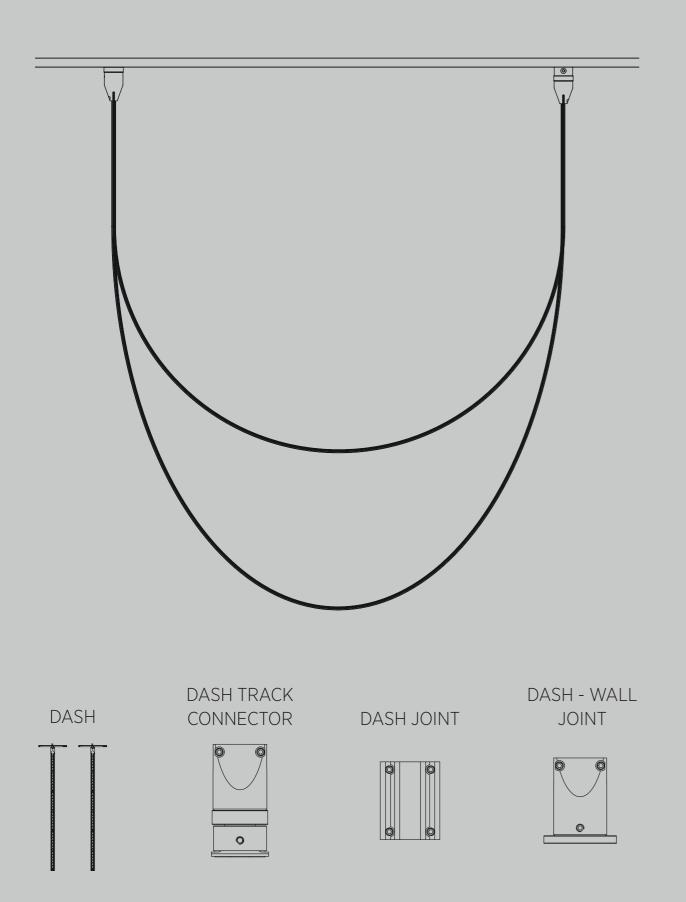












DRAW WITH THE MINIMAL TRACK

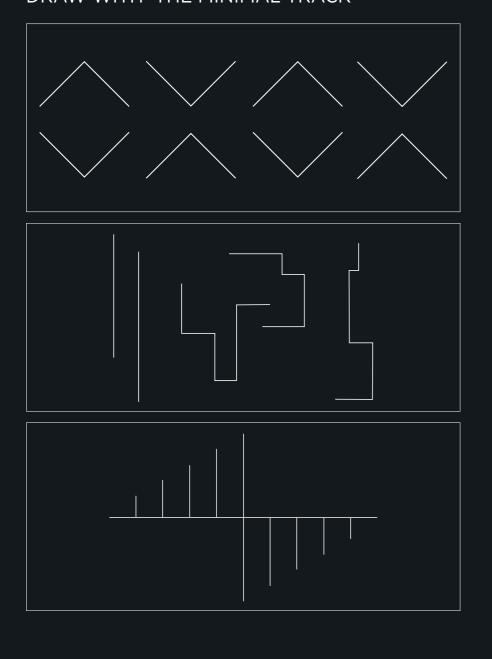

DEFINE YOUR POWER REQUIREMENTS

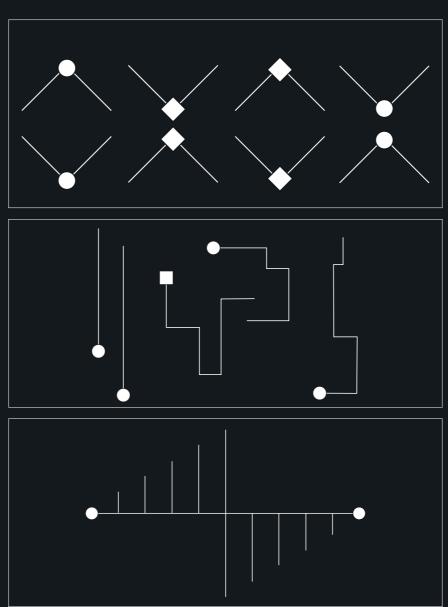

DESIGN YOUR CODE SYSTEM

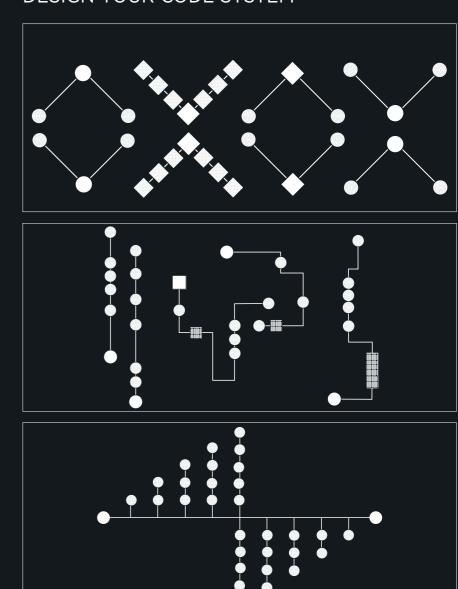

LIGHT

DOT DIRECT

DOT DIRECT 200 48V	7-02108-02	ø 200 H: 13mm	2700K	450lm	DALI	4.2W	BLACK
DOT STANDING 200 48V	7-02109-02	ø 200 H: 220mm	2700K	450lm	DALI	4.2W	BLACK

DOT INDIRECT

	DOT INDIRECT 200 48V	7-02110-02	ø200 H: 13mm	2700K	400lm	DALI	5.1W	BLACK	
--	-------------------------	------------	--------------	-------	-------	------	------	-------	--

GRID DIRECT

GRID DIRECT 200 48V	7-02111-02	210x210 H:13mm	2700K	460lm	DALL	4.2W	BLACK
GRID STANDING 200 48V	7-02112-02	210x210 H: 230mm	27006	4601111	DALI	4.2 VV	BLACK

GRID INDIRECT

	GRID INDIRECT 200 48V	7-02113-02	210x210 H:13mm	2700K	400lm	DALI	5.1W	BLACK	
--	--------------------------	------------	----------------	-------	-------	------	------	-------	--

DASH

DASH	7-02122-02	2.1m	2700K	530lm	DALI	5W	BLACK
DASII	7-02123-02	4.2m	2700K	1060lm	DALI	10W	BLACK
DASH-TRACK CONNCETOR	350-2050						BLACK
DASH-DASH JOINT	350-2051						BLACK
DASH-WALL JOINT	350-2052						BLACK

IMAGINE MICRO

-	IMAGINE MICRO 20	7-02118-02	ø23 H: 71mm	2700K 3000K 4000K	236lm	DALI	3,7W	☐ OPTION SPOT MEDIUM	BLACK
	IMAGINE MICRO 35	7-02119-02	ø35 H: 95mm	2700K 3000K 4000K	669lm	DALI	8,6W	☐ OPTION SPOT MEDIUM	BLACK

MINIMAL TRACK

_			1000x19 H: 10mm	
	TRACK	350-1886-02	2000x19 H: 10mm	BLA
		350-1887-02	3000x19 H: 10mm	
	TRACKMASK	350-1896	5000mm	BLA

CONNECTORS TRACK

COININE	CIONSI	11/1011		
>	T-CONNECTOR	350-1995-02	160x89 H: 10mm	BLACK
~	X-CONNECTOR	350-1994-02	160x160 H: 10mm	BLACK
_	LINEAR CONNECTOR	350-1868	115x11 H: 7mm	BLACK
>	FLAT CORNER CONNECTOR	350-1869	85x85 H: 7mm	BLACK
7	DIHEDRAL CORNER CONNECTOR	350-1870	88x11 H: 88mm	BLACK
	90° DIHEDRAL DUMMY TRACK QUICK INSTALLATION	350-1876	24x24 H: 10mm	BLACK
	90° DIHERAL DUMMY TRACK QUICK INSTALLATION	350-1877	22x22 H: 20mm	BLACK
	ENDCAP	350-1872	8x19 H: 10mm	BLACK

CODE POWER

DOT POWER

		350-1910-02		PUSH DIM	MAX. 92W	
	DOT POWER ENDFEED	350-1912-02	ø 225 H: 38mm	DALI	MAX. 86W	BLACK
		350-1913-02		CASAMBI	MAX. 86W	
		350-1920-02		PUSH DIM	MAX. 92W	
	DOT POWER MIDDLEFEED	350-1922-02	ø 225 H: 38mm	DALI	MAX. 86W	BLACK
		350-1923-02		CASAMBI	MAX. 86W	
		350-1940-02		PUSH DIM	MAX. 92W	
	DOT POWER L	350-1942-02	ø225 H: 38mm	DALI	MAX. 86W	BLACK
		350-1943-02		CASAMBI	MAX. 86W	
		350-1950-02		PUSH DIM	MAX. 92W	
	DOT POWER T	350-1952-02	ø 225 H: 38mm	DALI	MAX. 86W	BLACK
		350-1953-02		CASAMBI	MAX. 86W	
_		350-1930-02		PUSH DIM	MAX. 92W	
	DOT POWER X	350-1932-02	ø 225 H: 38mm	DALI	MAX. 86W	BLACK
		350-1933-02		CASAMBI	MAX. 86W	
		350-1960-02		PUSH DIM	MAX. 92W	
	DOT POWER STAND ALONE SINGLE	350-1962-02	ø 225 H: 38mm (cable length 0-2m adjustable)	DALI	MAX. 86W	BLACK
	SINULE	350-1963-02	0-ZIII dujustable)	CASAMBI	MAX. 86W	
_		350-1970-02		PUSH DIM	MAX. 92W	
	DOT POWER STAND ALONE DOUBLE	350-1972-02	ø 225 H: 38mm (cable length 0-2m adjustable)	DALI	MAX. 86W	BLACK
_	DOUBLE	350-1973-02	0-ZIII dujustable)	CASAMBI	MAX. 86W	

GRID POWER

		350-1980-02			PUSH DIM	MAX. 92W	
	GRID POWER ENDFEED	350-1982-02	225x225 H: 38mm		DALI	MAX. 86W	BLACK
		350-1983-02				MAX. 86W	
		350-1990-02			PUSH DIM	MAX. 96W	
	GRID POWER MIDDLEFEED	350-1992-02	225x225 H: 38mm		DALI	MAX. 86W	BLACK
		350-1993-02			CASAMBI	MAX. 86W	
		350-2010-02			PUSH DIM	MAX. 92W	
	GRID POWER L	350-2012-02	225x225 H: 38mm		DALI	MAX. 86W	BLACK
		350-2013-02			CASAMBI	MAX. 86W	
		350-2020-02			PUSH DIM	MAX. 92W	
	GRID POWER T	350-2022-02	225x225 H: 38mm		DALI	MAX. 86W	BLACK
		350-2023-02			CASAMBI	MAX. 86W	
		350-2000-02			PUSH DIM	MAX. 92W	
	GRID POWER X	350-2002-02	225x225 H: 38mm		DALI	MAX. 86W	BLACK
		350-2003-02			CASAMBI	MAX. 86W	
	CDID DOWED	350-2030-02	005 005 11 70		PUSH DIM	MAX. 92W	
	GRID POWER STAND ALONE SINGLE	350-2032-02	225x225 H: 38mm (cable length 0-2m adjustable)		DALI	MAX. 86W	BLACK
	SINGLE	350-2033-02	0-2111 aujustable)		CASAMBI	MAX. 86W	
	GRID POWER STAND ALONE DOUBLE	350-2040-02			PUSH DIM	MAX. 92W	
		350-2042-02	(cable length 0-2m adjustable)		DALI	MAX. 86W	BLACK
		350-2043-02	0-ZIII dujustable)		CASAMBI	MAX. 86W	

POWER SUPPLY

	48V POWER SUPPLY	350-1875	FOR REMOTE INSTALLATION	252x28 H: 20mm	-
V	REMOTE SET PUSHDIM	350-1905	FOR REMOTE INSTALLATION	90x44 H: 23mm	-
-	REMOTE SET CASAMBI	350-1906	FOR REMOTE INSTALLATION	164x42 H: 25mm	-
1	REMOTE SET DALI	350-1998	FOR REMOTE INSTALLATION	252x28 H: 20mm	-
	FEED UNIT END	350-1866		108x19 H: 12mm	BLACK
_	FEED UNIT CENTRAL	350-1867		141x11 H: 12mm	BLACK

