


Minimal Track

Architectural











Playful Minimalism

VERSATILE AND ALMOST INVISIBLE


The innovative MINIMAL TRACK lighting system combines pure minimalism with the latest technology. Its ultra-compact design makes the sophisticated technology almost invisible, leaving only elegant lines that integrate perfectly into the interior design.

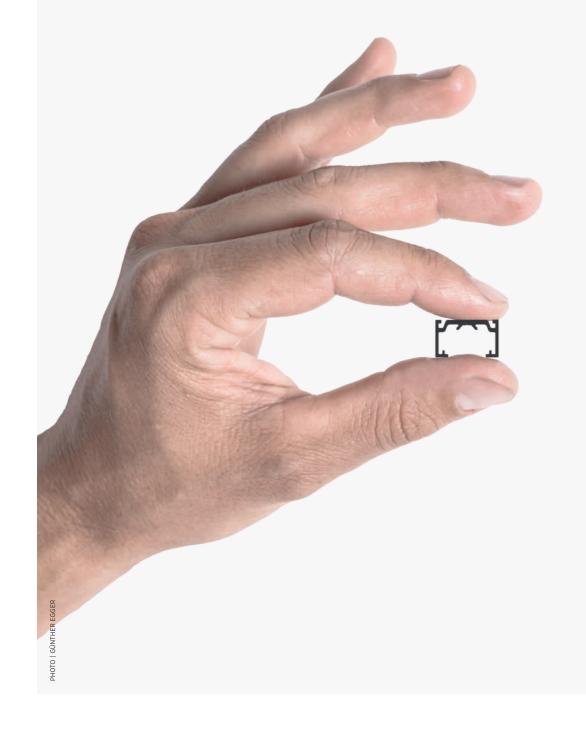

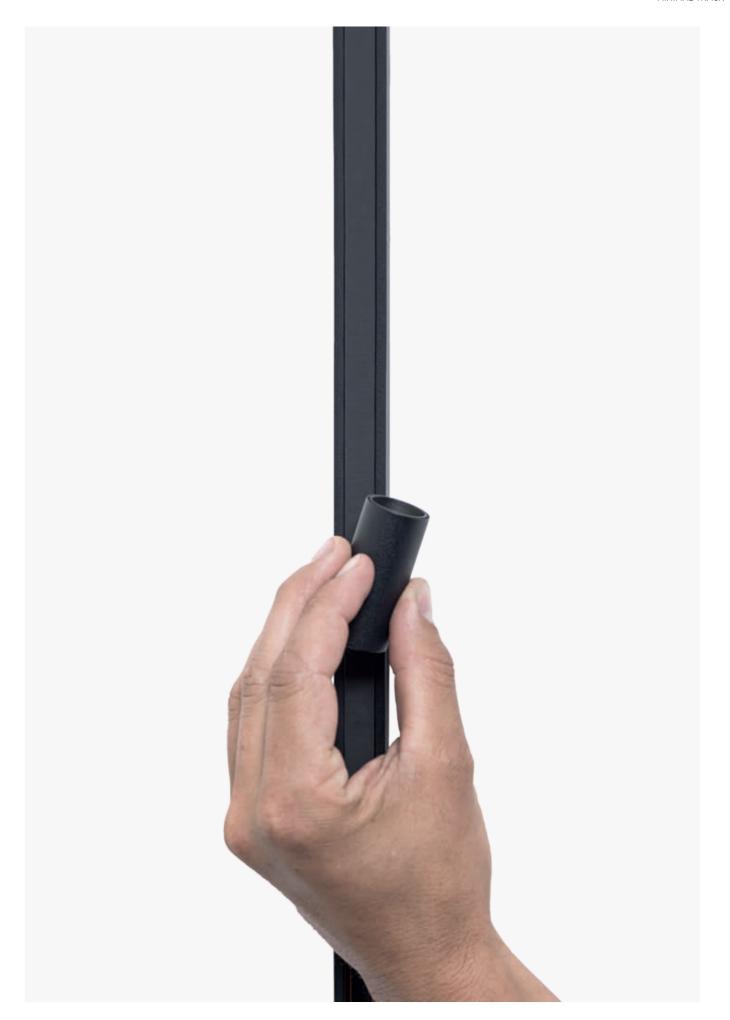





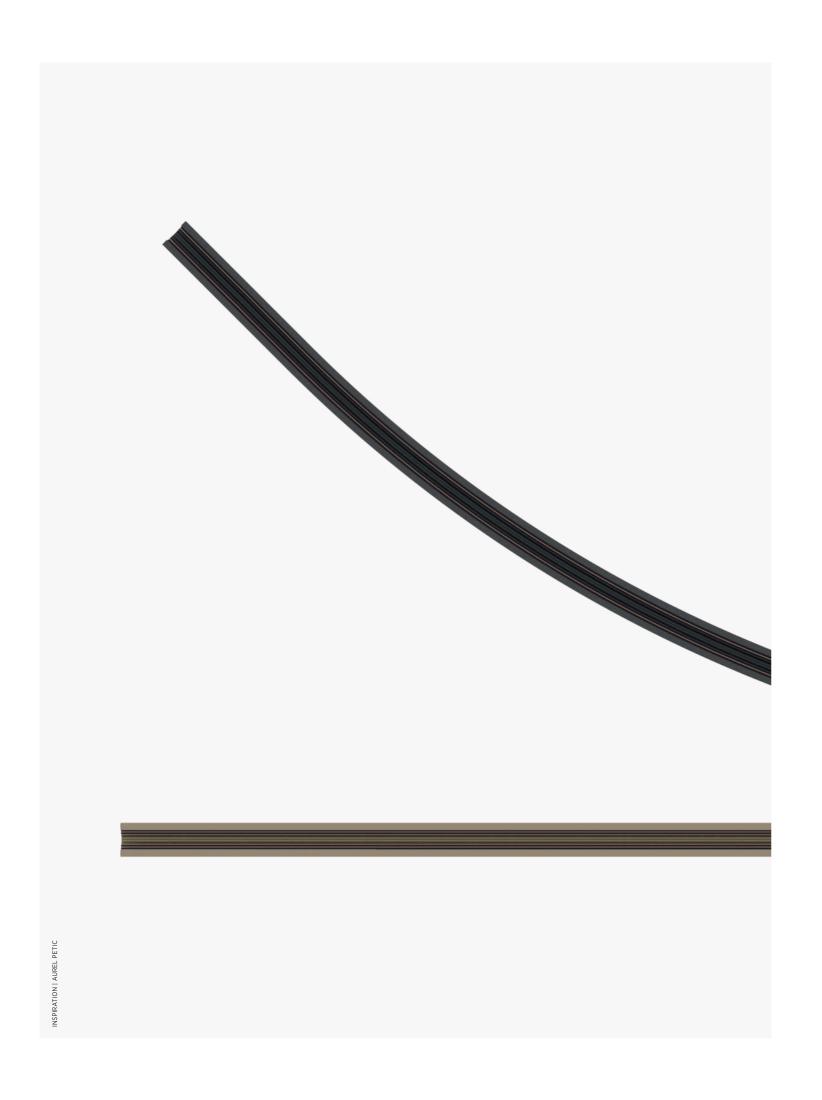

MINIMAL TRACK

MINIMAL ESSENCE

Minimalistic design, minimal installation effort, tailor-made result in the most simple way.

The MINIMAL TRACK allows you to simply design any line you want - available with 90° integrated connectors for elbows on the same surface or to jump ceiling to wall or T- and X-connectors with two different aesthetics to match various tastes in interior design. The track can be easily cut on site to perfectly fulfil any project requirements.



COLOR MAKES A DIFFERENCE

Unique colors and finishes, with infinite combinations, enable a holistic interior design concept to be completed or certain highlights to be created with our 25 PROLICHT colors. RAL Classic or any other special color is available on request.































SCALE 1:1





EASY INTEGRATION


TRACK MOUNTING



TRACK MOUNTING The track is conceived to be easily cut on site, and directly screwed to the ceiling for a tailor-made result in each in-


Article-Number for a set of 50 pieces of mounting screws: 800-1427

CROSSINGS




CROSSINGS Complex connection pieces belong to the past with MINIMAL TRACK. The linear elements can be used to create crossings in the easiest way. Even after the installation, adaptions can be made with minimal effort.

ELECTRICAL CONNECTION




ELECTRICAL CONNECTION Every T-Connector is enclosed with one, every X connector with two flexible cross adapters. An electrical connection of the pieces can be established with these components with ease.

COVERING THE CROSSINGS



COVERING THE CROSSINGS Whether as a colorful accent in the PROLICHT colors or synchronized with the color of the track, the covers are placed as a final step.

INSERTS




INSERTS Place and remove any insert wherever you want by simply pulling it out and snapping it in without any tools needed.

TRACKMASK



TRACKMASK A black flexible rubber cover, easy to cut directly on site after positioning the inserts and integrated inside the track, is the final touch to furtherly minimize the appearance of the MINIMAL TRACK.

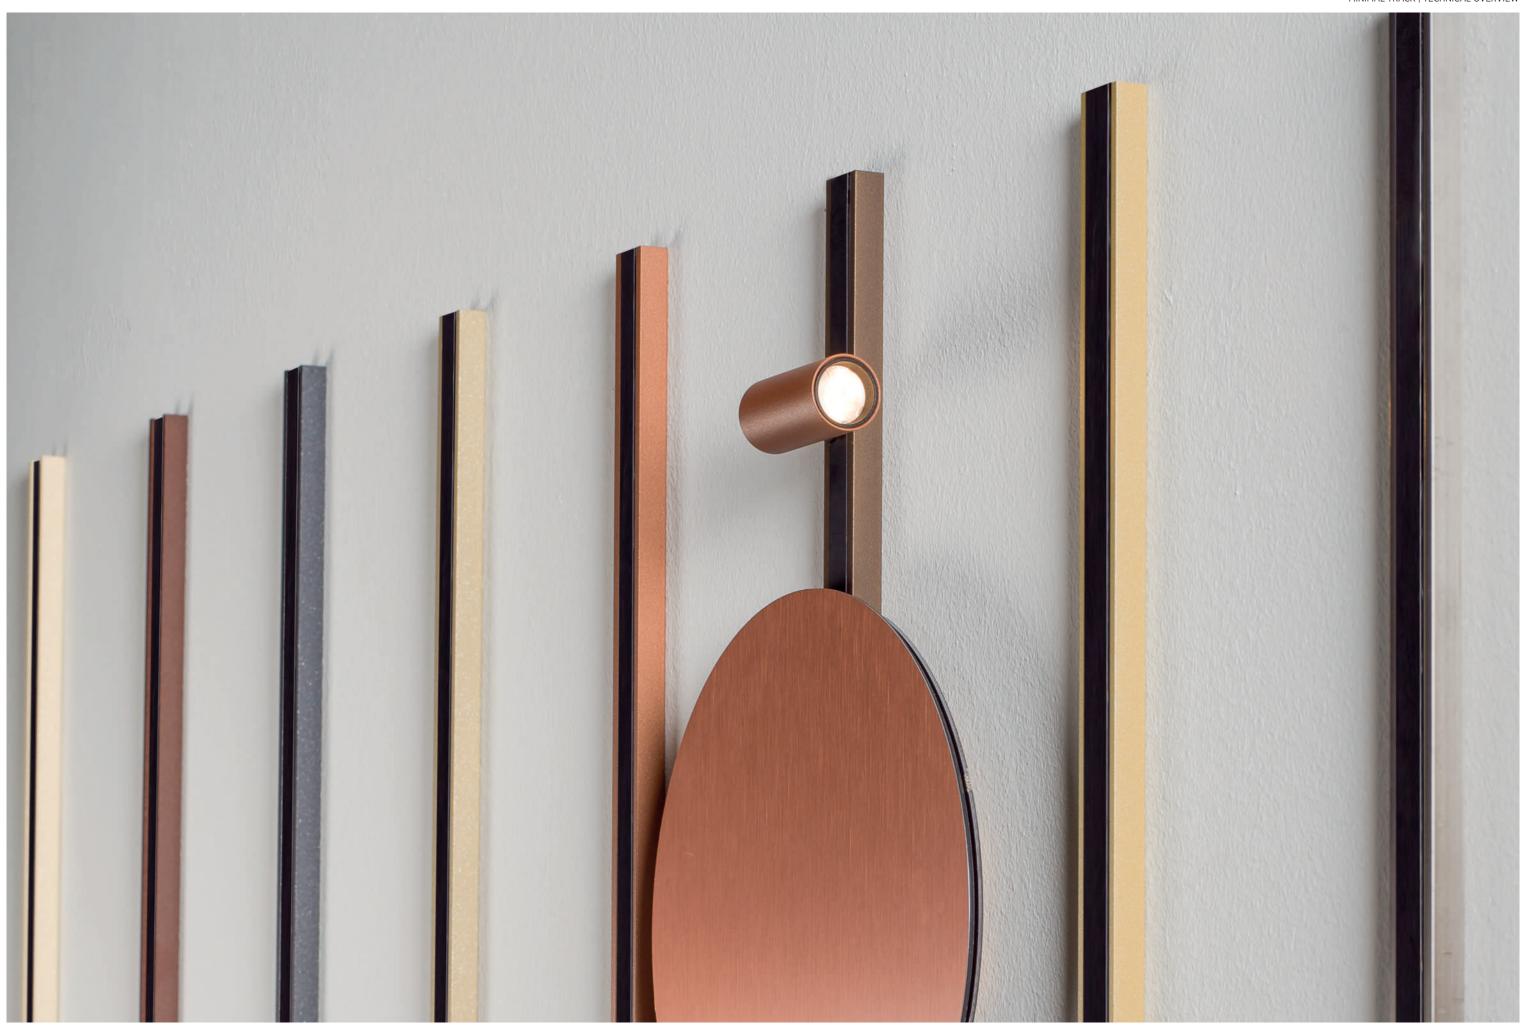

STRAIGHT LINES

LINEAR CONNECTOR

COLOR: BLACK ART.-N°: 350-1868

FLAT CORNER CONNECTOR

COLOR: BLACK ART.-N°: 350-1869

DIHEDRAL CONNECTOR

COLOR: BLACK ART.-N°: 350-1870

90° DUMMY TRACK
QUICK INSTALLATION

COLOR: BLACK ART.-N°: 350-1876

90° DIHEDRAL DUMMY TRACK QUICK INSTALLATION

> COLOR: BLACK ART.-N°: 350-1877

ENDCAP TRACK

COLOR: BLACK ART.-N°: 350-1872

G X-CONNECTOR

AVAILABLE IN 25 PROLICHT COLORS ART.-N°: 350-1994

T-CONNECTOR

AVAILABLE IN 25 PROLICHT COLORS ART.-N°: 350-1995





IMAGINE MICRO | COLOR 02 BLACK VELVET | MICRO LINE



QUICK CONNECTOR

To guarantee a quick and easy installation, we offer additional track components. This black connector is especially suited to facilitate the installation of the MINIMAL TRACK.



Q QUICK CONNECTOR WALL TO CEILING



MITER JOINT

The track is designed to be easily cut on site and for a seamless installation of corner elements it is possible to cut the extremities of straight elements at an angle of 45° for a miter-joint connection. If other angles are needed - for a sloping roof for example - the joint can be individualized with a flexible connector.



B MITER JOINT WALL TO CEILING

YOUR PERFECT CURVE!

The MINIMAL TRACK offers many solutions to compose curved profiles, with 45, 90° and 180° curved connectors. Individualized solutions can be evaluated on request.

All of the curved elements are available in the 25 PROLICHT colors.

CURVED CONNECTOR Ø400MM / 90°

AVAILABLE IN 25 PROLICHT COLORS ART.-N°: 350-1892




CURVED CONNECTOR Ø800MM / 45°

AVAILABLE IN 25 PROLICHT COLORS ART.-N°: 350-1893



CURVED TRACK Ø1600MM / 45°

AVAILABLE IN 25 PROLICHT COLORS ART.-N°: 350-1894



CURVED Ø1600MM / 90°


AVAILABLE IN 25 PROLICHT COLORS ART.-N°: 350-1895



CURVED TRACK Ø1600MM / 180°

AVAILABLE IN 25 PROLICHT COLORS ART.-N°: 350-1904



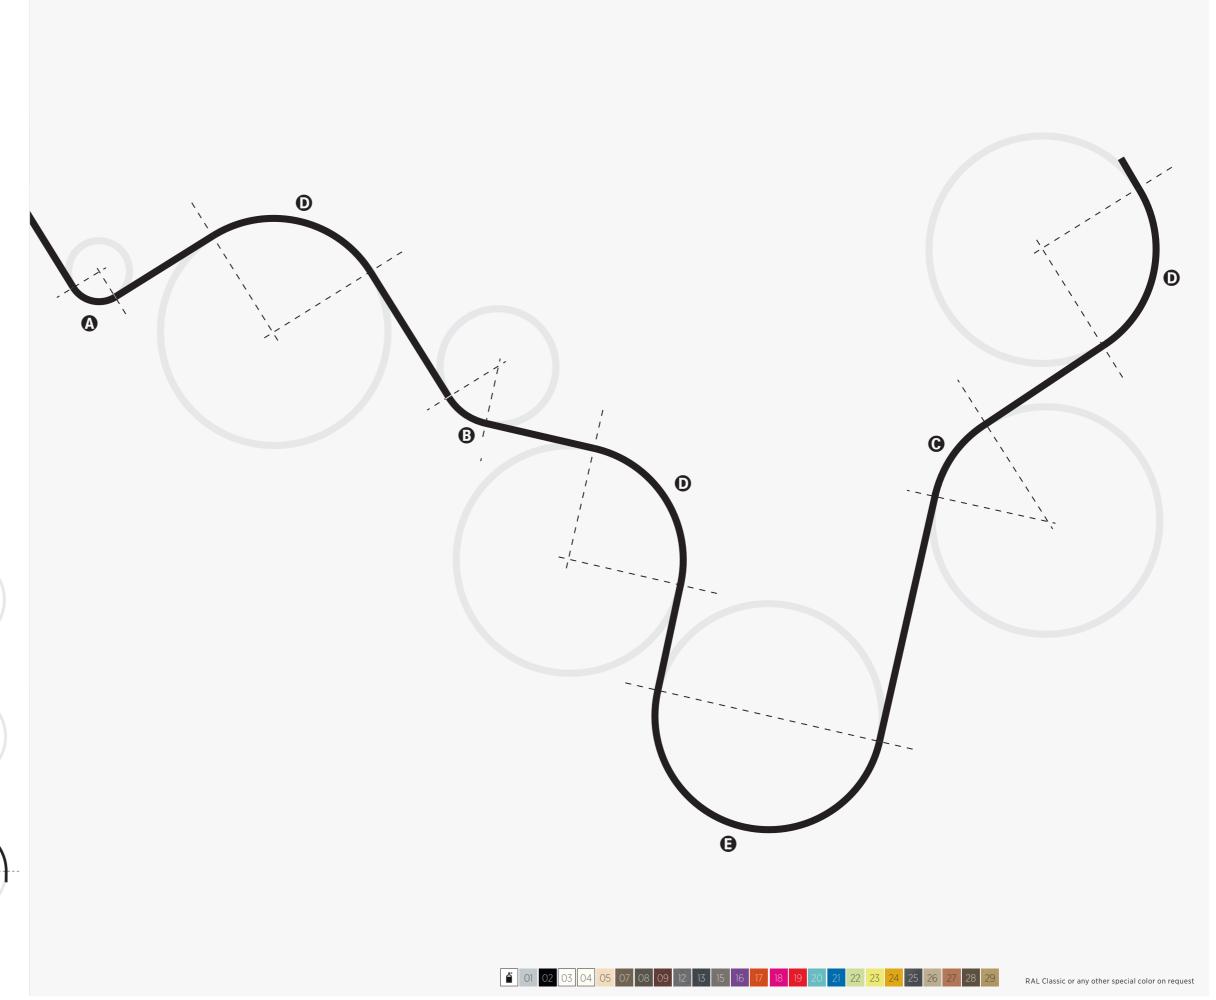






INSERT: SNOOKER SHINE - 02 BLACK VELVET | SHINE RING WHITE

INSERTS



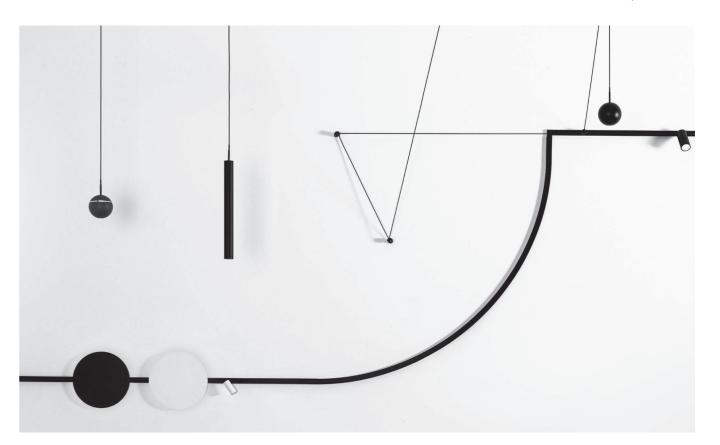



MINIMAL TRACK offers a wide variety of inserts - the selection ranges from pendant luminaires over indirectly illuminated DISQs to decorative elements. The system guarantees exceptional flexibility to adapt the lighting concept to any room situation.

Optional components and colored accessories allow unlimited scope for individualized design concepts. This lighting system is not only suitable for creating the perfect lighting atmosphere, but also adds individuality and exceptionality to any space.

INSERTS OVERVIEW

IMAGINE MICRO 20

AVAILABLE IN 25 PROLICHT COLORS ART.-N°: 7-02120-02



IMAGINE MICRO 35

AVAILABLE IN 25 PROLICHT COLORS ART.-N°: 7-02121-02



MAGIQ MICRO

COLOR: BLACK ART.-N°: 7-02400-02





AVAILABLE IN 25 PROLICHT COLORS ART.-N°: 7-02232-02

SNOOKER METAL

AVAILABLE IN CHROME FINISH ART.-N°: 7-02409-02



HANGOVER

AVAILABLE IN 25 PROLICHT COLORS ART.-N°: 7-02236-02



AVAILABLE IN 25 PROLICHT COLORS ART.-N°: 7-02153-02

DISQ ROUND METAL

AVAILABLE IN 3 FINISHES ART.-N°: 7-02152-02









DISQ SQUARE

AVAILABLE IN 25 PROLICHT COLORS ART.-N°: 7-02155-02

DISQ SQUARE METAL

AVAILABLE IN 3 FINISHES ART.-N°: 7-02154-02














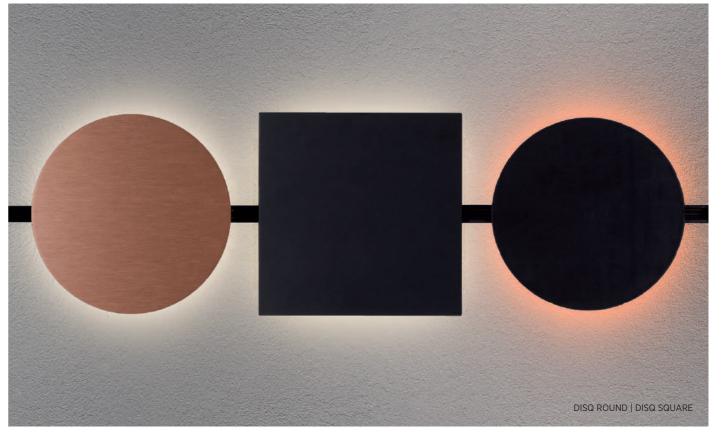



IMAGINE MICRO

The ultra-compact design makes the sophisticated technology almost invisible, leaving only elegant lines that integrate perfectly into the interior design. The IMAGINE MICRO spotlights are available in 25 PROLICHT colors. Special colors can be ordered on request.






IMAGINE MICRO 20 ART.-Nº 7-02120-02

Ø 23mm L: 72 mm

IMAGINE MICRO 35 ART.-Nº 7-02121-02


Ø 35 mm L: 95 mm


	LUMEN MAX.	
	202 lm	
	WATT	
	3.7 W	
	CCT	
2700 K	3000 K	4000 K












YOUR PERFECT FOCUSING For the perfect definition of your light setting, not only each spot can be tilted from 0° to 90° and rotated 355°, but comes also equipped with a tool-less locking system, to fix in position the desired rotation, even when spots are installed in a vertical track but comes also equipped with a tool-less locking system. The spots can be easily fixed in the desired position, even when they are installed in a vertical track.





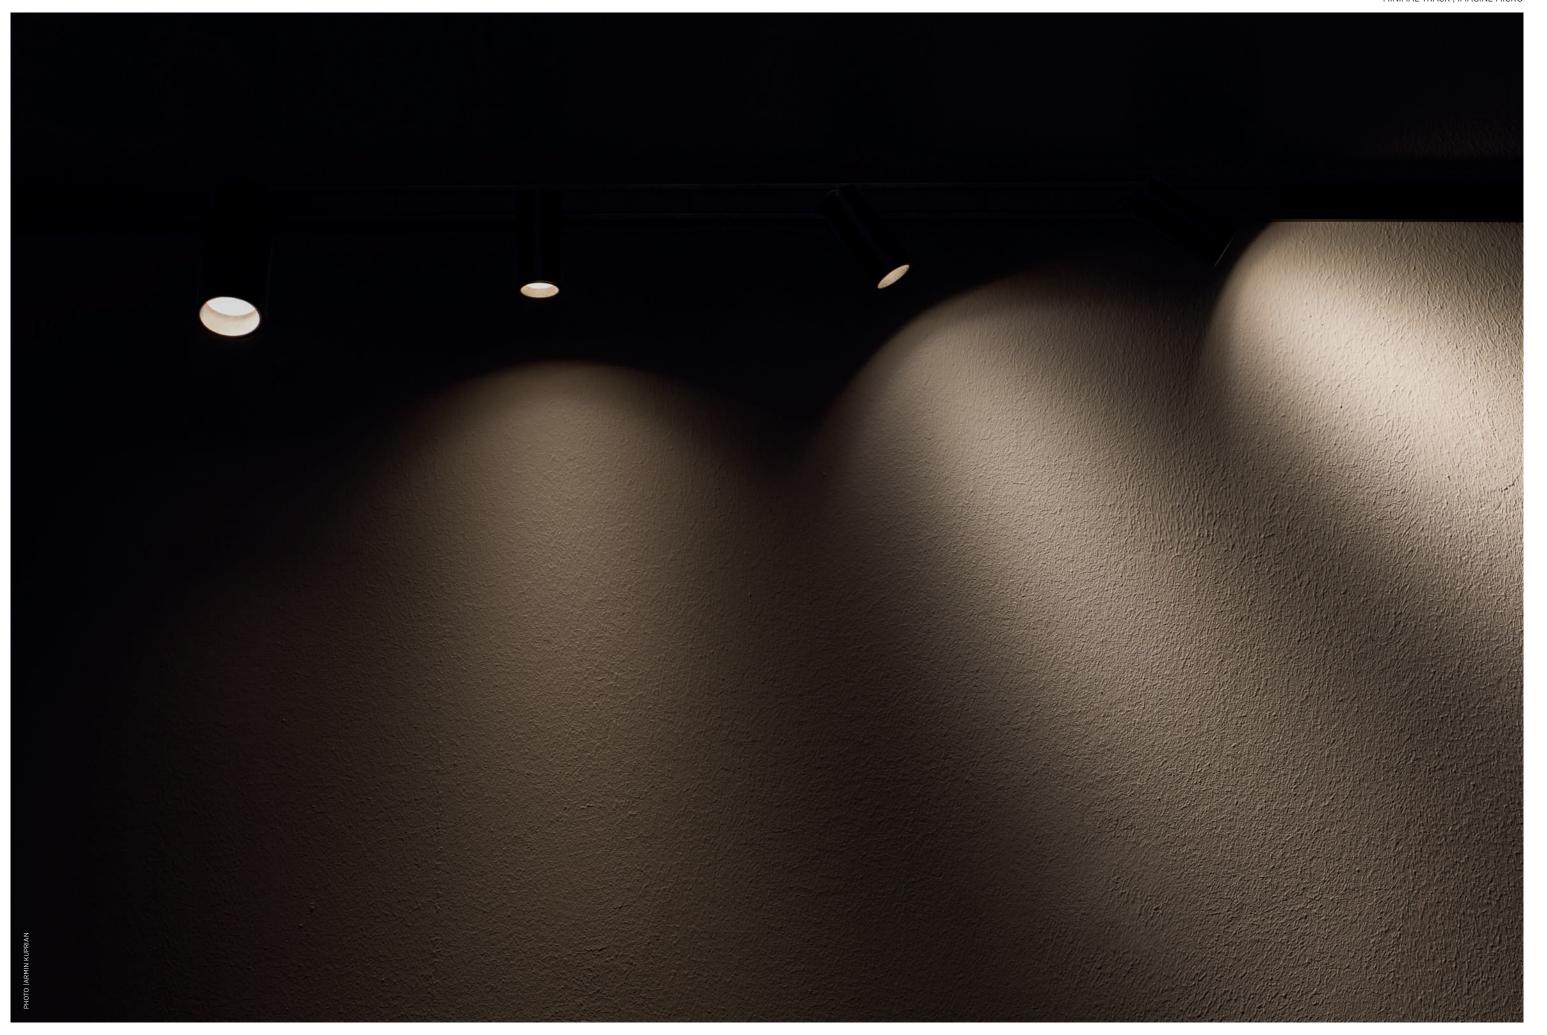



The MAGIQ MICRO is part of the MAGIQ family and works with DALI, CASAMBI or PUSH DIM. The inserts can be lined up to fill the whole track with the MAGIQ inserts while the distance of the single dots stays always the same. This leads to a coherent appearance of the system and uniform illumination.



MAGIQ MICRO ART.-Nº 7-02400-02

L: 300mm x 11 H:7 mm

L	UMEN MAX.	
	429 lm	
	WATT	
	7,3 W	
	CCT	
2700 K		3000 K





MICROLINE

MINIMAL TRACK | MICRO LINE

MICROLINE

The specially developed LED Lines can be controlled individually with DALI, CASAMBI and PUSH DIM. The MICROLINE is an essential part of the range of inserts for the MINIMAL TRACK and offers shadowfree LED lines to be integrated into the architecture. Within the track, the lines are seamlessly installed and keep the appearance of the track as minimalistic as intended.

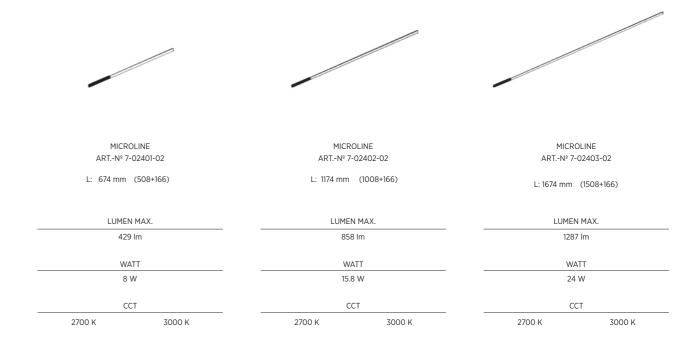

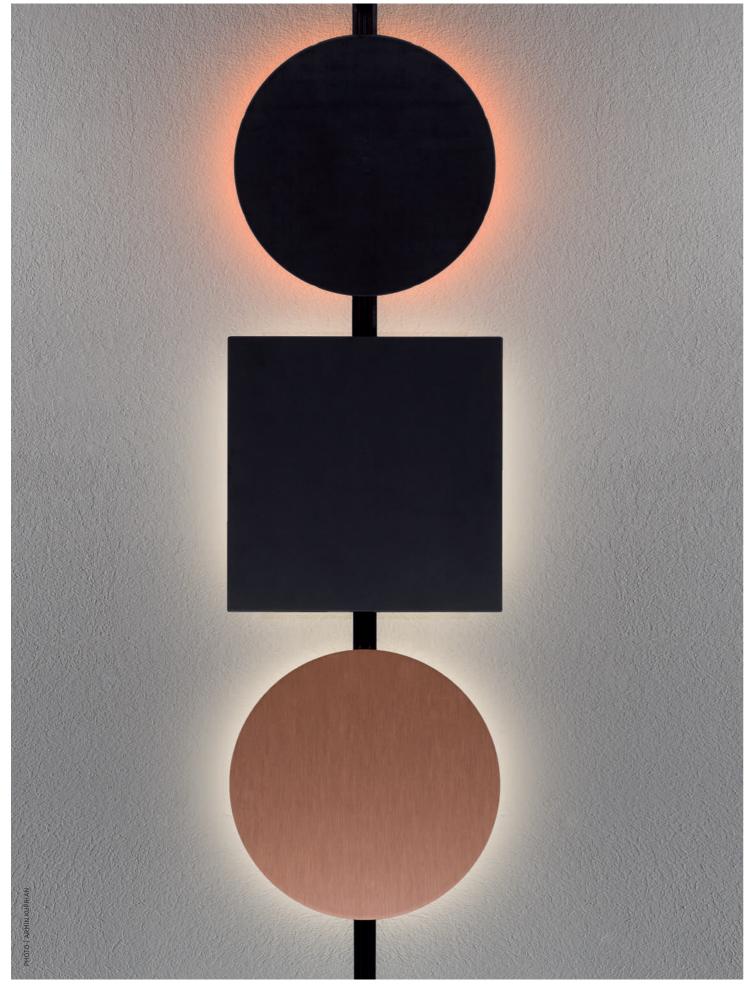

DISQ ROUND and DISQ SQUARE are new inserts for the MINIMAL TRACK, offering refined complements to the family. With its discrete 2700K indirect emission and its DALI DIM functionality, DISQ offers maximum lighting comfort.

The inserts are available in two different versions: with a metal plate, which is available in copper, chrome or a stainless steel finish, and a color version, that can be individualized in our 25 PROLICHT colors.

























YELLOW ORANGE RED BLUE GREEN


YELLOW ORANGE RED BLUE GREEN


CAN HAVE ACCESSORY DISQ SQUARE | AURA COVER

YELLOW ORANGE RED BLUE GREEN

The DISQ ROUND | SQUARE inserts can also be equipped with the AURA COVER accessories: softening the light, highlighting the shape and creating a floating colored effect.





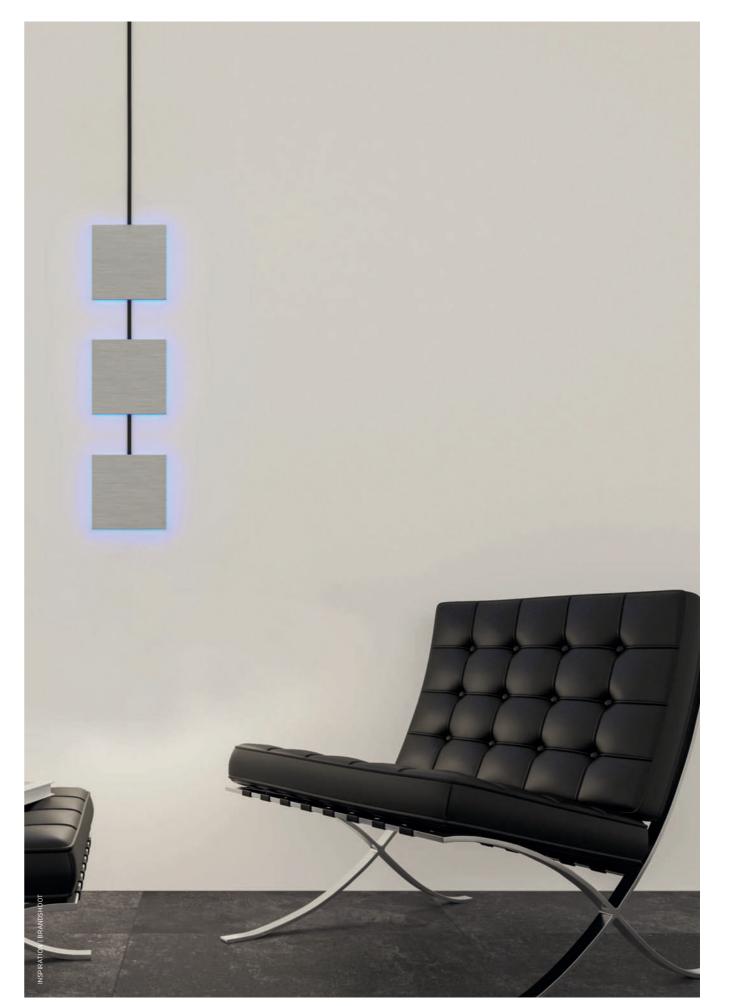


MINIMAL TRACK, COLOR BLACK VELVET | DISQ SQUARE, STAINLESS STEAL | AURA COVER: BLUE





SNOOKER The iconic spherical luminaire SNOOKER is a real eye-catcher on its own or grouped in multiples as a light installation. Configurable in the PROLICHT colors, with an additional KORONA SHINE RING and with adjustable cable lengths, SNOOKER offers plenty of design freedom. The unique MICRO DOT lens provides pure light with optimum glare control.

The integrated lens optics allow beam angles of 32° and 58° while offering a maximum effect with a minimal light emission opening.



SNOOKER ART.-Nº 7-02409-02

Ø 72 mn

	LUMEN MAX.	
	352 lm	
	WATT	
	6.5 W	
	CCT	
2700 K	3000 K	4000 K

BEAMWIDTH





MEDIUM VERY WIE 32° 58

25 PROLICHT COLORS

CAN HAVE ACCESSORY | SHINE RING



















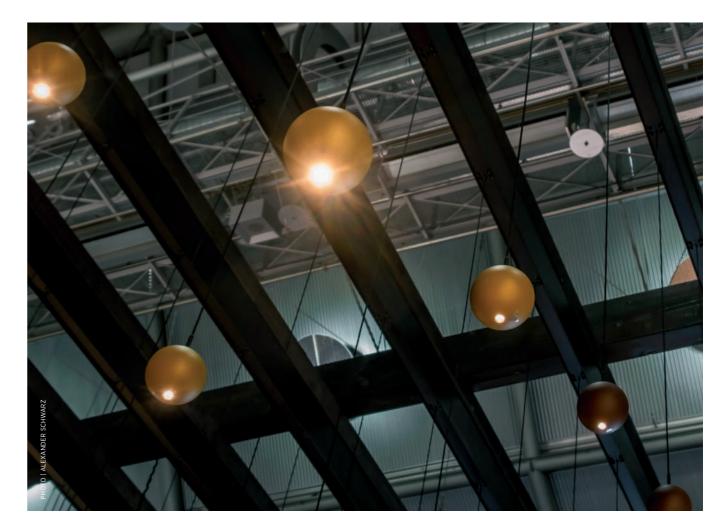

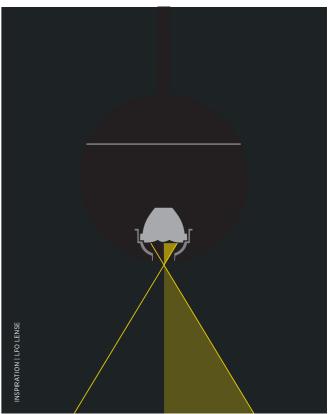


SNOOKER, COLOR 27 COPPER MINE, SHINE RING WHITE | SNOOKER, COLOR 29 JAZZ GOLD






The HANGOVER PLUG suspended spot together with the PLUG EXSTENSIONS allows a manual adjustment of the wire suspension: the spotlights are available with a rope length of 2 or 4 metres and can be manually shortened or lengthened by rolling into the canopy.

An ingenious docking system guarantees quick replacement and quick locking of the various HANGOVER PLUG modules: this way, the lights can be exchanged at will, giving room for a new look over and over again. The docking system is also available for other product families and guarantees that other luminaires can also be easily mounted (SNOOKER | MELT and OPAL by Tom Dixon)

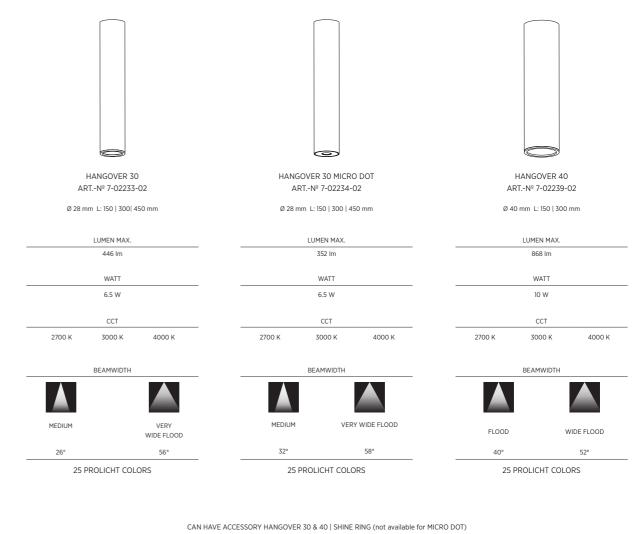



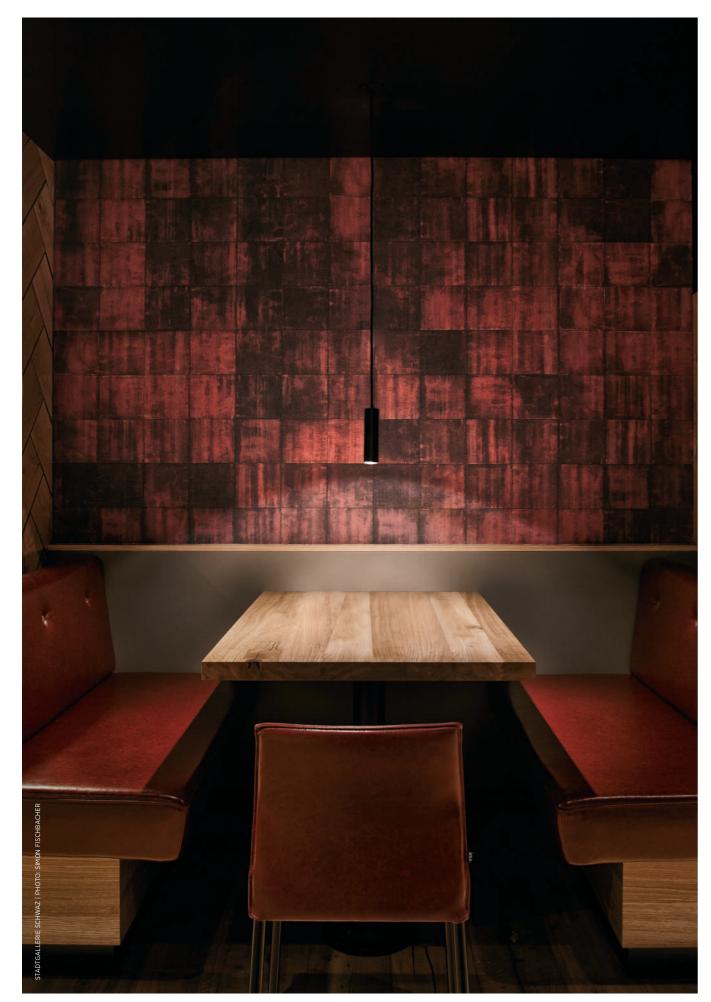

HANGOVER | COLOR 02 BLACK VELVET | CORONA CONE 02 BLACK VELVET





KORONA CONE


The deep reflector directs the light effectively past the cone without changing the light color. The cone can differ colors. KORONA SHINE creates be customized in any of the 25 PRO-LICHT colors.

SHINE RING The luminaire can also be equipped with a luminous ring in one of 6 colorful accents and atmospheric


highlights.

MICRO DOT The integrated lens optics allow beam angles between 24° and 58°. The available variants with MICRO DOT technology offer maximum effects. JUST LIGHT - NO GLARE



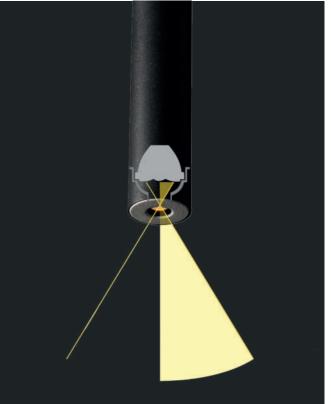



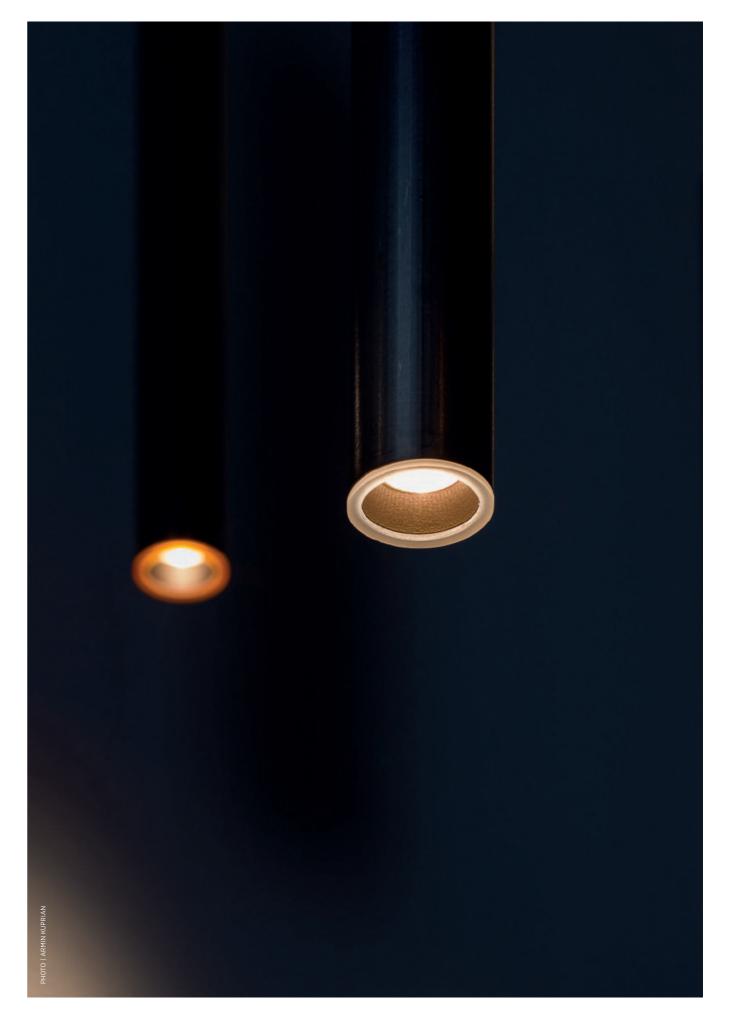




ACCESSORIES FOR PENDANT INSERTS





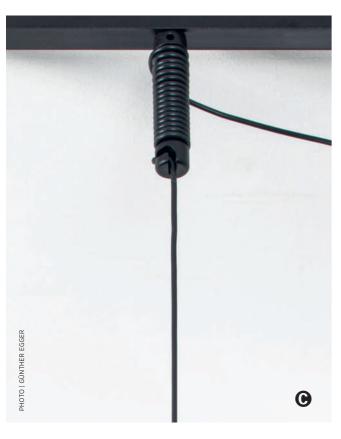

With the optional cable loop components and the various cable roller sizes, an adaptation in length is possible at any time in the simplest way. Individualization in the 25 PROLICHT colors is possible so that the components fit perfectly into the existing room concept.



With the plug connector, SNOOKER and HANGOVER PLUG luminaires can be easily exchanged at any time.











Various cable loops can be used to create patterns that can be placed anywhere in the room and expanded across ceilings and walls. By offering this creative freedom to the designer, cables of pendant lights can be turned into additional design elements. The MINIMAL TRACK system offers you unprecedented freedom to fulfill your wishes/requirements from a functional and a creative perspective.


The main goal of this system is to bring illumination to the places where it is needed - this means that the MINIMAL TRACK liberates the designer from thinking about where the power outlet is and enables a highly individualistic design vision.





Minimalistic design, minimal installation effort, tailor-made result in the most simple way - that's the MINIMAL TRACK system. Now it can be equipped with our well-known SNOOKER and HANGOVER inserts to give you even more possibilities to enrich your design concept.

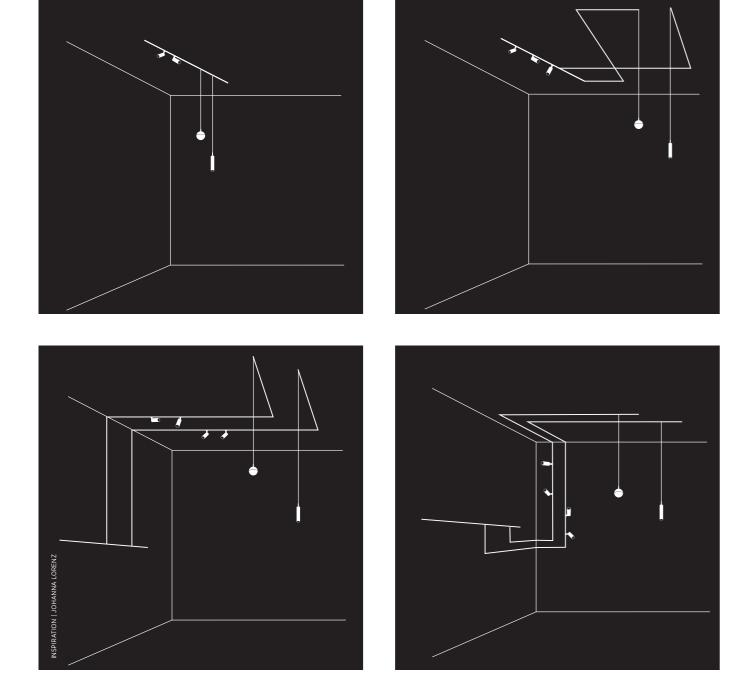

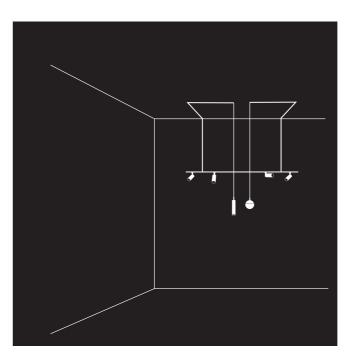

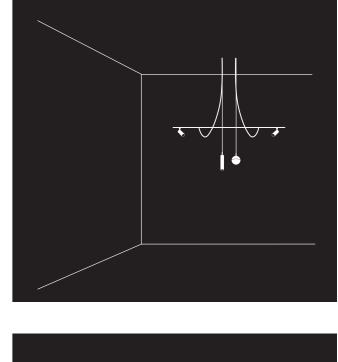










EXACTLY THE LIGHT YOU WANT

Every moment, every day and every situation is different. Up to 64 inserts for the MINIMAL TRACK can be dimmed individually, in groups or together with DALI and CASAMBI. This enables complete control of your lighting atmosphere.

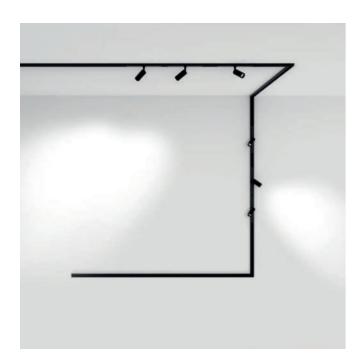








Despite its exceptionally compact size, the MINIMAL TRACK is designed as a DALI track that can be integrated into any lighting control system. It has two conductors dedicated to DALI in order to enable completely individual control of each installed luminaire.

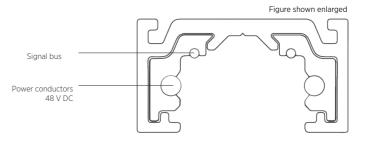

64 ADDRESSES

DALI offers individual control of each sing-le luminaire, with the possibility of managing groups and scenarios.



8 ADDRESSES

The CASAMBI control allows wireless regulation of up to eight groups of fittings, through physical commands or a mobile App.



1 ADDRESS


The PUSH DIM solution offers simple control of all the fittings in the same line that can be easily dimmed with a standard pushbutton.




1 ADDRESS Simply ON / OFF


Simply ON / OFF without any control



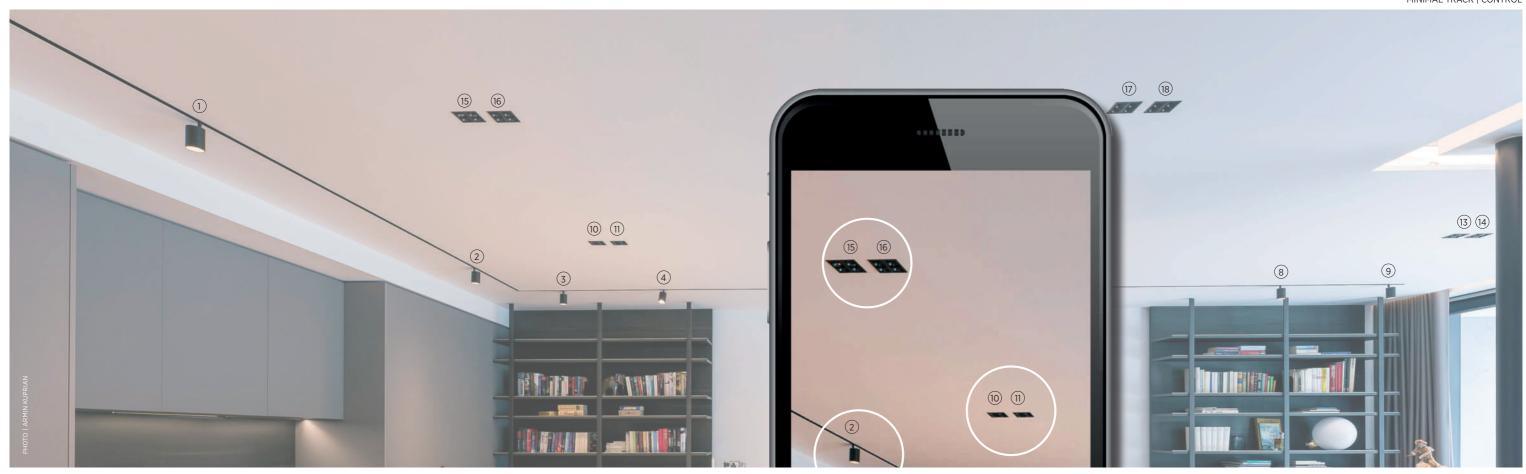

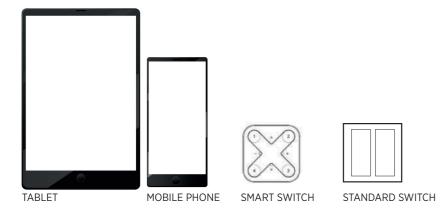



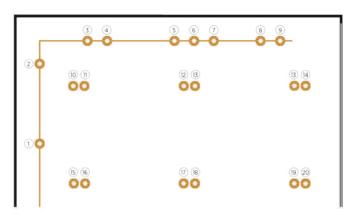

EXACTLY THE CONTROL YOU NEED

PUSH DIM | 1 ADRESS


All of the inserts are dimmed in parallel and the last scene is stored.

CASAMBI | 8 ADRESSES

Up to eight individual spots or groups and scenes can be controlled with CASAMBI.

DALI 2 | 64 ADRESSES

With DALI, 64 inserts can be individually programmed and saved scenes are available to be fetched from the storage. With this control, every room can be individually programmed or integrated into a holistic DALI solution for the whole object. In addition, a smaller housing of the control can be integrated into switch boxes to save space.

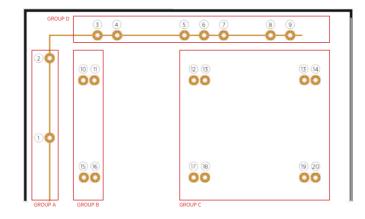

MELLOW YELLOW

COLOR MAKES A DIFFERENCE





28

MINIMAL TRACK

☐ BEAMWIDTH | LEGEND

Super Spot	SS	0° - 10°
Spot	S	10° - 25°
Medium	М	25° - 35°
Flood	F	35° - 45'
Wide Flood	WF	45° - 55'
Very Wide Flood	VWF	55° - 65'



IMAGINE MICRO 20 IMAGINE MICRO 35



COLOR TEMPERATURE CCT



BEAMWIDTH

SPOT 18° up to MEDIUM 26°








IMAGINE MICRO

DESCRIPTION	DIMENSION mm		CCT		LUMEN MAX.	WATT	CRI	ARTN°
IMAGINE MICRO 20	Ø 23 H: 50	2700	3000	4000	236	3.7	90	7-02120-02
IMAGINE MICRO 35	Ø 35 H: 76	2700	3000	4000	669	8.6	90	7-02121-02

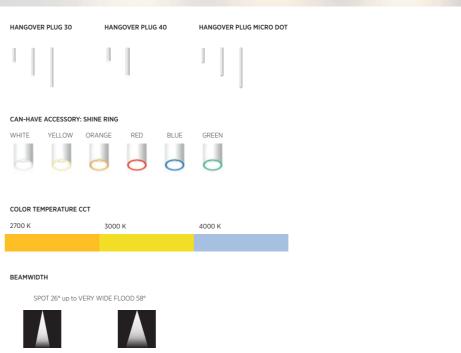


HANGOVER

25 PROLICHT COLORS


DESCRIPTION		DIMENSI	ON mm		ССТ			LUMEN MAX.	WATT	CRI	ARTN° L150	ARTN° L300	ARTN° L450
HANGOVER PLUG	Ø 28 x	L: 150	L: 300	L: 450	2700	3000	4000	446	6.5	90	7-02233-02	7-02235-02	7-02237-02
HANGOVER PLUG	Ø 40 x	L: 150	L: 300		2700	3000	4000	868	9.8	90	7-02239-02	7-02240-02	•
HANGOVER PLUG MICRO	Ø 28 x	L: 150	L: 300	L: 450	2700	3000	4000	352	6.5	90	7-02234-02	7-02236-02	7-02238-02



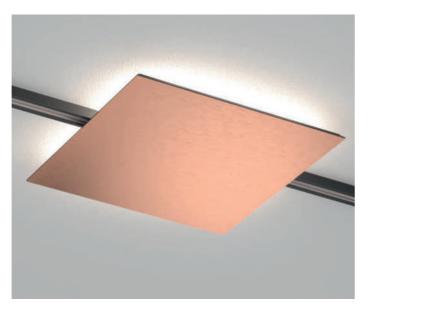







YELLOW ORANGE RED BLUE GREEN













COLOR TEMPERATURE CCT



INDIRECT



DISQ METAL ROUND & SQUARE







DISQ METAL ROUND & SQUARE

DESCRIPTION	DIMENSION mm		CCT		LUMEN MAX.	WATT	CRI	ARTN°
DISQ ROUND METAL	Ø 206	2700	•	•	400	5.1	90	7-02152-02
DISQ SQUARE METAL	216 x 216	2700			400	5.1	90	7-02154-02























COLOR TEMPERATURE CCT

2700 K



BEAMWIDTH

INDIRECT



DISQ ROUND & SQUARE (POWDER COATED)

25 PROLICHT COLORS



DISQ ROUND & SQUARE

DESCRIPTION	DIMENSION mm		CCT		LUMEN MAX.	WATT	CRI	ARTN°
DISQ METAL ROUND	Ø 206	2700	•	•	400	5.1	90	7-02153-02
DISQ METAL SQUARE	216 x 216	2700		•	400	5.1	90	7-02155-02



SNOOKER

SNOOKER SHINE





CAN-HAVE ACCESSORY: SHINE RING













COLOR TEMPERATURE CCT



BEAMWIDTH

MEDIUM 32° up to VERY WIDE FLOOD 58°





SNOOKER


25 PROLICHT COLORS



SNOOKER

DESCRIPTION	DIMENSION mm	CCT	LUME	N MAX. WATT	CRI	ARTN°
SNOOKER	Ø 72	2700 3500	4000 3	52 6.5	90	7-02232-02



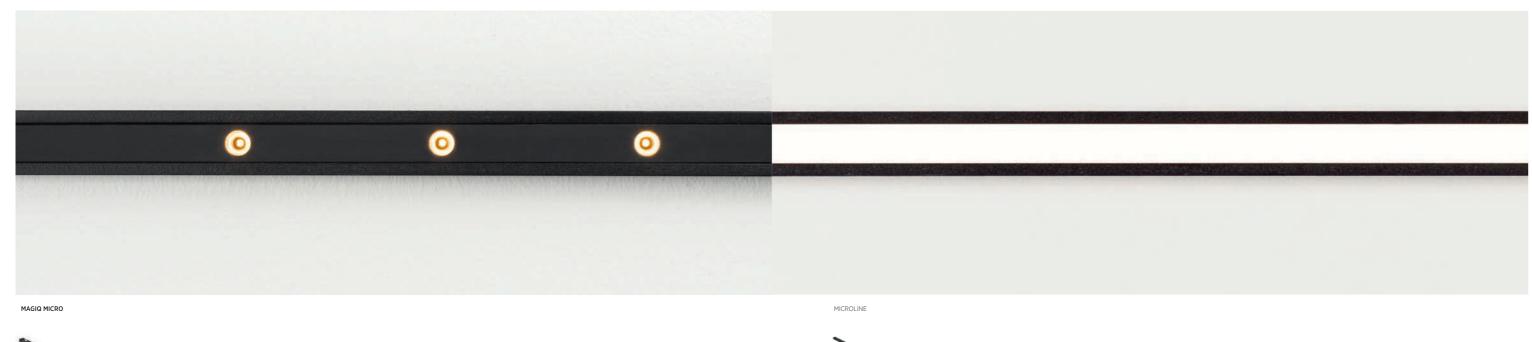

COLOR TEMPERATURE CCT

2700 K 3000 K

BEAMWIDTH

DIRECT



WIDE FLOOD 54



COLOR TEMPERATURE CCT

2700 K 3000 K

DIFFU



MAGIQ MICRO

DESCRIPTION	DIMENSION mm		CCT	LUMEN MAX.	WATT	CRI	ARTN°
MAGIQ MICRO	L: 300	2700	3000	365	5.5	90	7-02400-02

MICROLINE

DESCRIPTION	DIMENSION mm	CCT	LUMEN MAX./M	WATT/M	CRI	ARTN°
MICROLINE	L: 674 (508+166)	2700 3000	• 386	8	90	7-02401-02
	L: 1174 (1008+166)	2700 3000	• 772	15.8	90	7-02402-02
	L: 1674 (1508+166)	2700 3000	• 1158	24	90	7-02403-02

COMPONENTS

ARTICLE	DESCRIPTION	COLOR	ARTN°
	TRACK POWDER COATED 1000 mm	1-29	350-1885
	TRACK POWDER COATED 2000 mm	1-29	350-1886
	TRACK POWDER COATED 3000 mm	1-29	350-1887
	TRACKMASK 5 m	BLACK	350-1896
16	MOUNTING SCREWS Set 50 pieces		800-1427
><	X-CONNECTOR	1-29	350-1994
>	T-CONNECTOR	1-29	350-1995
	LINEAR CONNECTOR	BLACK	350-1868
>	FLAT CORNER CONNECTOR	BLACK	350-1869
7	DIHEDRAL CONNECTOR	BLACK	350-1870
_	FLEXIBLE CONNECTOR	BLACK	350-1871


MINIMAL TRACK | COMPONENTS

	DESCRIPTION	COLOR	ARTN°
	CURVED TRACK Ø 1600 mm 45°	1-29	350-1894
	CURVED TRACK Ø 1600 mm 90°	1-29	350-1895
1	CURVED TRACK Ø 1600 mm 180°	1-29	350-1904
>	CURVED CONNECTOR Ø 400 mm 90°	1-29	350-1892
>	CURVED CONNECTOR Ø 800 mm 45°	1-29	350-1893
	ENDCAP	BLACK	350-1872
	90° FLAT DUMMY TRACK QUICK INSTALLATION	BLACK	350-1876
	90° DIHEDRAL DUMMY TRACK QUICK INSTALLATION	BLACK	350-1877
	PLUG-CONNECTOR 2/4 m	1-29	800-1428
	PLUG-CONNECTOR 10 m	1-29	800-1429
	PLUG-CONNECTOR OVER TABLE INCL. CABLE ROLLER 1.1 m	1-29	800-1434

ARTICLE	DESCRIPTION	WATT	COLOR	ARTN°
000	WALL/CEILING CABLE LOOP		1-29	350-2060
0	WALL/CEILING CABLE ROLLER		1-29	350-2061
3	TRACK CABLE LOOP		1-29	350-2062
	TRACK CABLE ROLLER		1-29	350-2063
	SUSPENDED ROLLER		1-29	350-2064
	FEED UNIT END + 2.5 m SUPPLY CABLE		BLACK	350-1866
-	FEED UNIT CENTRAL + 2.5 m SUPPLY CABLE		BLACK	350-1867
	DRIVER BOX ENDINSTALLATION ON / OFF 240 x 75 x 35 mm	96	1-29	350-1873
	DRIVER BOX ENDINSTALLATION DALI 240 x 120 x 35 mm	86	1-29	350-1996
	DRIVER BOX ENDINSTALLATION PUSH DIM 240 x 120 x 35 mm	92	1-29	350-1898
	DRIVER BOX ENDINSTALLATION CASAMBI 240 x 120 x 35 mm	86	1-29	350-1899
	DRIVER BOX CENTRAL INSTALLATION ON / OFF 240 x 75 x 35 mm	96	1-29	350-1874

MINIMAL TRACK | COMPONENTS

ARTICLE	DESCRIPTION	WATT	COLOR	ARTN°
	DRIVER BOX CENTRAL INSTALLATION DALI 240 x 120 x 35 mm	86	1-29	350-1997
	DRIVER BOX CENTRAL INSTALLATION PUSH DIM 240 x 120 x 35 mm	92	1-29	350-1900
	DRIVER BOX CENTRAL INSTALLATION CASAMBI 240 x 120 x 35 mm	86	1-29	350-1901
	POWER SUPPLY 48 V	90		350-1875
V	REMOTE SET PUSH DIM	92		350-1905
	REMOTE SET CASAMBI	86		350-1906
	REMOTE SET DALI	86		350-1998
1	POWER SUPPLY 48 V	320		350-2065
	REMOTE SET PUSH DIM	315		350-2066
	REMOTE SET CASAMBI	310		350-2067
	REMOTE SET DALI	310		350-2068

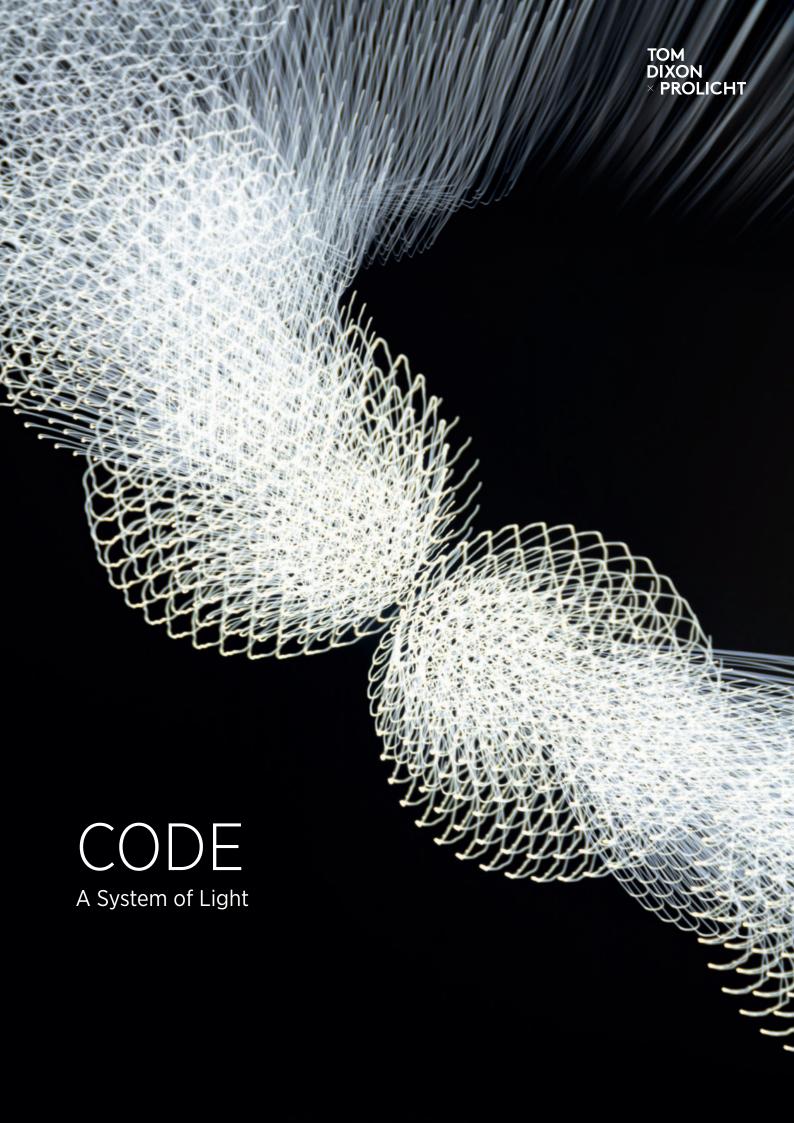





Tom Dixon, Founder Tom Dixon Studio



Walter Norz, CEO PROLICHT


DESIGN & TECHNOLOGY

"For the past year, we've been obsessed with printed circuit boards (PCBs). So flat, so efficient, and so very luminous! Our collaboration with PRO-LICHT started high in the mountains of Innsbruck where we shared our first thoughts on a Minimal Track System that would attempt to remove the superfluous and reveal the light engine in all its naked glory."

"It was amazing how quickly the connection with Tom and his team started. From our very first meeting, the sparkle of creativity was there, and we all immediately felt an urge to start some-thing together. Our first joint adventure, CODE, represents the epitome of our collaboration: something neither of us could have done without the other. Two different backgrounds and complementary skills merging to create the perfect product."

Tom Dixon Walter Norz



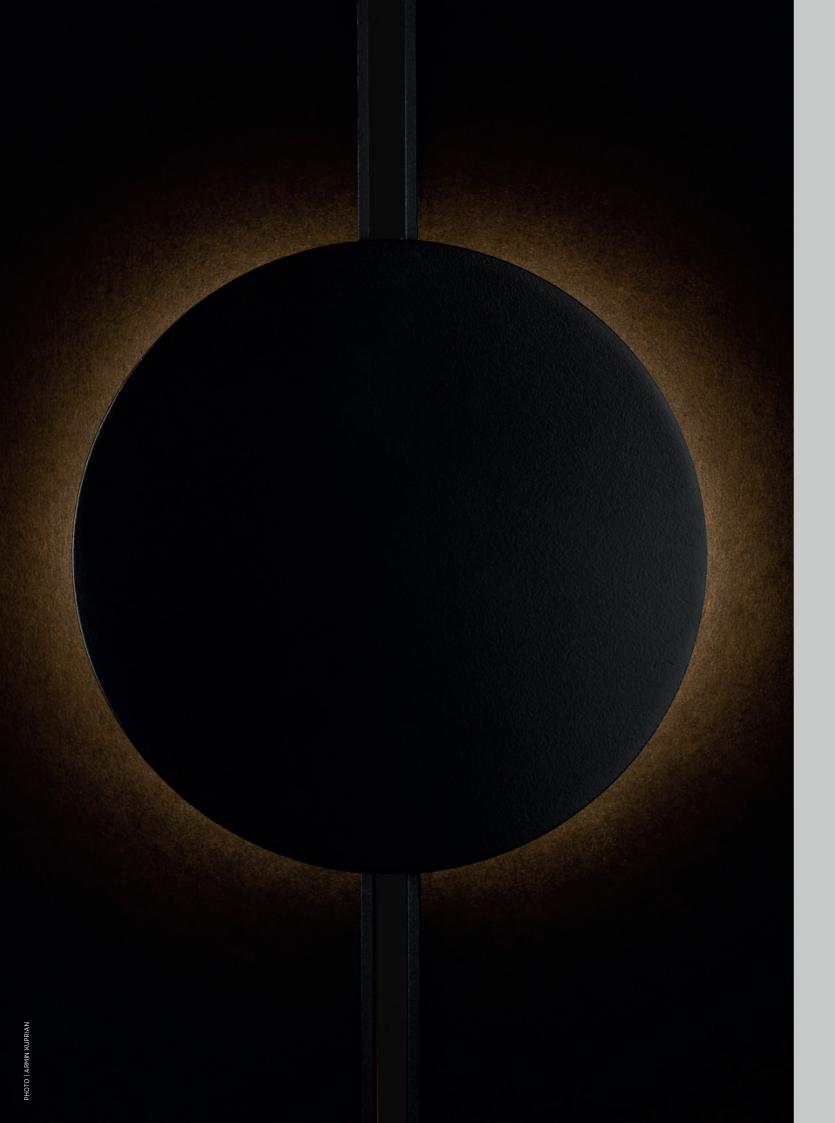


CODE

CODE represents the perfect synthesis of our cooperation with Tom Dixon: a product that merges technological expertise with a unique design vision, an innovation that could only be created together. CODE works with the MINIMAL TRACK system, the smallest track solution possible that offers individual control of each luminaire, enabling total flexibility of a space.

The CODE family is composed of two LED light sources: DOT and GRID. The elementary shapes of round and square form the basis of a kit of parts, building blocks to configure infinite arrangements, from the simplest graphic shape to the most exuberant lighting sculpture.

Run at full power, these arrays deliver raw, unfiltered light. Dimmed down, the boards act as decorative elements: graphic patterns of light, which pop out and appear to float against black backgrounds. Each board is naked: stripped of diffusers, lenses and secondary optics. A circuit, which has been inflated, exaggerated and magnified, is exposed, revealing the direction of power from the track through technical componentry and onto the LED.

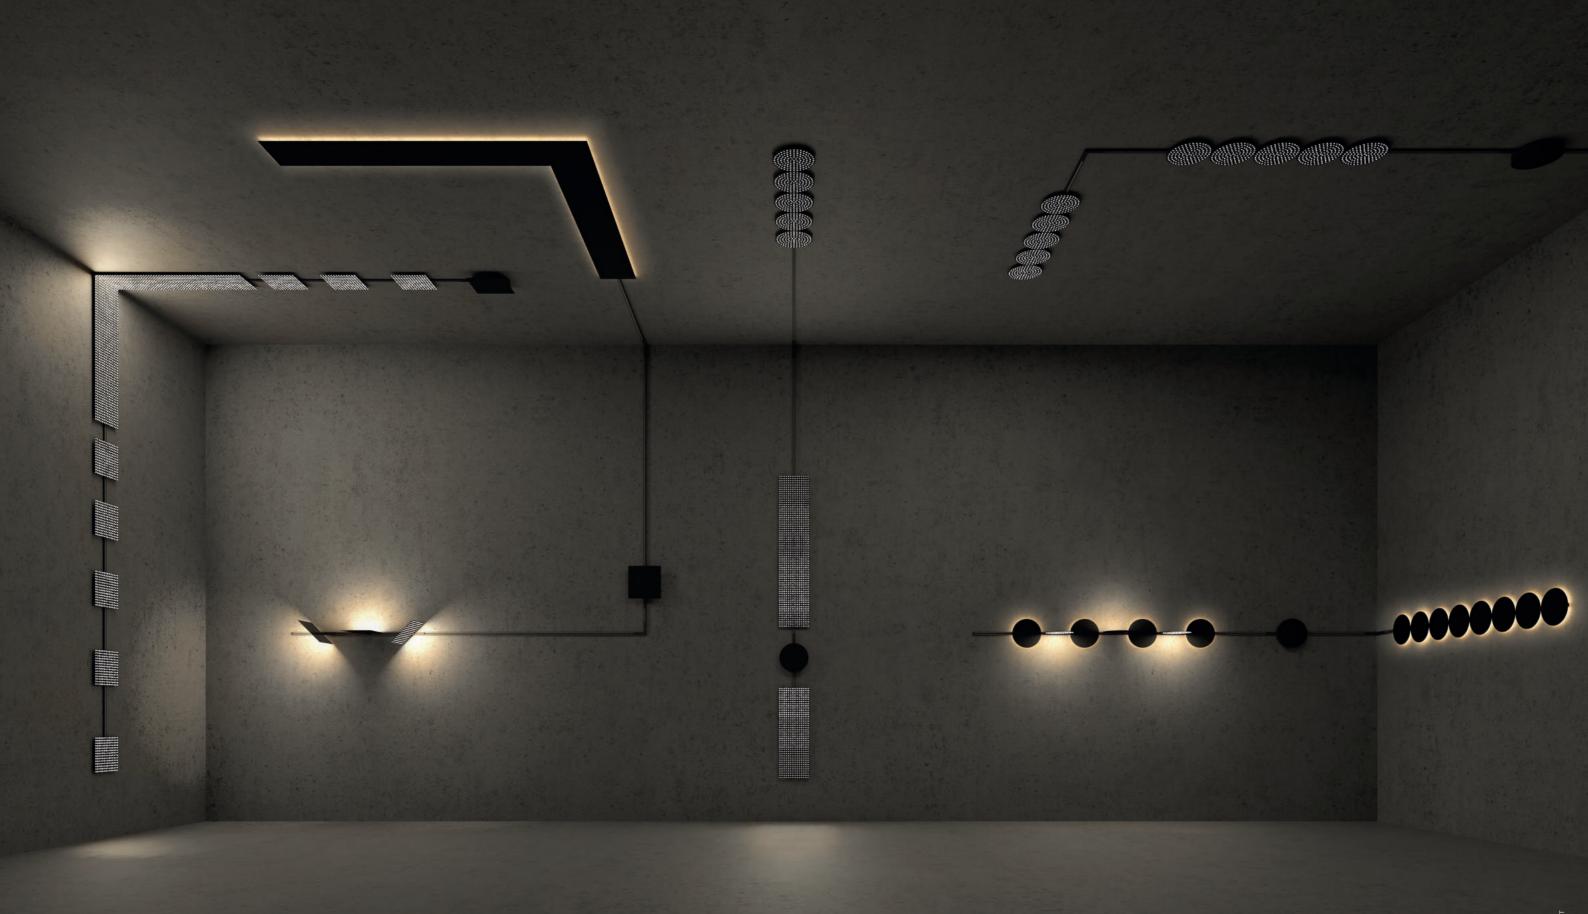

CODE FAMILY | OVERVIEW


01 DOT DIRECT 4.1W - up to 450lm 2700K






02 GRID DIRECT 4.3W - up to 460lm 2700K





03 DOT INDIRECT 4.7W - up to 400lm 2700K






04 GRID INDIRECT 4.7W - up to 400lm 2700K







05 DOT STANDING 4.1W - up to 450lm 2700K





05 GRID STANDING 4.3W - up to 460lm 2700K












80 GRID POWER DALI | PUSH DIM | CASAMBI for max. 96W







09 DASH 2.1 | 4.2 m DALI 2700K



CODE DOT

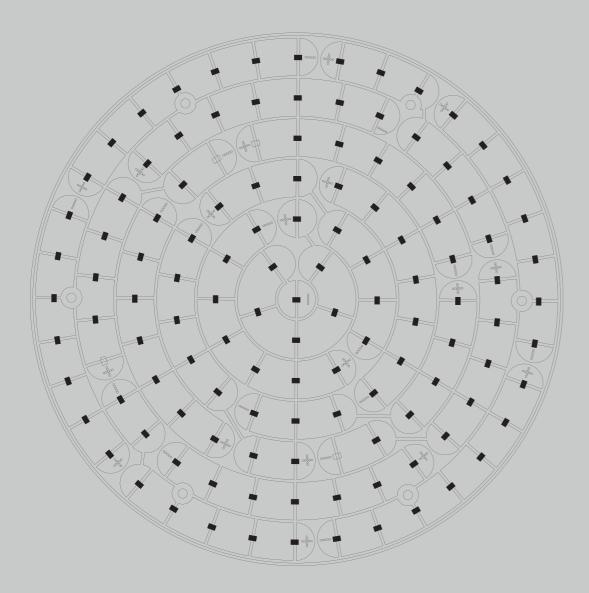



DOT INDIRECT

DOT STANDING

DOT POWER



















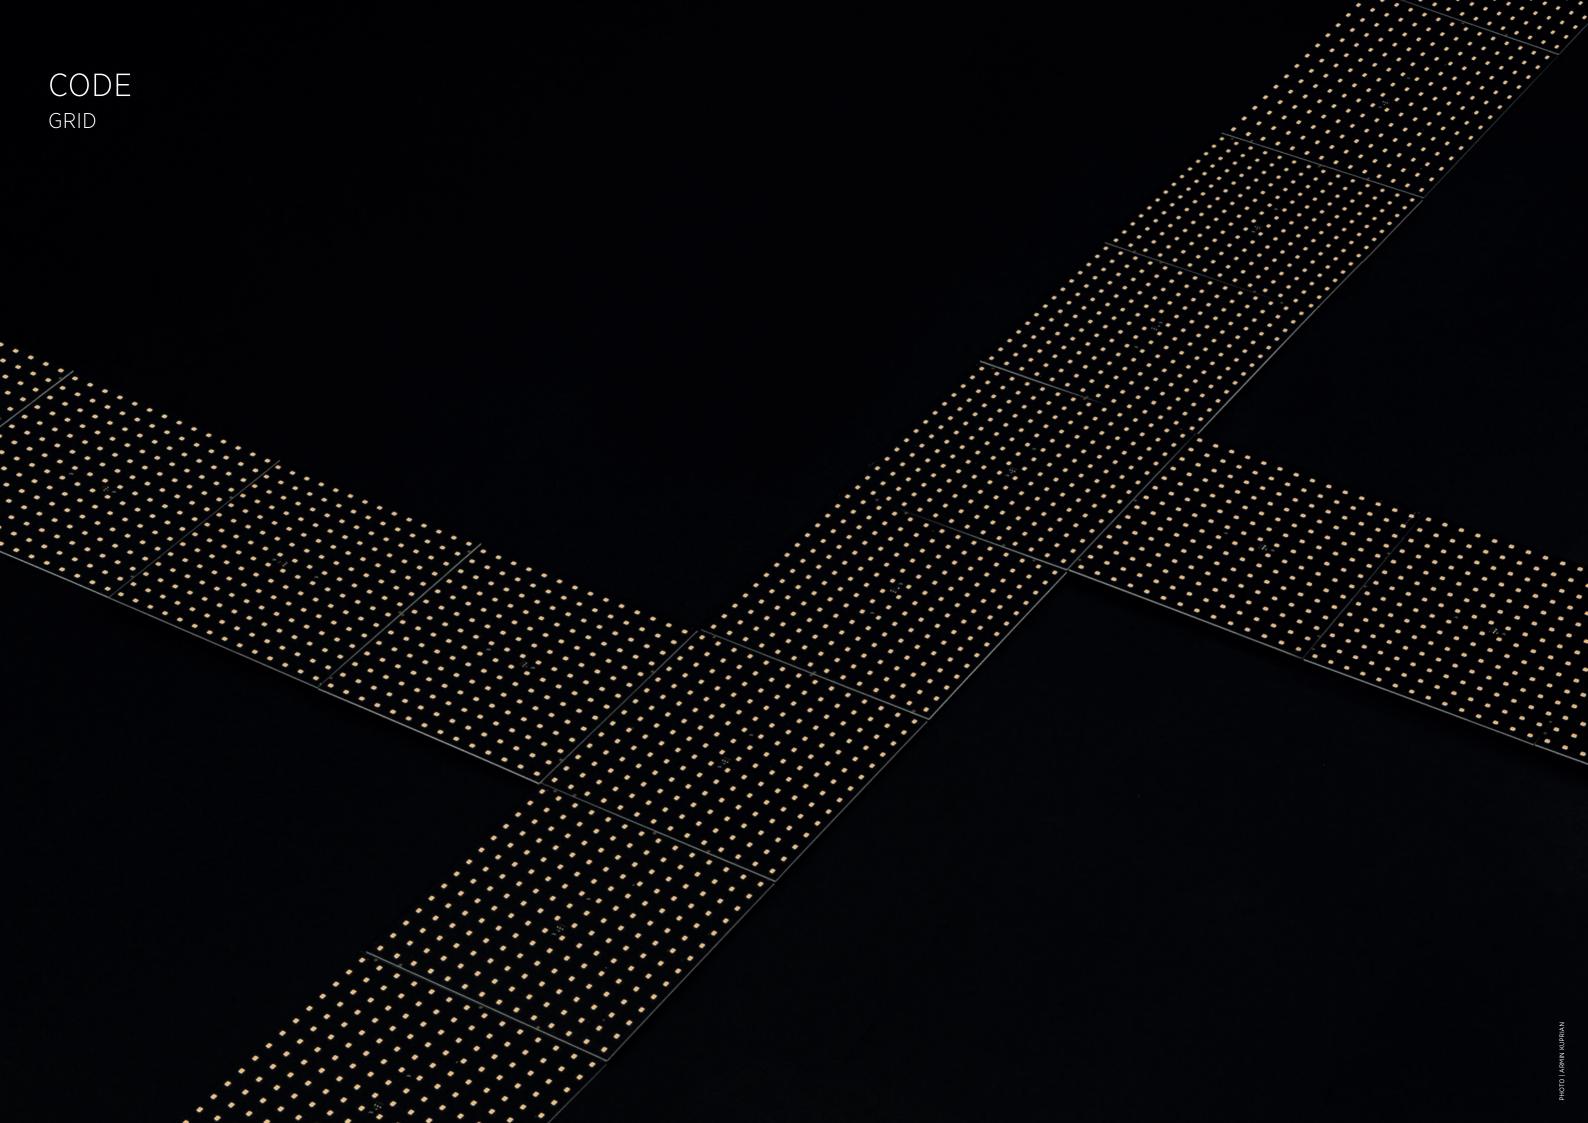

CODE

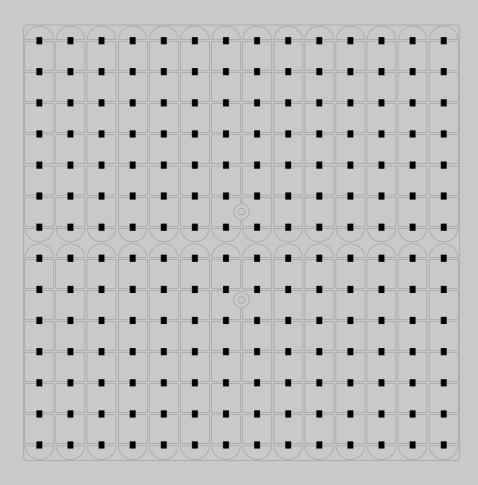

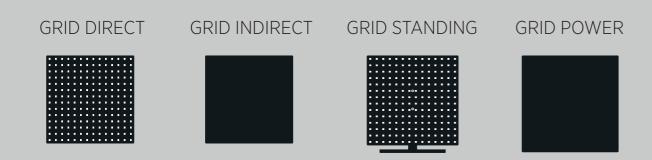


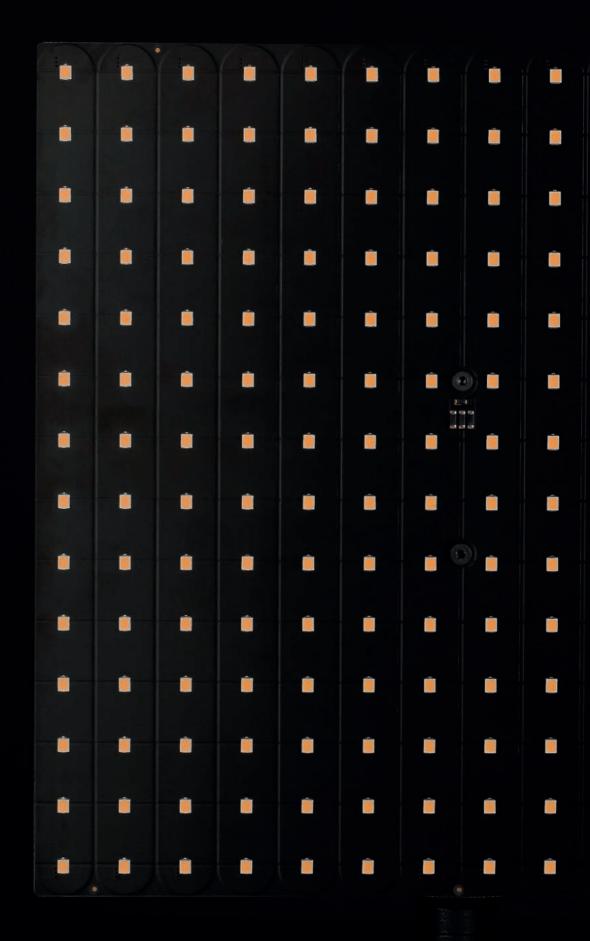







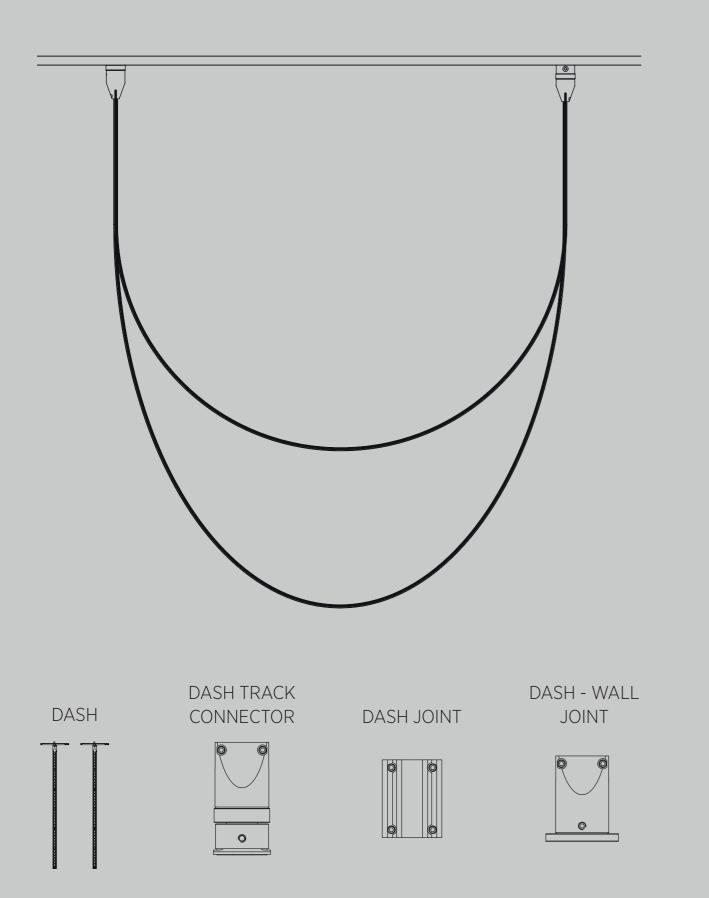












DRAW WITH THE MINIMAL TRACK

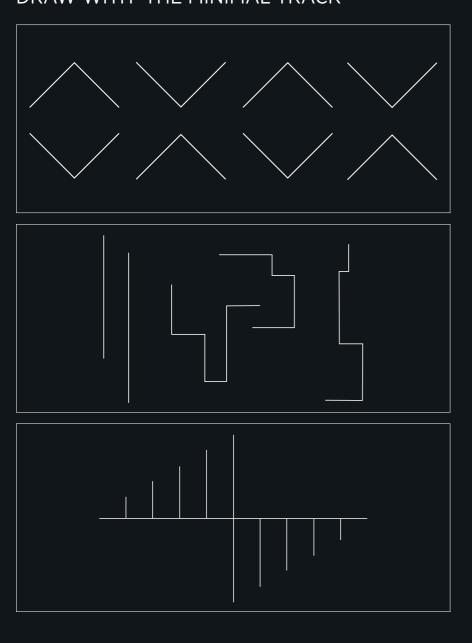

DEFINE YOUR POWER REQUIREMENTS

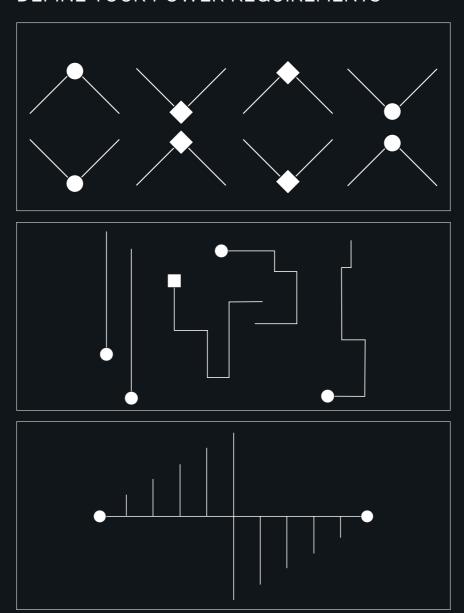

DESIGN YOUR CODE SYSTEM

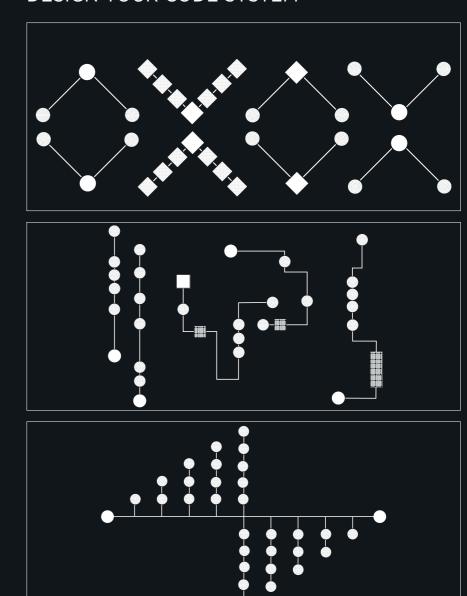

CODE

LIGHT

DOT DIRECT

DOT DIRECT 200 48V	7-02108-02	ø 200 H: 13mm	2700K	450lm	DALI	4.2W	BLACK
DOT STANDING 200 48V	7-02109-02	ø 200 H: 220mm	2700K	450lm	DALI	4.2W	BLACK

DOT INDIRECT

	DOT INDIRECT 200 48V	7-02110-02	ø200 H: 13mm	2700K	400lm	DALI	5.1W	BLACK	
--	-------------------------	------------	--------------	-------	-------	------	------	-------	--

GRID DIRECT

GRID DIRECT 200 48V	7-02111-02	210x210 H:13mm	2700К	460lm	DALI	4.2W	BLACK
GRID STANDING 200 48V	7-02112-02	210x210 H: 230mm	2700K	4601111	DALI	4.2 VV	BLACK

GRID INDIRECT

DASH

D7 (O11								
	DASH	7-02122-02	2.1m	2700K	530lm	DALI	5W	BLACK
	DASIT	7-02123-02 4.2m	2700K	1060lm	DALI	10W	BLACK	
	DASH-TRACK CONNCETOR	350-2050						BLACK
	DASH-DASH JOINT	350-2051						BLACK
1	DASH-WALL JOINT	350-2052						BLACK

IMAGINE MICRO

-	IMAGINE MICRO 20	7-02118-02	ø23 H: 71mm	2700K 3000K 4000K	236lm	DALI	3,7W	☐ OPTION SPOT MEDIUM	BLACK
0	IMAGINE MICRO 35	7-02119-02	ø35 H: 95mm	2700K 3000K 4000K	669lm	DALI	8,6W	☐ OPTION SPOT MEDIUM	BLACK

MINIMAL TRACK

		350-1885-02	1000x19 H: 10mm	
	TRACK	350-1886-02	2000x19 H: 10mm	BLA
		350-1887-02	3000x19 H: 10mm	
	TRACKMASK	350-1896	5000mm	BLA

CONNECTORS TRACK

>	T-CONNECTOR	350-1995-02	160x89 H: 10mm	BLACK
~	X-CONNECTOR	350-1994-02	160x160 H: 10mm	BLACK
_	LINEAR CONNECTOR	350-1868	115x11 H: 7mm	BLACK
>	FLAT CORNER CONNECTOR	350-1869	85x85 H: 7mm	BLACK
7	DIHEDRAL CORNER CONNECTOR	350-1870	88x11 H: 88mm	BLACK
	90° DIHEDRAL DUMMY TRACK QUICK INSTALLATION	350-1876	24x24 H: 10mm	BLACK
	90° DIHERAL DUMMY TRACK QUICK INSTALLATION	350-1877	22x22 H: 20mm	BLACK
	ENDCAP	350-1872	8x19 H: 10mm	BLACK

CODE POWER

DOT POWER

	· • • · · · · · · · · · · · · · · · · ·						
		350-1910-02			PUSH DIM	MAX. 92W	
	DOT POWER ENDFEED	350-1912-02	ø 225 H: 38mm		DALI	MAX. 86W	BLACK
		350-1913-02			CASAMBI	MAX. 86W	
		350-1920-02			PUSH DIM	MAX. 92W	
	DOT POWER MIDDLEFEED	350-1922-02	ø 225 H: 38mm	DALI	MAX. 86W	BLACK	
		350-1923-02			CASAMBI	MAX. 86W	
		350-1940-02			PUSH DIM	MAX. 92W	
	DOT POWER L	350-1942-02	ø225 H: 38mm		DALI	MAX. 86W	BLACK
		350-1943-02			CASAMBI	MAX. 86W	
		350-1950-02			PUSH DIM	MAX. 92W	
	DOT POWER T	350-1952-02	ø 225 H: 38mm	DALI	MAX. 86W	BLACK	
		350-1953-02			CASAMBI		MAX. 86W
		350-1930-02			PUSH DIM	MAX. 92W	
	DOT POWER X	350-1932-02	ø 225 H: 38mm		DALI	MAX. 86W	BLACK
		350-1933-02			CASAMBI	MAX. 86W	
_	DOT DOWED	350-1960-02	005 11 70		PUSH DIM	MAX. 92W	
	DOT POWER STAND ALONE SINGLE	350-1962-02	ø 225 H: 38mm (cable length - 0-2m adjustable)		DALI	MAX. 86W	BLACK
	SINGLE	350-1963-02	0-2111 aujustable)		CASAMBI	MAX. 86W	
	DOT DOWER	350-1970-02	005 11 70		PUSH DIM	MAX. 92W	
	DOT POWER STAND ALONE	350-1972-02	ø 225 H: 38mm (cable length 0-2m adjustable)		DALI	MAX. 86W	BLACK
	DOUBLE	350-1973-02	2111 aujustabie)		CASAMBI	MAX. 86W	

GRID POWER

		350-1980-02			PUSH DIM	MAX. 92W	
	GRID POWER ENDFEED	350-1982-02	225x225 H: 38mm		DALI	MAX. 86W	BLACK
		350-1983-02			CASAMBI	MAX. 86W	
		350-1990-02			PUSH DIM	MAX. 96W	
	GRID POWER MIDDLEFEED	350-1992-02	225x225 H: 38mm		DALI	MAX. 86W	BLACK
		350-1993-02			CASAMBI	MAX. 86W	
		350-2010-02			PUSH DIM	MAX. 92W	
	GRID POWER L	350-2012-02	225x225 H: 38mm		DALI	MAX. 86W	BLACK
		350-2013-02		CASAMBI	MAX. 86W		
		350-2020-02			PUSH DIM	MAX. 92W	
	GRID POWER T	350-2022-02	225x225 H: 38mm	DALI	MAX. 86W	BLACK	
		350-2023-02			CASAMBI		MAX. 86W
		350-2000-02			PUSH DIM	MAX. 92W	
	GRID POWER X	350-2002-02	225x225 H: 38mm		DALI	MAX. 86W	BLACK
		350-2003-02			CASAMBI	MAX. 86W	
_	CDID DOWED	350-2030-02	225225 11. 70		PUSH DIM	MAX. 92W	
	GRID POWER STAND ALONE SINGLE	350-2032-02	225x225 H: 38mm (cable length 0-2m adjustable)		DALI	MAX. 86W	BLACK
	SHOLL	350-2033-02	o ziii dajustubie)		CASAMBI	MAX. 86W	
	GRID POWER STAND ALONE DOUBLE	350-2040-02			PUSH DIM	MAX. 92W	
		350-2042-02	225x225 H: 38mm (cable length 0-2m adjustable)		DALI	MAX. 86W	BLACK
	DOUBLE	350-2043-02	o ziii aujustabie)		CASAMBI	MAX. 86W	

POWER SUPPLY

	48V POWER SUPPLY	350-1875	FOR REMOTE INSTALLATION	252x28 H: 20mm	-
V	REMOTE SET PUSHDIM	350-1905	FOR REMOTE INSTALLATION	90x44 H: 23mm	-
0	REMOTE SET CASAMBI	350-1906	FOR REMOTE INSTALLATION	164x42 H: 25mm	-
0	REMOTE SET DALI	350-1998	FOR REMOTE INSTALLATION	252x28 H: 20mm	-
	FEED UNIT END	350-1866		108x19 H: 12mm	BLACK
\	FEED UNIT CENTRAL	350-1867		141x11 H: 12mm	BLACK