
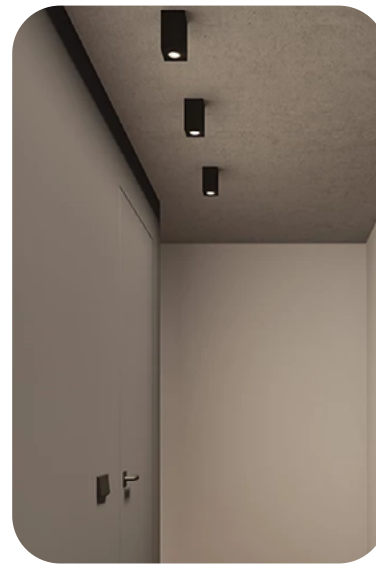


# Oiko Pro




## Technical Overview

Architectural

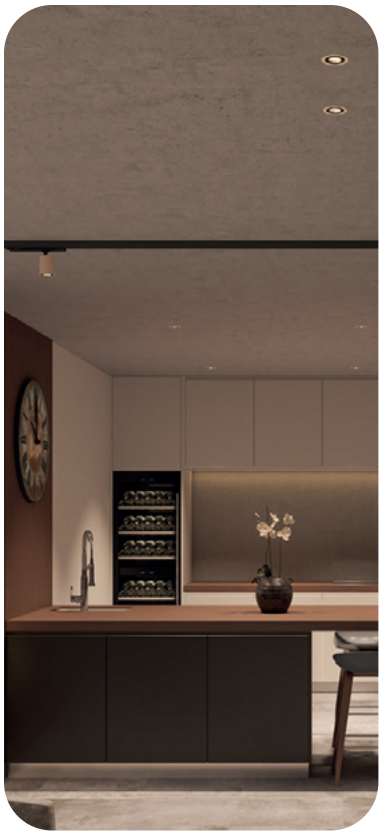


# Oiko Pro

Technical Overview


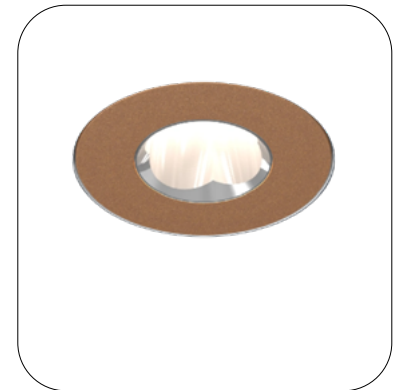
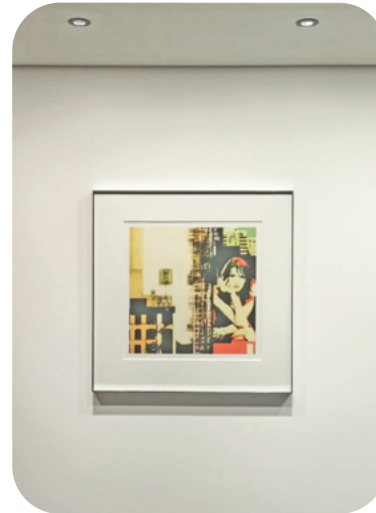
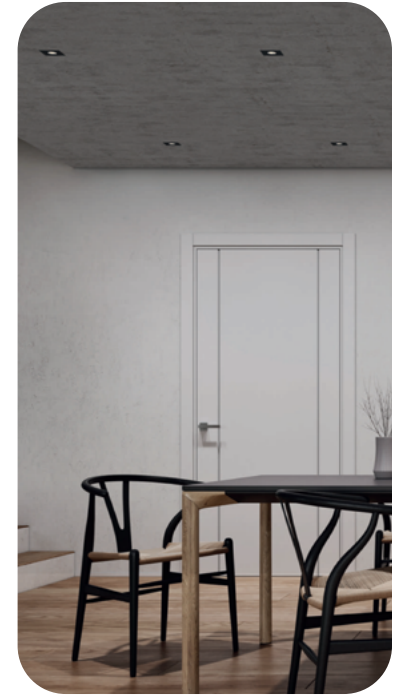


# Features Summary

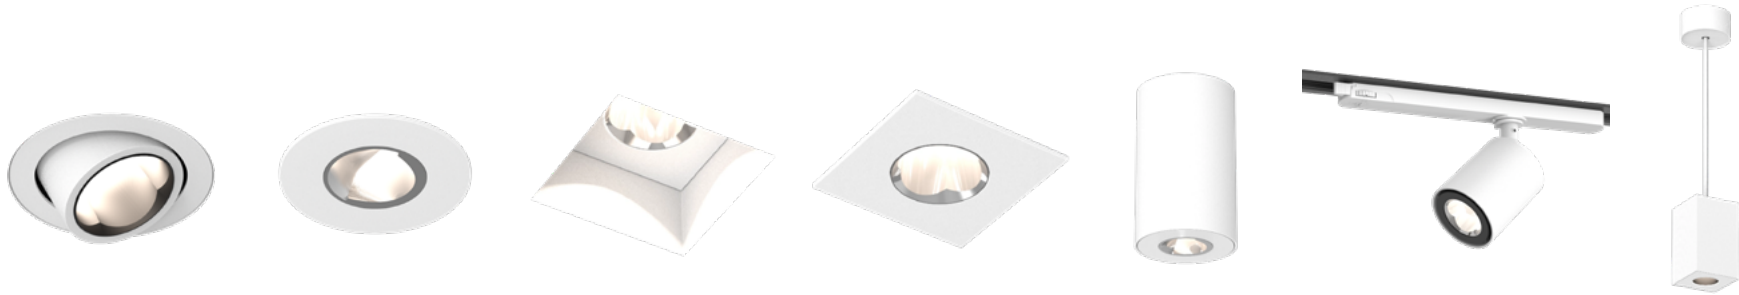

## Oiko Pro

- 
- Perfect light emission and the purest beam angles;
  - Features a double-function wallwash reflector, capable of illuminating vertical surface and serving as a downlight at the same time;
  - Standard Ø68mm cutout provides a uniform appearance;
  - Range includes low and high outputs to meet your design needs;
  - Patented BARTENBACH reflectors enables the game of light, creating sharp light for dramatic scenes in comparison to the Centriq;
  - The track version can be integrated into all applications (trimless, recessed, surface, or suspension) - our most popular choice being the Hypro;
  - The innovative air-cooling system enables a longer lifetime for the fixture and guarantees efficient heat management;
  - Surface and suspension versions expand the family and maintain the consistency across all applications.

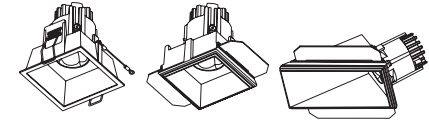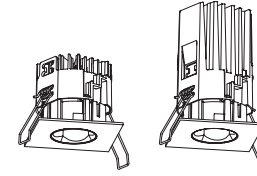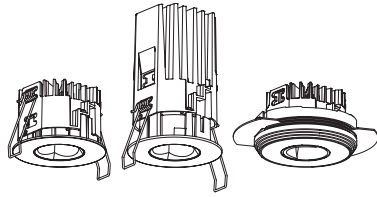

## Compare models

### Oiko Pro Round Recessed | Trimless

### Oiko Pro Adjustable Recessed | Trimless




### Oiko Pro Square Recessed

### Oiko Pro Square Comfort Recessed | Trimless

DIMENSIONS	(mm)	Ø75xH43-67   Ø75xH43/51/65 Ø75xH92-118 (HO†)	Ø75xH93/103/116	□75xH43-67 □75xH92-117 (HO†)	□92xH100   □74xH100 140x70xH96
LED	CCT: Kelvin (°K)	2700 / 3000 / 3500 / 4000	2700 / 3000 / 3500 / 4000	2700 / 3000 / 3500 / 4000	2700 / 3000 / 3500 / 4000
	Lumen (lm)	709 - 2394   709 - 1645	709 - 1645	709 - 2394	863 - 1599   846 - 1582 799 - 1497
	Wattage (W)	14 - 24.2   14 - 16	14 - 16	14 - 24.2	15 - 15.5
CONTROL	Tunable White 2700K-6500K	✓	✓	✓	✗
PROTECTION	IP Rating	IP20 / IP44 / IP54   IP20	IP20 / IP40   IP20	IP20 / IP44 / IP54	IP20
OPTICAL	Adjustability	fixed	↙ 0-25° ↻ 0-350°	fixed	fixed
	Beam Angles	14° / 16° (IP54) / 34° / 50° / 60° TW: 36° / 52° / 62° Wallwash	14° / 16° / 34° / 50° / 60° TW: 36° / 52° / 62°	14° / 16° (IP54) / 34° / 50° / 60° TW: 36° / 52° / 62° Wallwash	58°   56° Wallwash (Asymmetric version)

29 Available colors -

+ High Output



## Compare models

**Oiko Pro Round**  
Surface | Suspension

**Oiko Pro Square**  
Surface | Suspension

**Oiko Pro In**  
Track

DIMENSIONS	(mm)	Ø75xH125	□75xH125	Ø65xH80/92
LED	CCT: Kelvin (°K)	2700 / 3000 / 3500 / 4000	2700 / 3000 / 3500 / 4000	2700 / 3000 / 3500 / 4000
	Lumen (lm)	954-1451	954 - 1451	919 - 1932
	Wattage (W)	12.9 - 13.7	12.9 - 13.7	14 - 20.9
CONTROL	Tunable White 2700K-6500K	✘	✘	✔
PROTECTION	IP Rating	IP20	IP20	IP20
OPTICAL	Adjustability	fixed	fixed	↙ 0-90° ↻ 0-350°
	Beam Angles	14° / 34° / 50° / 60° Wallwash (Surface)	14° / 34° / 50° / 60° Wallwash (Surface)	14° / 34° / 50° / 60° TW: 62° Wallwash

29 Available colors - 

# ZANEEN

This product catalog has been provided by Zaneen.  
Contact your local representative, [zteam@zaneen.com](mailto:zteam@zaneen.com) or 1-800.388.3382