

Caliber

Exterior

Cangini & Tucci

Cini & Nils

Fambuena

Letroh

Panzeri

Platek

Ole

Side

UnoNoveSette

Aria

Icone

Linea Zero

Milan

Prolight


Quasar

Tunto

Knickboker

Studio Zaneen

An extensive range of in-grade luminaires offered in various diameters, lumen output, color temperatures and beam angles, to light up an exterior environment.

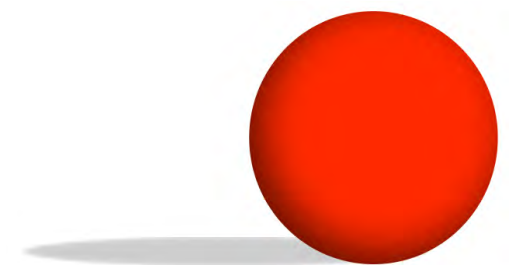

Small but mighty, a constellation of elegant light.




Caliber 25



Caliber 25 XS

Caliber is a large series of recessed lighting suitable for both in-ground (drive-over) and wall applications. Starting at a diameter of only 25mm, these compact spots are the perfect combination of optical excellence and complete resilience.

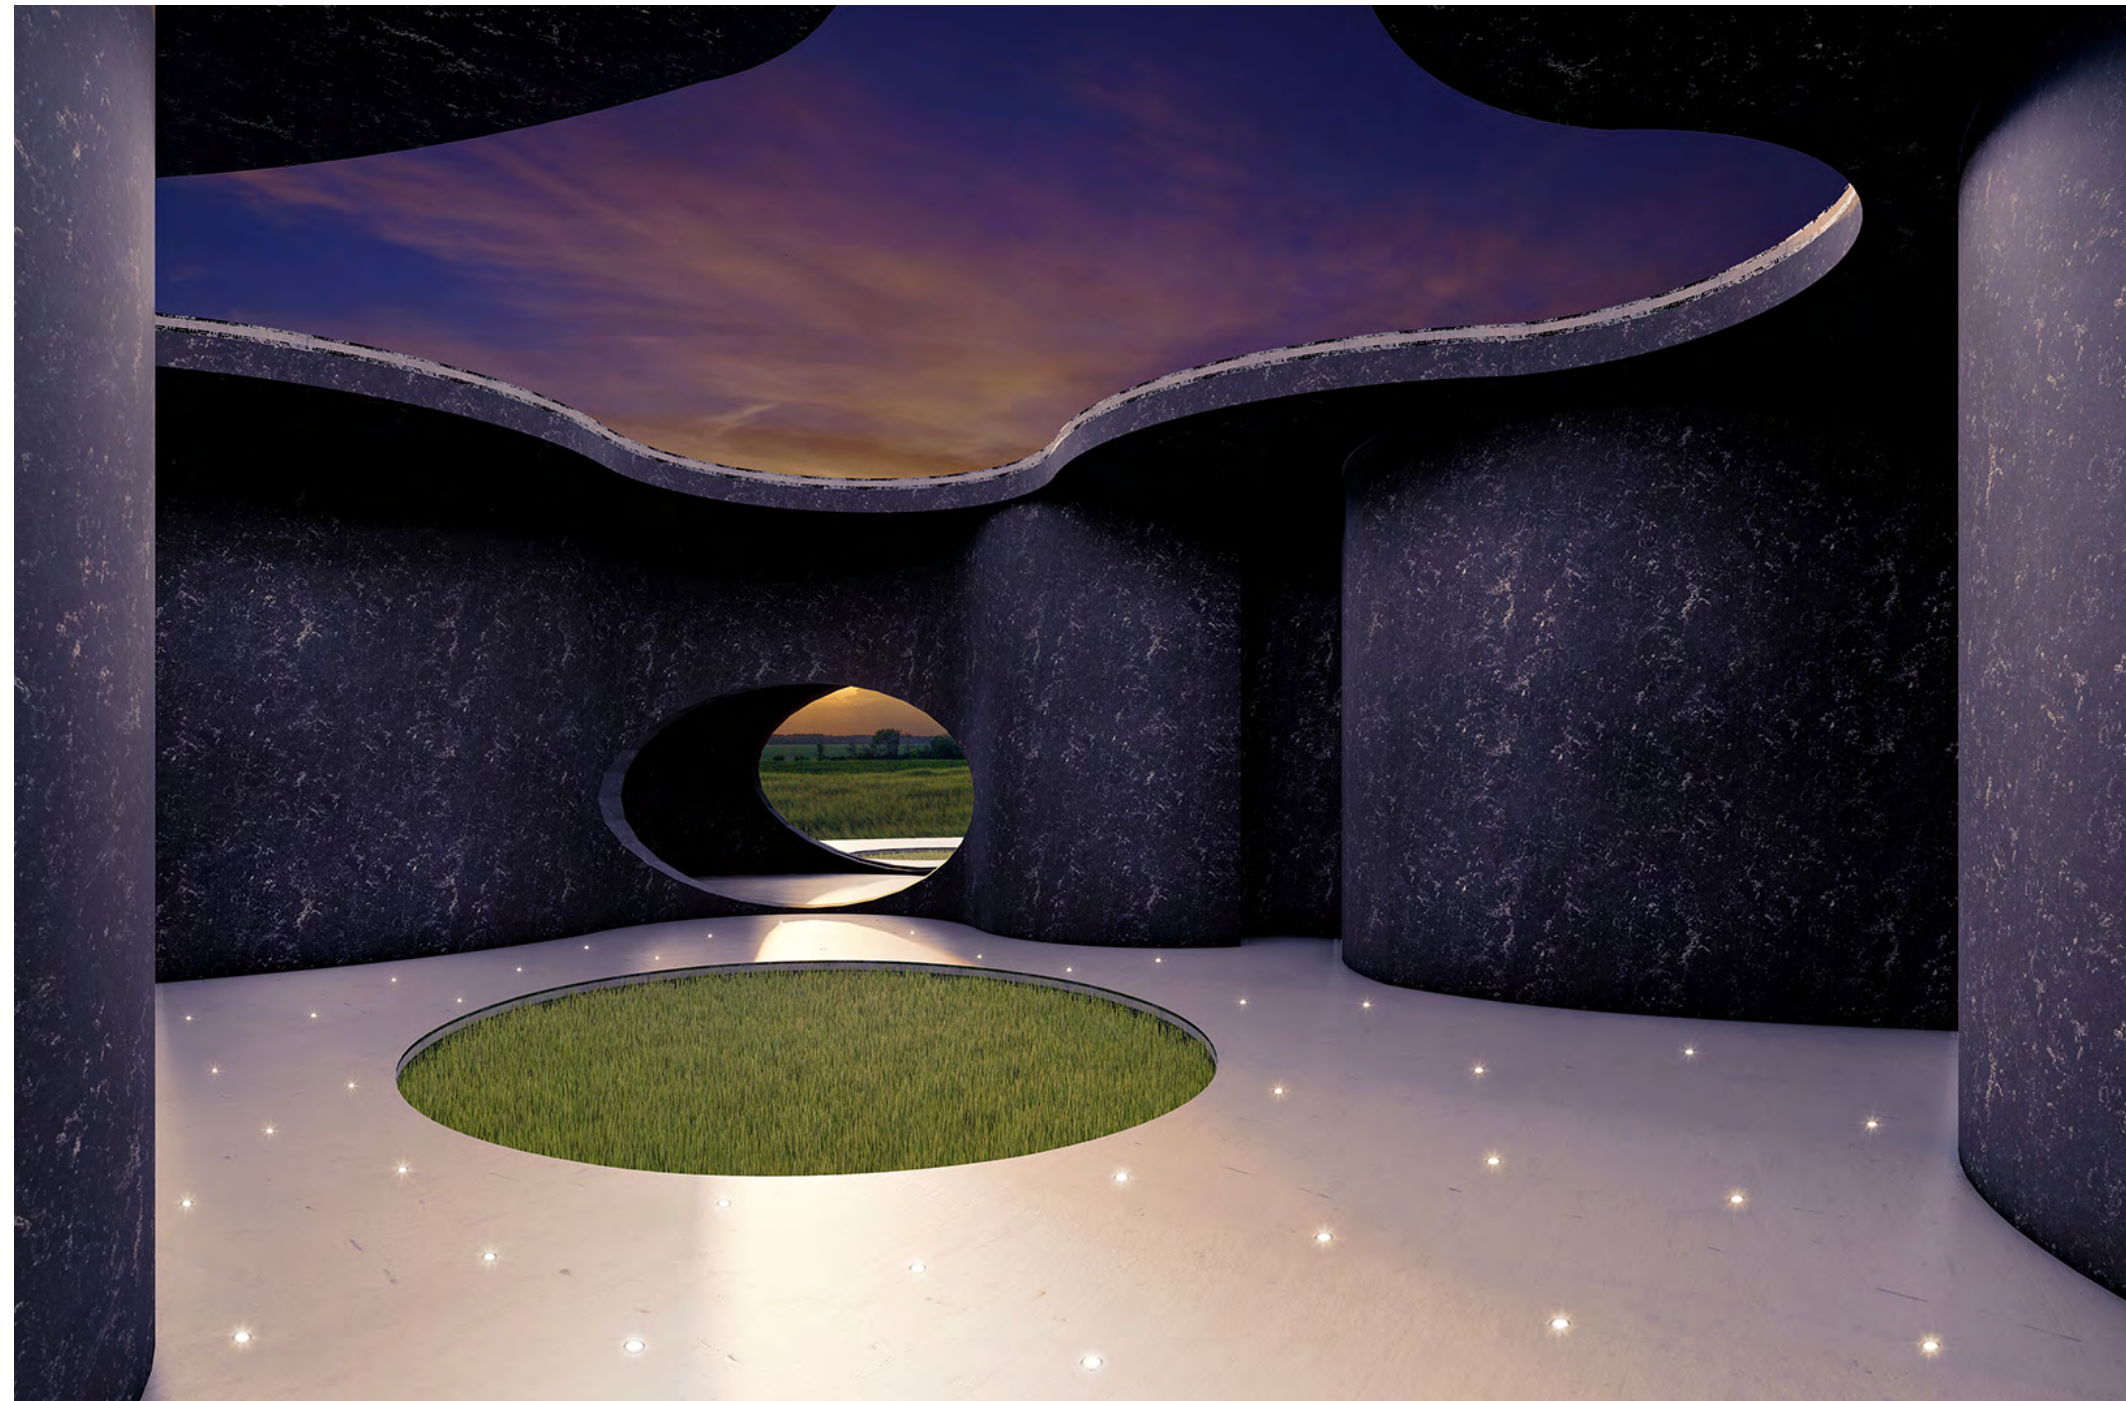



Caliber 52



For most of the Caliber family, choose among the aesthetic and functional stainless steel finish or go for a versatile and subtle look with aged brass.

Illuminate with harmony, with finishes that excel in both appearance and resistance.

Enhance the details that make architecture spectacular.




Caliber 80



Caliber 80 Q

Caliber is available in multiple color temperatures, including RGBW, and offers a variety of beam angle choices: narrow, wide and diffuse options.

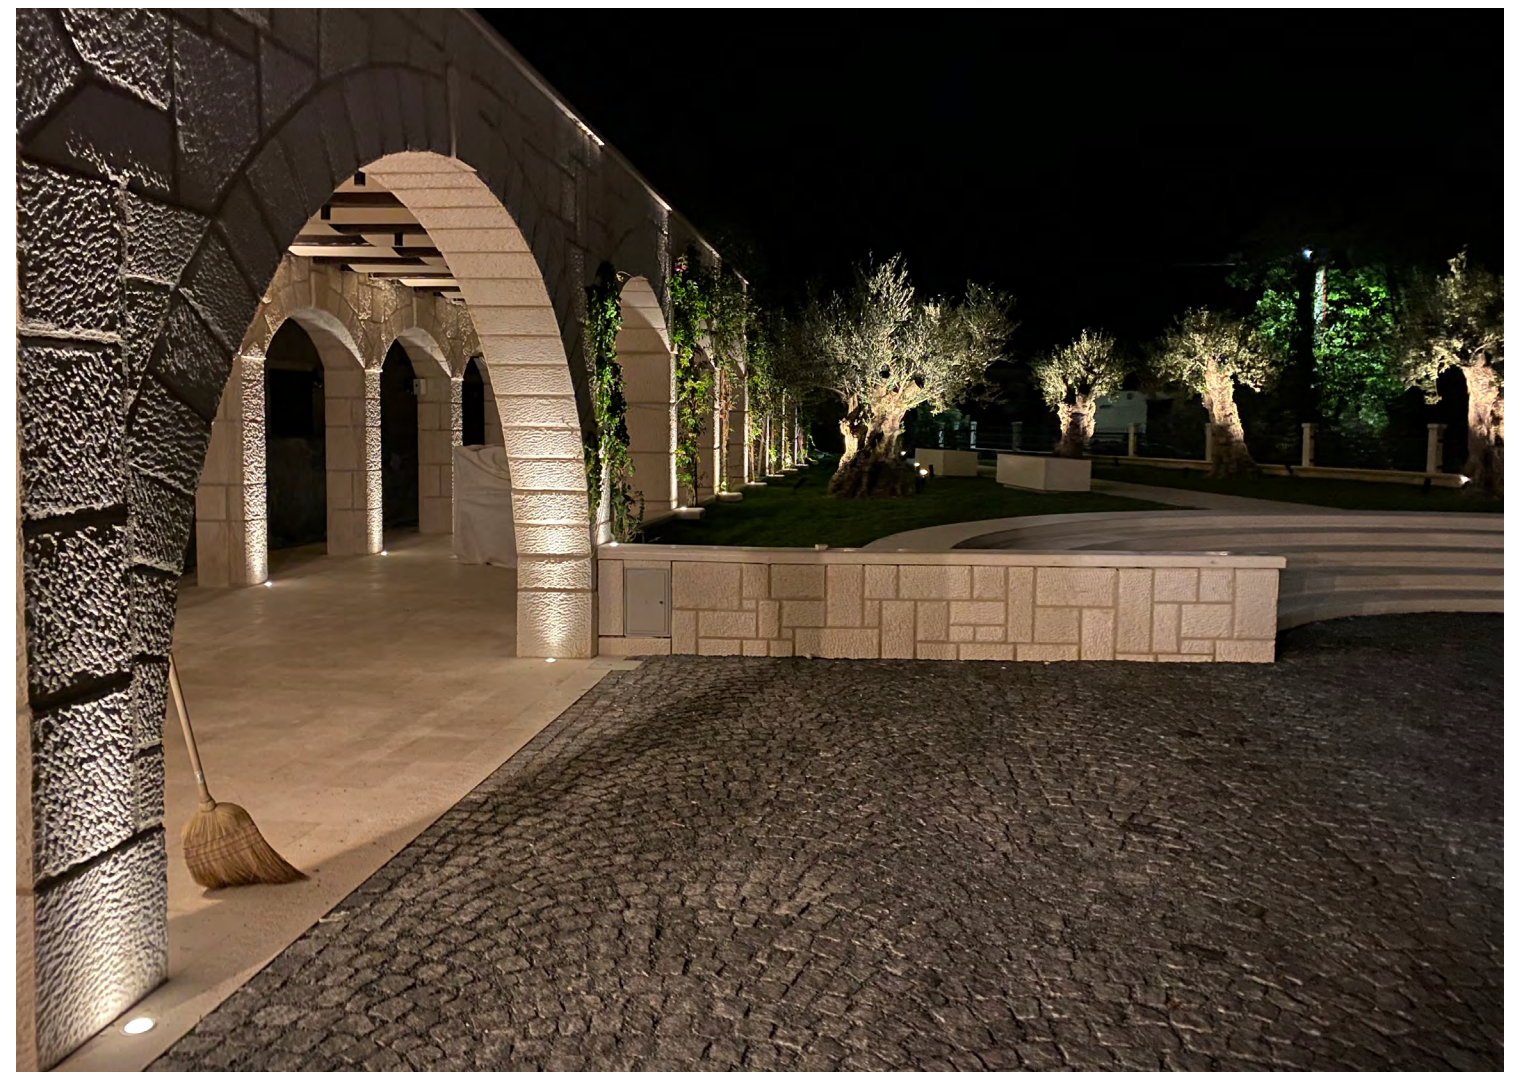

Rhythmic and powerful lighting for large scale facades.



Caliber 120 D



Caliber 150



Caliber 120 D engine offers 360° rotation and up to 15° tilt to illuminate with precision, while the deep recessed LED of Caliber 150 provides excellent glare control, both being great choices for lighting columns and facades.



Light your way up and down with either delicate or spectacular effects.



Caliber Wall





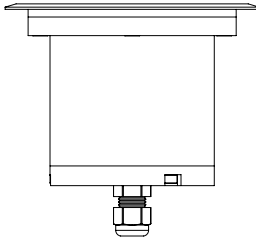
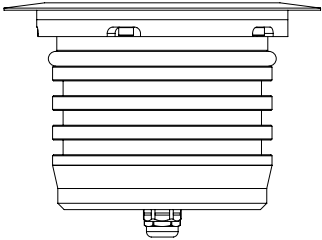




Caliber Wall Q

The entire series features Unonovesette's Smart Shield System which provides complete protection to every component of the fixture and a risk-free installation.



Compare
Caliber models

									
	25	25 XS	52	80	80 Q	120 D	150	Wall	Wall Q
DIMENSIONS (mm)	Ø25x80mm	Ø25x37mm	Ø52x85mm	Ø80x96mm	□80x97.5mm	Ø120x106.5mm	Ø150x111mm	Ø52x71.5mm	□52x71.5mm
COLOR TEMPERATURE (K)	2200 2700 3000 4000	2200 2700 3000 4000	2200 2700 3000 4000	2700 3000 4000 RGBW	2700 3000 4000 RGBW	2700 3000 4000 RGBW	2700 3000 4000	2200 2700 3000 4000	2200 2700 3000 4000
WATTAGE (W)	2	1	2	5 - 9	5 - 9	5 - 8.5	13 - 22	2	2
MAX. DELIVERED LUMEN (lm) <i>(at 3000K)</i>	140	110	140	515 / 730	515 / 730	515 / 730	1418 / 2090	140	140
CRI	>90	>90	>90	>90	>90	>90	>92	>90	>90
FIXTURE FINISHES *	SST	SST / ABA / ANA	SST / ASB	SST / ASB	SST	SST / ASB	SST / ASB	SST / ASB	SST / ASB
OPTIC	10°/ 40°/ DIF	10°/ 40°/ DIF	10°/ 23°/ 43°/ 10°x45°/ DIF	10°/ 30°/ 50°/ 10°x45°/ DIF RGBW: 35°	10°/ 30°/ 50°/ DIF RGBW: 35°	10°/ 35°/ 50° RGBW: 35°	10°/ 20°/ 40°/ 55°/ 10°x45°	10°/ 40°	10°/ 40°

Notes

- The entire series is IP68 (not for permanent immersion) and IK08.
- Caliber 52 and Caliber 80 are available as a submersion solution, suitable for installation in fountains at a maximum level of 1m deep.

* SST - Stainless Steel / ABA - Black Anodized / ANA - Natural Anodized / ASB - Aged Solid Brass

Some information presented in this table were simplified - contact your local representative for a complete report.

