

# Caliber

Exterior

Cangini & Tucci

Cini & Nils

Prolight

Letroh

Panzeri

Platek

Ole

Side

**UnoNoveSette**

Ivela

Icone

Linea Zero

Milan

Quasar


Tunto

Knickboker

Studio Zaneen

Fambuena

An extensive range of in-grade luminaires offered in various diameters, lumen output, color temperatures and beam angles, to light up an exterior environment.

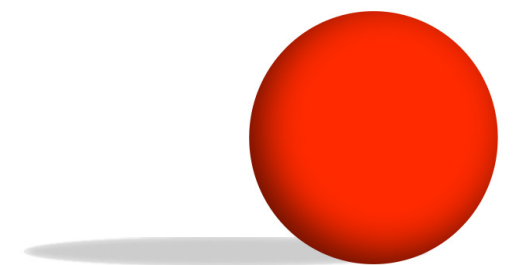

Small but mighty, a constellation of elegant light.




Caliber 25



Caliber 25 XS

Caliber is a large series of recessed lighting suitable for both in-ground (drive-over) and wall applications. Starting at a diameter of only 25mm, these compact spots are the perfect combination of optical excellence and complete resilience.

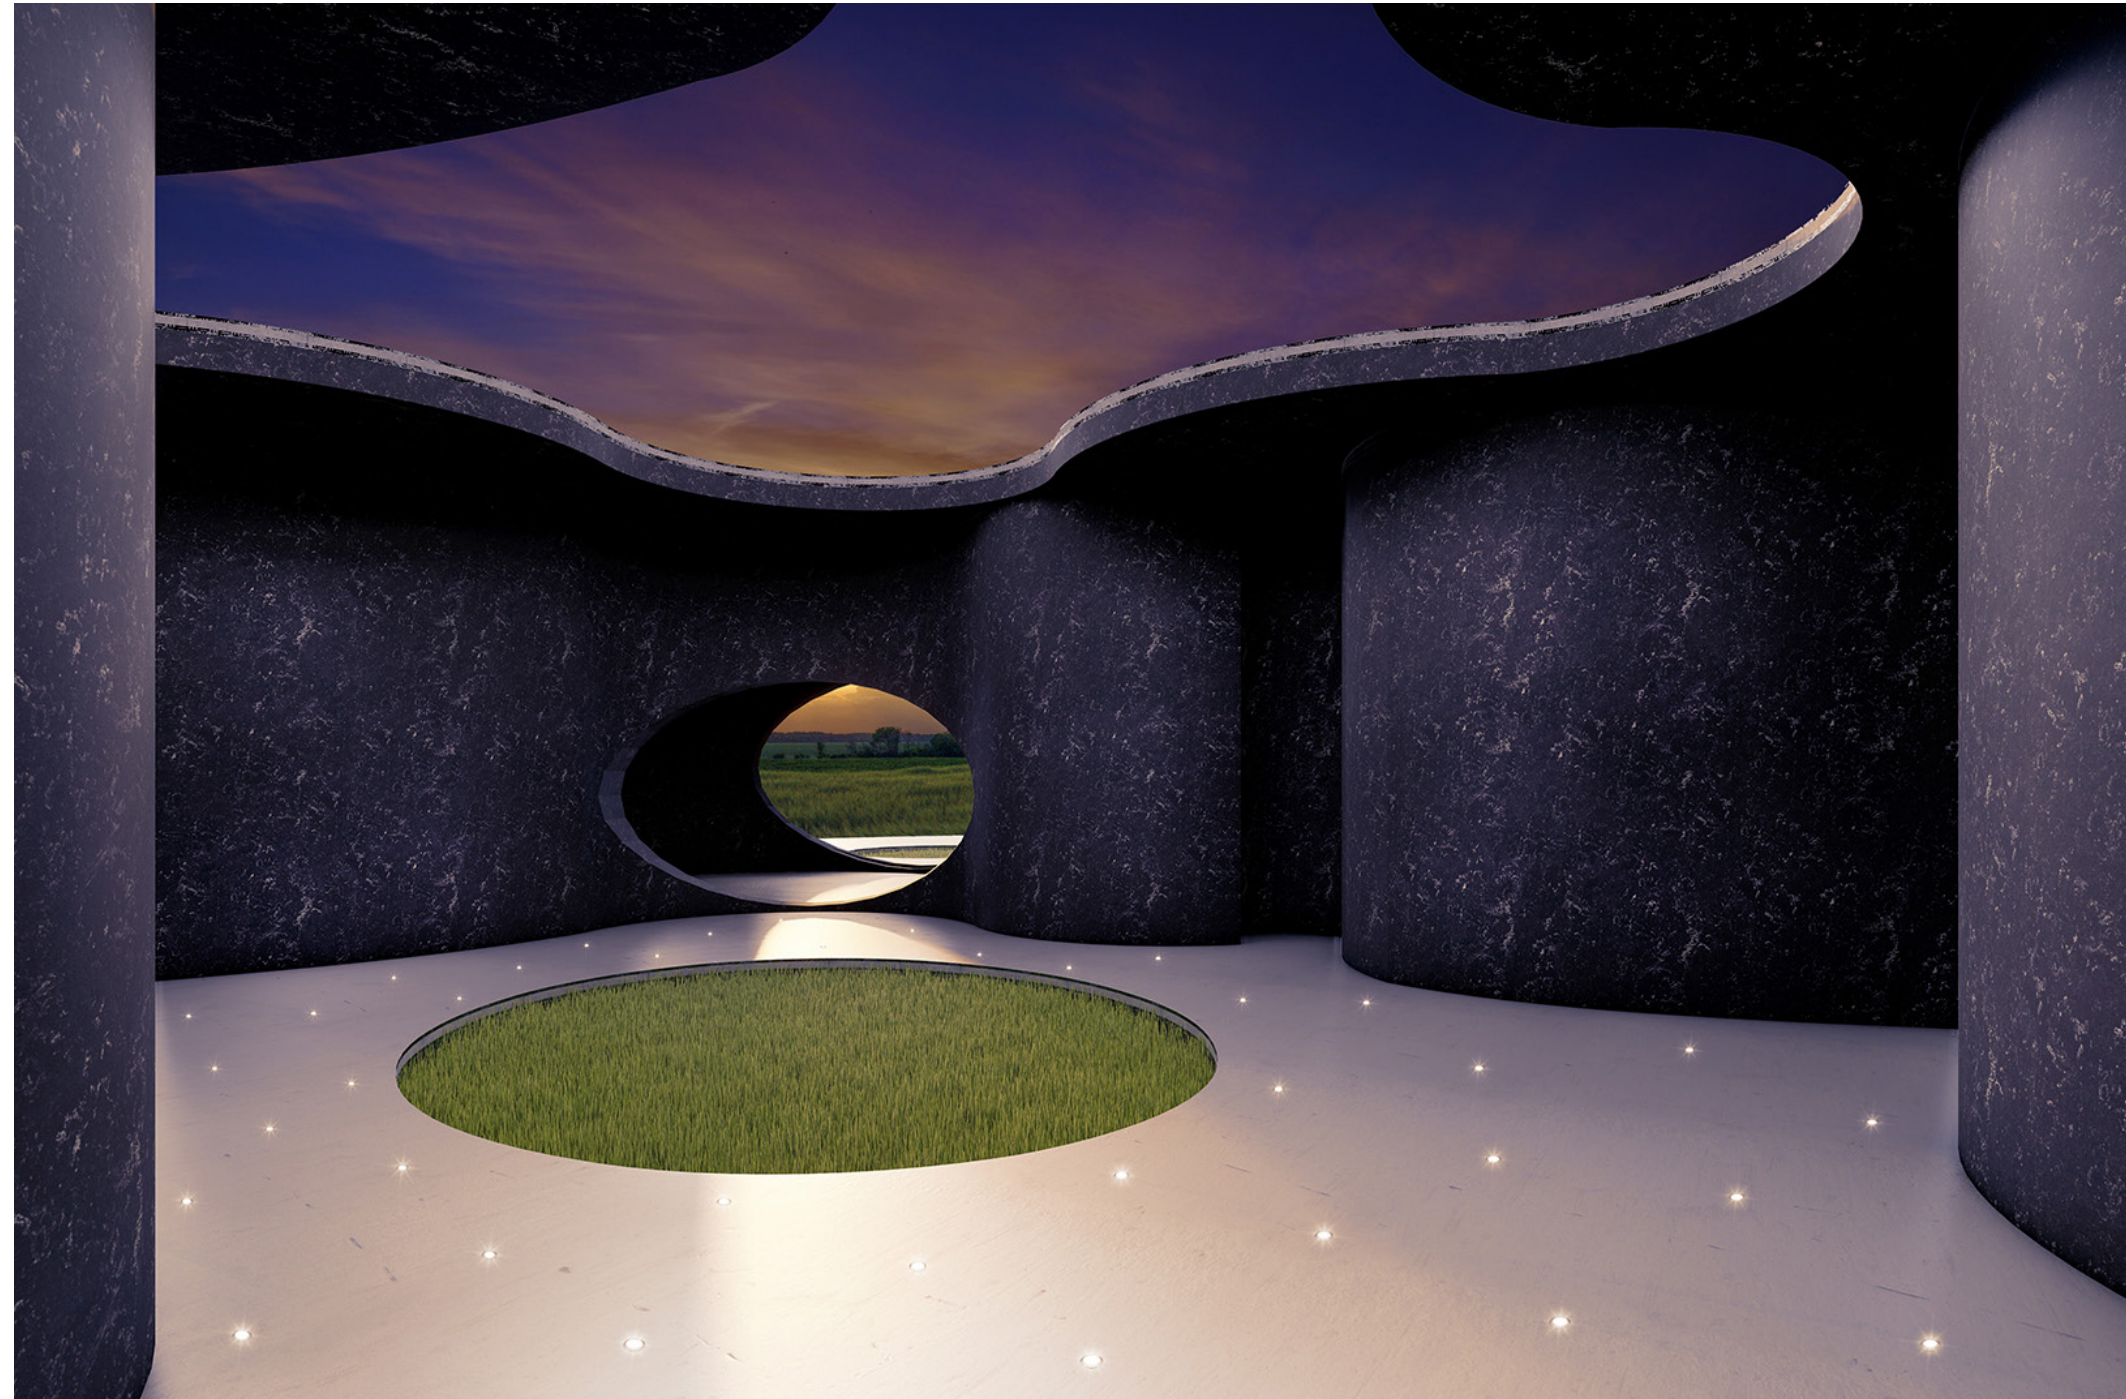



Caliber 52




For most of the Caliber family, choose among the aesthetic and functional stainless steel finish or go for a versatile and subtle look with aged brass.

**Illuminate with harmony, with finishes that excel in both appearance and resistance.**

# Enhance the details that make architecture spectacular.



Caliber 80

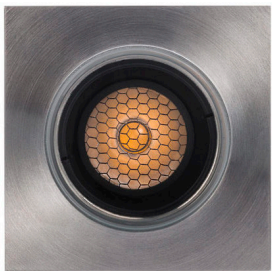

Caliber 80 Q

Caliber is available in multiple color temperatures, including RGBW, and offers a variety of beam angle choices: narrow, wide and diffuse options.



# Rhythmic and powerful lighting for large scale facades.



Caliber 120 D



Caliber 150



Caliber 120 D engine offers 360° rotation and up to 15° tilt to illuminate with precision, while the deep recessed LED of Caliber 150 provides excellent glare control, both being great choices for lighting columns and facades.



Light your way up and down with either delicate or spectacular effects.




Caliber Wall












Caliber Wall Q

The entire series features Unonovesette's Smart Shield System which provides complete protection to every component of the fixture and a risk-free installation.

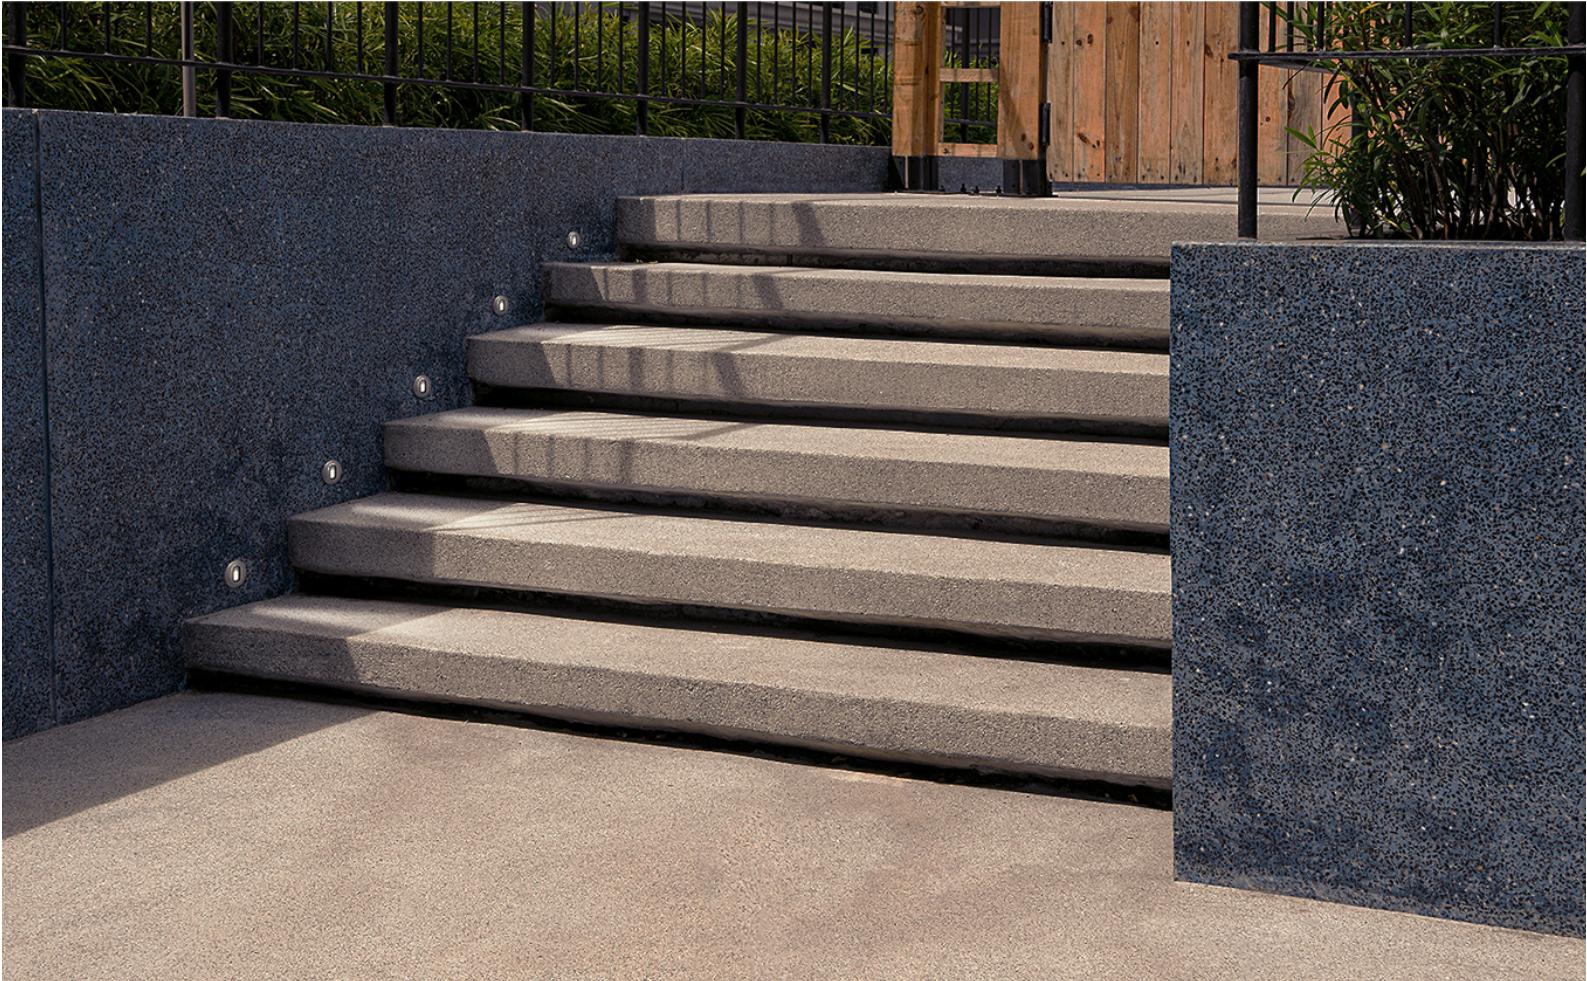



# Compare Caliber models



25

25 XS

52

80

80 Q

120 D

150

Wall

Wall Q

DIMENSIONS (mm)

Ø25x80mm

Ø25x37mm

Ø52x85mm

Ø80x96mm

□80x97.5mm

Ø120x106.5mm

Ø150x111mm

Ø52x71.5mm

□52x71.5mm

COLOR TEMPERATURE (K)

2200  
2700  
3000  
4000

2200  
2700  
3000  
4000

2200  
2700  
3000  
4000

2700  
3000  
4000  
RGBW

2700  
3000  
4000  
RGBW

2700  
3000  
4000  
RGBW

2700  
3000  
4000

2200  
2700  
3000  
4000

2200  
2700  
3000  
4000

WATTAGE (W)

2

1

2

5 - 9

5 - 9

5 - 8.5

13 - 22

2

2

MAX. DELIVERED LUMEN (lm)  
(at 3000K)

140

110

140

515 / 730

515 / 730

515 / 730

1418 / 2090

140

140

CRI

>90

>90

>90

>90

>90

>90

>92

>90

>90

FIXTURE FINISHES \*

SST

SST / ABA / ANA

SST / ASB

SST / ASB

SST

SST / ASB

SST / ASB

SST / ASB

SST / ASB

OPTIC

10° / 40° / DIF

10° / 40° / DIF

10° / 23° / 43° /  
10°x45° / DIF

10° / 30° / 50° /  
10°x45° / DIF  
RGBW: 35°

10° / 30° / 50° / DIF  
RGBW: 35°

10° / 35° / 50°  
RGBW: 35°

10° / 20° / 40° / 55° /  
10°x45°

10° / 40°

10° / 40°

### Notes

- The entire series is IP68 (not for permanent immersion) and IK08.
- Caliber 52 and Caliber 80 are available as a submersion solution, suitable for installation in fountains at a maximum level of 1m deep.

\* SST - Stainless Steel / ABA - Black Anodized / ANA - Natural Anodized / ASB - Aged Solid Brass

Some information presented in this table were simplified - contact your local representative for a complete report.



This product catalog has been provided by Zaneen.  
Contact your local representative, [zteam@zaneen.com](mailto:zteam@zaneen.com) or 1-800.388.3382