

APPLE MOOD MODULAR SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____



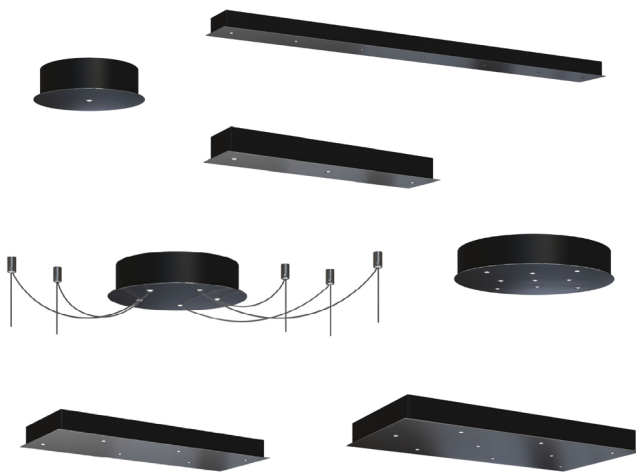
DESIGN | APPLE MOOD

APPLE MOOD is aptly inspired by the shape of an apple and its many symbolic meanings in an array of different cultures - immortality, eternal youth, fertility, love and beauty, and so on. Apple Mood is a design pendant light fixture that can be specified in various combinations and compositions. It is constructed of clear glass with the aluminum core available in polished aluminum, brass, copper, black, green and red. Apple Mood is a fantastic option for making a statement in your contemporary space, and would stand out in a residential staircase or above a dining room table.



Expand your design possibilities and mix compositions without the glass, leaving the aluminum core of the fixture exposed.

SYSTEM OVERVIEW




APPLE MOOD MODULAR SYSTEM SPECIFICATION SHEET

PROJECT _____
 TYPE _____
 NOTES _____
 QUANTITY _____
 DATE _____

SYSTEM GUIDE

To make your product selection and complete system specification, proceed with the following:
 review system options, create your system code in the field below and include your quantity.
 For the canopies/pendants, use the field beside each product name.
 Submit to quotes@zaneen.com to receive a formal BOM and finalized model numbers.



UPON REQUEST
 Additional Options _____
 Custom Canopy _____

EXAMPLE D10APMS-MOD-SYS-UNV-DN

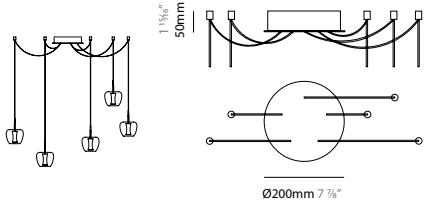
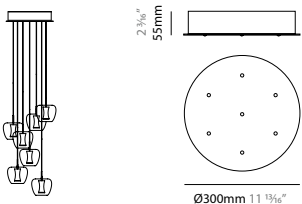
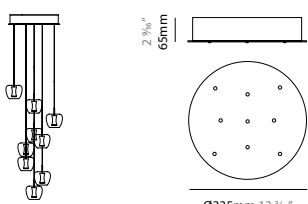
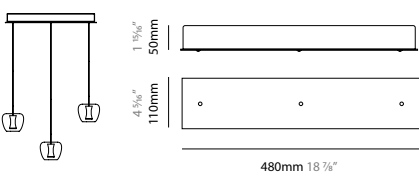
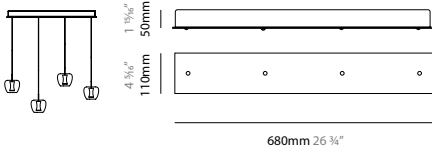
SYSTEM BUILD CODE: D10APMS-MOD-SYS- **qty**

ELECTRICAL	Voltage	Dimming
	UNV - 120/277V	DN - Non Dim DP - Phase Dim (Triac/ELV) DV - 0-10V (100-1%)

MODULES	CANOPY	
	ROUND RECESSED (1 HOLE)	D109094 qty
		Description Mount the Apple Mood with a hidden driver by using this chrome cable blocker.
ROUND (1 HOLE)	D109095 qty	
	Description Black canopy with chrome cover plate.	
ROUND (5 HOLES)	D109093 qty	
	Description Black canopy with chrome cover plate.	

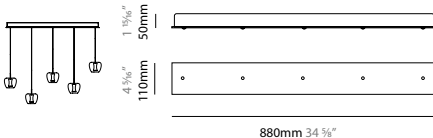
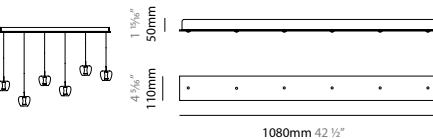
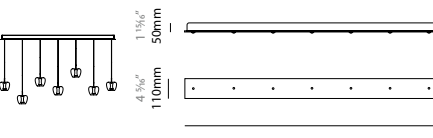
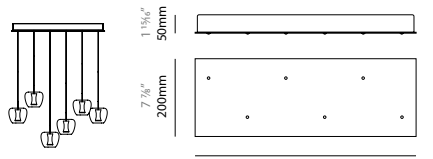
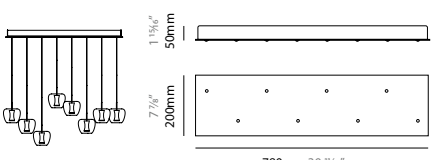
CANOPY

MODULES

<p>ROUND (5 HOLES SWAG)</p>  <p>1 1/8" 50mm</p> <p>Ø200mm 7 3/8"</p>	<p>D109104 qty</p> <p>Description</p> <p>Black canopy with chrome cover plate and five cable fixations.</p>
<p>ROUND (7 HOLES)</p>  <p>2 3/8" 55mm</p> <p>Ø300mm 11 1/8"</p>	<p>D109105 qty</p> <p>Description</p> <p>Black canopy with chrome cover plate.</p>
<p>ROUND (9 HOLES)</p>  <p>2 3/8" 65mm</p> <p>Ø335mm 13 3/8"</p>	<p>D109106 qty</p> <p>Description</p> <p>Black canopy with chrome cover plate.</p>
<p>RECTANGLE (3 HOLES)</p>  <p>1 1/8" 50mm</p> <p>4 3/8" 110mm</p> <p>480mm 18 7/8"</p>	<p>D109096 qty</p> <p>Description</p> <p>Black canopy with chrome cover plate.</p>
<p>RECTANGLE (4 HOLES)</p>  <p>1 1/8" 50mm</p> <p>4 3/8" 110mm</p> <p>680mm 26 3/4"</p>	<p>D109097 qty</p> <p>Description</p> <p>Black canopy with chrome cover plate.</p>

CANOPY

MODULES

<p>RECTANGLE (5 HOLES)</p>  <p>880mm 34 3/8"</p>	<p>D109098 qty</p> <p>Description</p> <p>Black canopy with chrome cover plate.</p>
<p>RECTANGLE (6 HOLES)</p>  <p>1080mm 42 1/2"</p>	<p>D109099 qty</p> <p>Description</p> <p>Black canopy with chrome cover plate.</p>
<p>RECTANGLE (7 HOLES)</p>  <p>1280mm 50 3/8"</p>	<p>D109100 qty</p> <p>Description</p> <p>Black canopy with chrome cover plate.</p>
<p>RECTANGLE (2x3 HOLES)</p>  <p>580mm 22 13/16"</p>	<p>D109101 qty</p> <p>Description</p> <p>Black canopy with chrome cover plate.</p>
<p>RECTANGLE (2x4 HOLES)</p>  <p>780mm 30 11/16"</p>	<p>D109102 qty</p> <p>Description</p> <p>Black canopy with chrome cover plate.</p>

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

MODULES		CANOPY																																				
PENDANTS		APPLE MOOD																																				
MODULES		<table border="1" style="width: 100%;"> <tr> <td style="width: 30%;">RECTANGLE (2x5 HOLES)</td> <td style="width: 10%;">D109103</td> <td style="width: 10%;"></td> <td style="width: 10%;"></td> <td style="width: 10%; text-align: right;">qty</td> </tr> <tr> <td colspan="5">Description</td> </tr> <tr> <td colspan="5">Black canopy with chrome cover plate.</td> </tr> </table>		RECTANGLE (2x5 HOLES)	D109103			qty	Description					Black canopy with chrome cover plate.																								
		RECTANGLE (2x5 HOLES)	D109103			qty																																
Description																																						
Black canopy with chrome cover plate.																																						
PENDANTS		<table border="1" style="width: 100%;"> <tr> <td colspan="2">APPLE MOOD Ø115</td> <td colspan="2">D101900-</td> <td style="text-align: right;">qty</td> </tr> <tr> <td colspan="2">Wattage: 6W</td> <td colspan="2">Dimming</td> <td colspan="1">Delivered Lumen (lm)</td> </tr> <tr> <td colspan="2" rowspan="2"> </td> <td colspan="2" rowspan="2"> DN - Non Dim DP - Phase Dim DV - 0-10V </td> <td colspan="1" rowspan="2"> Finish ◆ _____ (6 colors - choose 3 letter code below) <table style="display: flex; justify-content: space-around; font-size: small;"> <tr> <td>BLK</td> <td>BRA</td> <td>COP</td> <td>GRN</td> <td>PAL</td> <td>RED</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Black</td> <td>Brass</td> <td>Copper</td> <td>Green</td> <td>Polished Aluminum</td> <td>Red</td> </tr> </table> </td> <td colspan="1" rowspan="2" style="text-align: center;"> CRI: >90 2700K 200 </td> </tr> <tr> <td colspan="1"></td> </tr> </table>		APPLE MOOD Ø115		D101900-		qty	Wattage: 6W		Dimming		Delivered Lumen (lm)			DN - Non Dim DP - Phase Dim DV - 0-10V		Finish ◆ _____ (6 colors - choose 3 letter code below) <table style="display: flex; justify-content: space-around; font-size: small;"> <tr> <td>BLK</td> <td>BRA</td> <td>COP</td> <td>GRN</td> <td>PAL</td> <td>RED</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Black</td> <td>Brass</td> <td>Copper</td> <td>Green</td> <td>Polished Aluminum</td> <td>Red</td> </tr> </table>	BLK	BRA	COP	GRN	PAL	RED							Black	Brass	Copper	Green	Polished Aluminum	Red	CRI: >90 2700K 200	
		APPLE MOOD Ø115		D101900-		qty																																
Wattage: 6W		Dimming		Delivered Lumen (lm)																																		
		DN - Non Dim DP - Phase Dim DV - 0-10V		Finish ◆ _____ (6 colors - choose 3 letter code below) <table style="display: flex; justify-content: space-around; font-size: small;"> <tr> <td>BLK</td> <td>BRA</td> <td>COP</td> <td>GRN</td> <td>PAL</td> <td>RED</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Black</td> <td>Brass</td> <td>Copper</td> <td>Green</td> <td>Polished Aluminum</td> <td>Red</td> </tr> </table>	BLK	BRA	COP	GRN	PAL	RED							Black	Brass	Copper	Green	Polished Aluminum	Red	CRI: >90 2700K 200															
					BLK	BRA	COP	GRN	PAL	RED																												
Black	Brass	Copper	Green	Polished Aluminum	Red																																	

LEGEND

	floor-mounted		pivotable		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

APPLE MOOD MODULAR SYSTEM SPECIFICATION SHEET

PROJECT _____
TYPE _____
NOTES _____
QUANTITY _____
DATE _____

Insert custom drawing here or attach with additional pages

