

Flamingo

Exterior

Cangini & Tucci

Cini & Nils

Fambuena

Letroh

Panzeri

Platek

Ole

Side

UnoNoveSette

Aria

Icone

Linea Zero

Milan

Prolicht


Quasar

Tunto

Knickboker

Studio Zaneen

Platek



FLAMINGO collection

design by
Sara Moroni

Platek®

downlight wall bollard floor

DESIGN EXTERIOR LIGHTING



FLAMINGO floor



FLAMINGO bollard

DESIGN EXTERIOR LIGHTING

Flamingo is a family of products from minimal design in the emblem of the maximum flexibility. Sinuous but rigorous lines generate high performance of light distribution: wall, ceiling and floor lamps are available in the version


with long adjustable arms that reach and illuminate large portions of space. Flamingo thus creates scenographic effects that are always different both indoor and outdoor.

DESIGN EXTERIOR LIGHTING



FLAMINGO downlight

DESIGN EXTERIOR LIGHTING

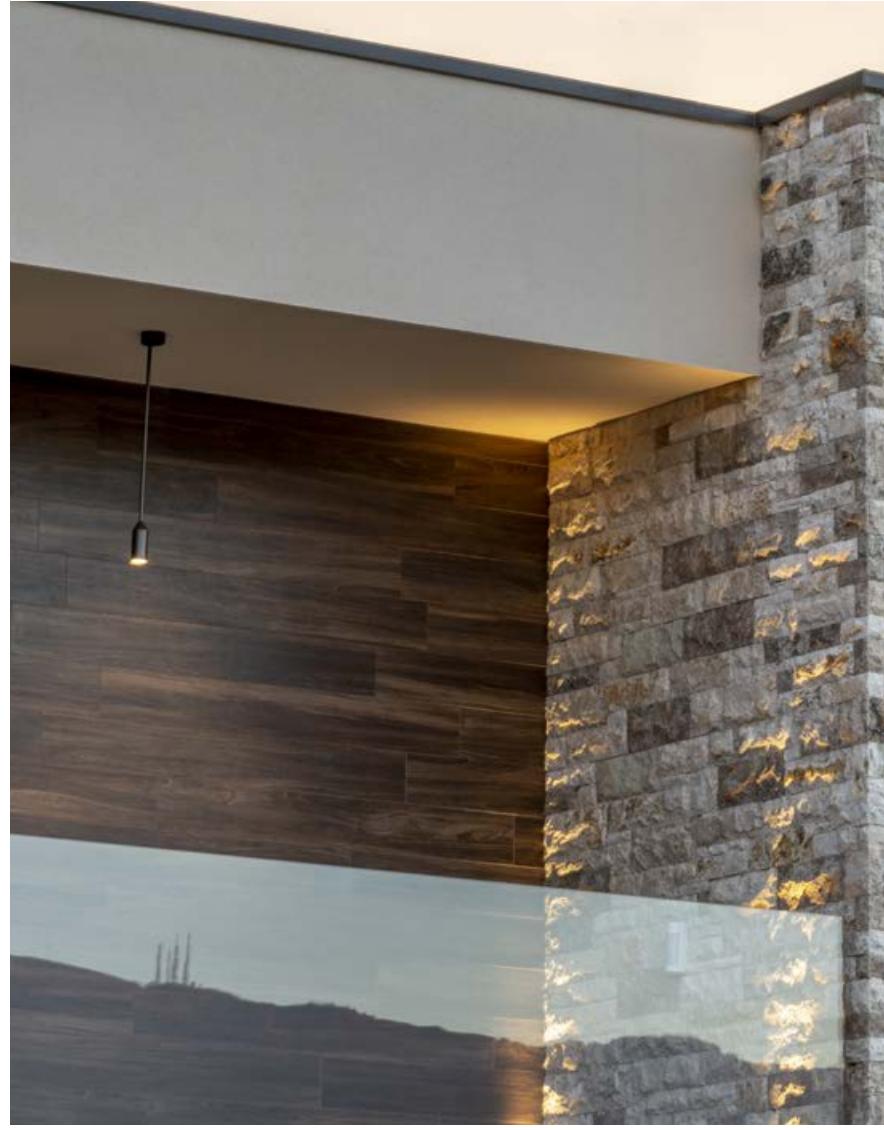

DESIGN EXTERIOR LIGHTING

FLAMINGO downlight

FLAMINGO downlight

DESIGN EXTERIOR LIGHTING



DESIGN EXTERIOR LIGHTING

DESIGN EXTERIOR LIGHTING

FLAMINGO downlight



DESIGN EXTERIOR LIGHTING

FLAMINGO wall



DESIGN EXTERIOR LIGHTING



FLAMINGO wall

DESIGN EXTERIOR LIGHTING





FLAMINGO applique

DESIGN EXTERIOR LIGHTING

DESIGN EXTERIOR LIGHTING

FLAMINGO applique




FLAMINGO applique



FLAMINGO bollard

DESIGN EXTERIOR LIGHTING

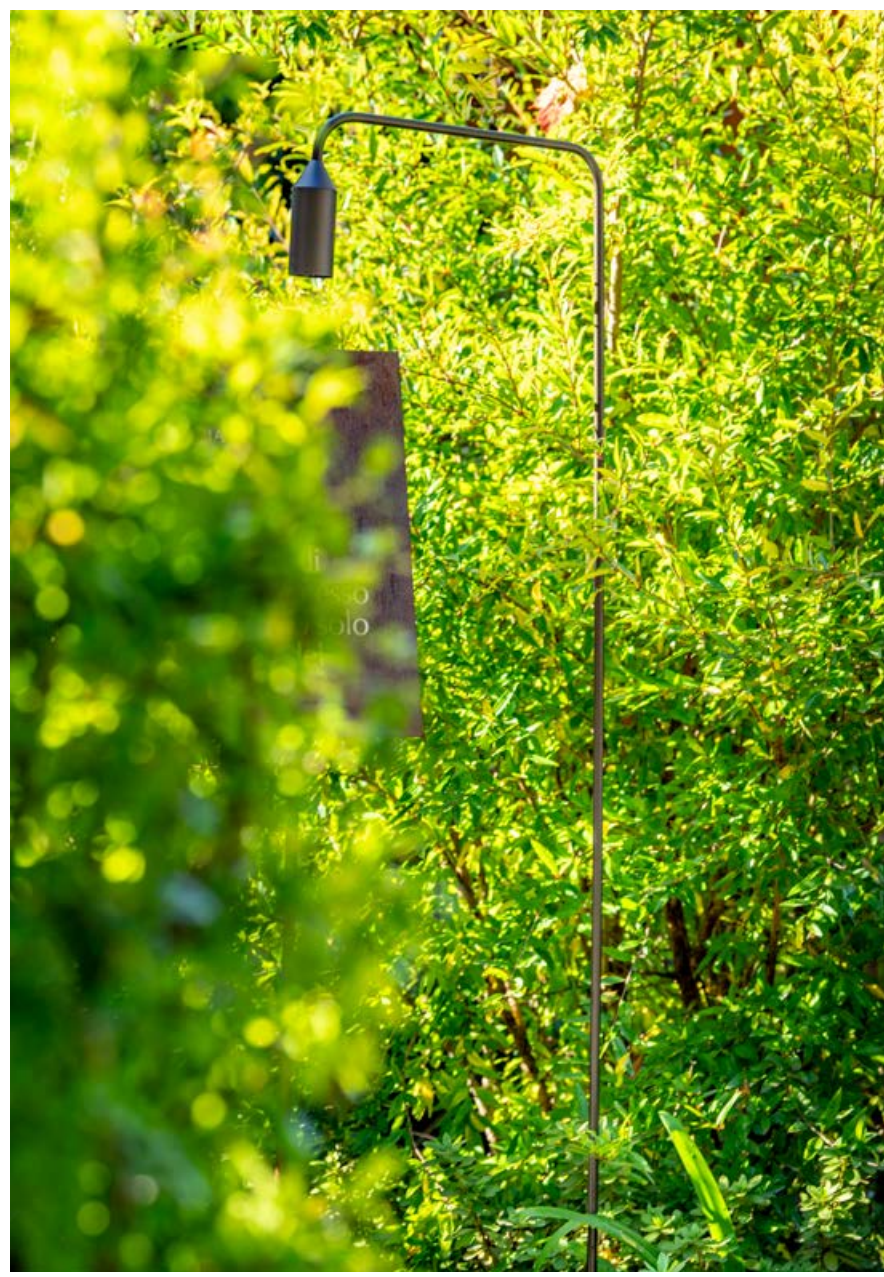

DESIGN EXTERIOR LIGHTING

FLAMINGO bollard



FLAMINGO floor

DESIGN EXTERIOR LIGHTING

DESIGN EXTERIOR LIGHTING

FLAMINGO floor



DESIGN EXTERIOR LIGHTING



FLAMINGO floor

DESIGN EXTERIOR LIGHTING

FLAMINGO floor



FLAMINGO floor



FLAMINGO collection

Lighting data


FLAMINGO downlight



IP65 . IK06

h. 170 mm | 6 11/16"
h. 800 mm | 31 1/2"


FLAMINGO wall

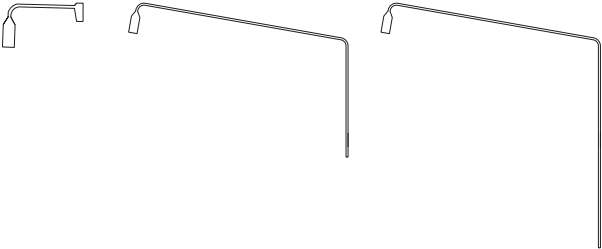

IP65 . IK06

h. 370 mm | 14 9/16"
h. 1400 mm | 55 1/8"
h. 1400 mm | 55 1/8" (extended)

FLAMINGO bollard




IP65 . IK06

h. 800 mm | 31 1/2"
h. 1500 mm | 59 1/16"
h. 1900 mm | 74 13/16"

IP68 connector included

FLAMINGO floor



IP65 . IK06

h. 1500 mm | 59 1/6"
h. 1900 mm | 74 13/16"

IP44 SCHUKO included

downlight / wall / bollard / floor

3000K CRI>80 120/277V
RIAC dimmable ⊕

3000K / 4000K 2700K
available on request



7.5W | 385 lm (*) 2 mm
methacrylate frosted diffuser

75° optic
680 cd/klm

standard finishes



.01 black



.09 bronze

