

FOLD MODULAR SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____




DESIGN | FOLD

FOLD is a concentric metal cylinder that perfectly integrates with its blown glass silhouette. The technical soul of the lighting source becomes an aesthetic element, while the behavior of the light inside the lamp is designed to deceive the human eye. Curves and transparencies are shaped by creating a connection between light and glass. Fold is available in a wide range of colored glass options. The system consists of a pendant lamp in two different size variants with the flexibility to be clustered in groups.



SYSTEM OVERVIEW

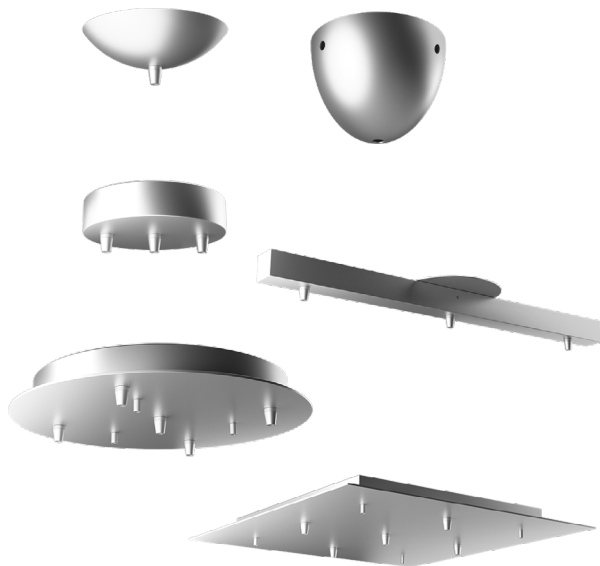


FOLD MODULAR SYSTEM SPECIFICATION SHEET

PROJECT _____
 TYPE _____
 NOTES _____
 QUANTITY _____
 DATE _____

SYSTEM GUIDE

To make your product selection and complete system specification, proceed with the following:
 review system options, create your system code in the field below and include your quantity.
 For the canopies/pendants, use the field beside each product name.
 Submit to quotes@zaneen.com to receive a formal BOM and finalized model numbers.



UPON REQUEST
 Additional Options _____
 _____ Cable Length
 _____ Custom Canopy

EXAMPLE D14FOLD-MOD-SYS-120-DN

SYSTEM BUILD CODE: D14FOLD-MOD-SYS- **qty**

ELECTRICAL	Voltage	Dimming
	120 - 120V 277 - 277V (Upon request)	DN - Non Dimming DP - Phase Dim (Triac/ELV) DV - 0-10V (100-1%) (Upon request)






CANOPY		BUILD CODE EXAMPLE: D149001-BLK	FINISHES OPTIONS: See page 6 for color options and use 3 digit letters to indicate your choices
MODULES	ROUND - 1 HOLE	D149001-	qty
		Finish ◆ _____ (6 colors)	
	ROUND - 3 HOLES	D149006-	qty
		Finish ◆ _____ (6 colors)	
	ROUND - 5 HOLES	D149007-	qty
		Finish ◆ _____ (6 colors)	

MODULES

CANOPY

FINISHES OPTIONS:

See page 6 for color options and use 3 digit letters to indicate your choices
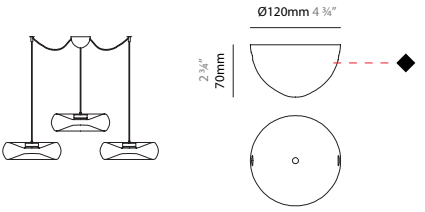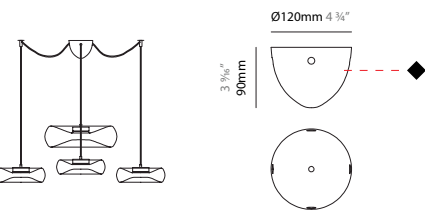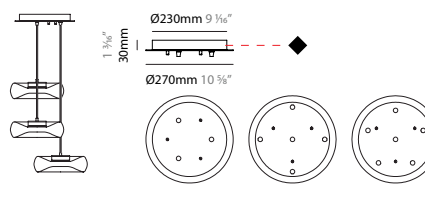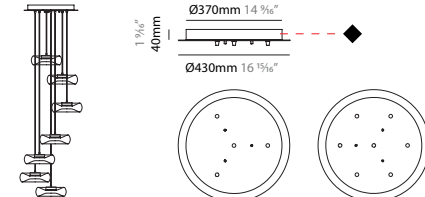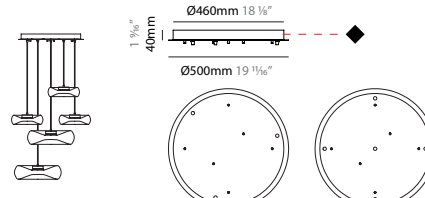
<p>ROUND - 2 EXTERNAL HOLES + 1 CENTRAL</p> 	<p>D149008- qty</p> <p>Finish</p> <p>◆ _____ (6 colors)</p>
<p>ROUND - 4 EXTERNAL HOLES + 1 CENTRAL</p> 	<p>D149009- qty</p> <p>Finish</p> <p>◆ _____ (6 colors)</p>
<p>ROUND - FOR 3/5/6 LIGHTS</p> 	<p>D149014- qty</p> <p>Finish</p> <p>◆ _____ (6 colors)</p>
<p>ROUND - FOR 3/4/5/6/7/8/9/10/11 LIGHTS</p> 	<p>D149015- qty</p> <p>Finish</p> <p>◆ _____ (6 colors)</p>
<p>ROUND - FOR 3/4/5 LIGHTS</p> 	<p>D149016- qty</p> <p>Finish</p> <p>◆ _____ (6 colors)</p>

MODULES

CANOPY

FINISHES OPTIONS:

See page 6 for color options and use 3 digit letters to indicate your choices

<p>SQUARE - FOR 5 LIGHTS - 300</p>	<p>D149017- qty</p> <p>Finish</p> <p>◆ _____</p> <p>(6 colors)</p>
<p>SQUARE - FOR 5 LIGHTS - 400</p>	<p>D149018- qty</p> <p>Finish</p> <p>◆ _____</p> <p>(6 colors)</p>
<p>LINEAR - FOR 2 LIGHTS</p>	<p>D149019- qty</p> <p>Finish</p> <p>◆ _____</p> <p>(6 colors)</p>
<p>LINEAR - FOR 3 LIGHTS</p>	<p>D149020- qty</p> <p>Finish</p> <p>◆ _____</p> <p>(6 colors)</p>
<p>LINEAR - FOR 3/5 LIGHTS</p>	<p>D149021- qty</p> <p>Finish</p> <p>◆ _____</p> <p>(6 colors)</p>

FOLD MODULAR SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____


PENDANTS	FOLD		FINISHES OPTIONS: See page 6 for color options and use 3 digit letters to indicate your choices		
		FOLD Ø240	D141026-		
	Wattage: 17.4W	Dimming	CCT - >95 CRI	Finish	Delivered Lumen (lm)
		DN - Non Dim DP - Phase Dim	27K - 2700K 30K - 3000K	◆ _____ (2 colors) ▲ _____ (9 colors)	2370
	FOLD Ø360	D141027-			qty
	Wattage: 17.4W	Dimming	CCT - >95 CRI	Finish	Delivered Lumen (lm)
		DN - Non Dim DP - Phase Dim	27K - 2700K 30K - 3000K	◆ _____ (2 colors) ▲ _____ (9 colors)	2370

ACCESSORIES	WALL STUD CABLE SPACER		CABLE SPACER	
		D149012-	qty	D149013-
	Finish		Finish	
	◆ _____ (6 colors)		◆ _____ (6 colors)	


PROJECT _____
TYPE _____
NOTES _____
QUANTITY _____
DATE _____

FINISH COLORS - CANOPY ◆

Black - **BLK**



Brushed Steel - **BST**



Chrome - **CHR**




Gold Leaf - **GLF**



Silver Leaf - **SLF**




White - **WHI**



FINISH COLORS - PENDANT HOLDER ◆

Black - **BLK**



Chrome - **CHR**



FINISH COLORS - PENDANT GLASS ▲

Amber - **AMB**



Green - **GRN**



Pink - **PNK**



Ruby - **RUB**



Sky Blue - **SKB**



Smoke - **SMK**



Satin White - **SWH**








































































Tobacco - **TOB**













Transparent - **TRA**













LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimnable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

PROJECT _____
TYPE _____
NOTES _____
QUANTITY _____
DATE _____

Insert custom drawing here or attach with additional pages

