



## CLICKTRACK 30 SURFACE SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____




### ARCHITECTURAL | CLICKTRACK

The great flexibility of the CLICKTRACK 30 system ensures perfectly coordinated lighting concepts, for living areas, in retail, for hotels or in public buildings. The inside surfaces of the profile, equipped with a 48 V power supply, are always painted black, while the outside is available in a choice of 28 colors to complement any interior design concept. All spots are mounted simply by clicking them into the track, without the need for tools.



The cable of the pendants variants can be flexibly shortened or extended at any time. The multiple inserts options for either diffused or targeted light can perfectly match diverse project requirements.

### SYSTEM PROFILE

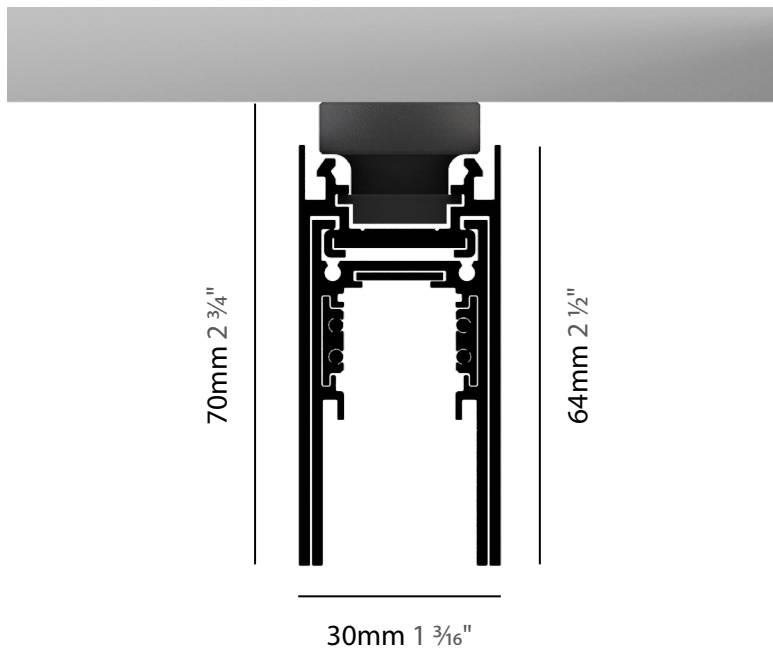

## CLICKTRACK 30 SURFACE SYSTEM SPECIFICATION SHEET

PROJECT \_\_\_\_\_  
 TYPE \_\_\_\_\_  
 NOTES \_\_\_\_\_  
 QUANTITY \_\_\_\_\_  
 DATE \_\_\_\_\_

### SYSTEM GUIDE

To make your product selection and complete system specification, proceed with the following: review system options, create your system code in the field below and include your quantity. For the inserts and components, use the field beside each product name. Submit to quotes@zaneen.com to receive a formal BOM and finalized model numbers.


UPON REQUEST  
 Additional Options \_\_\_\_\_  
 \_\_\_\_\_ Color Temperature  
 \_\_\_\_\_ RGB-W / Tunable  
 \_\_\_\_\_ Lumen Outputs  
 \_\_\_\_\_ Beam Angle  
 \_\_\_\_\_ Special LED  
 \_\_\_\_\_ CRI



EXAMPLE A3CLK30-SUR-SYS-UNV-DN-1'S-01-01

### SYSTEM BUILD CODE: A3CLK30-SUR-SYS- qty

<b>ELECTRICAL</b>	Voltage	Dimming	Circuit
	<b>UNV</b> - 120/277V	<b>DN</b> - Non Dim	<b>EMCIR</b> - Emergency Circuit
	<b>120</b> - 120V	<b>DP</b> - Phase Dim (Triac/ELV)	
	<b>347</b> - 347V	<b>DV</b> - 0-10V (100-1%)	
	<b>DD</b> - DALI (100-1%)		


<b>LAYOUT</b>	Fixture Head Spacing	Run Shapes	System Finishes
	<b>1'</b> - on center <b>2'</b> - on center <b>4'</b> - on center <b>CUS (XX)</b> - Custom <small>Spotlights - Minimum distance of 7"</small>	<b>S</b> _____ ' Straight <b>L</b> _____ 'x _____ ' <b>U</b> _____ 'x _____ 'x _____ ' <b>R</b> _____ 'x _____ ' Rectangle	Profile <b>◆</b> _____ (28 colors) 

### CENTRIQ

INSERT BUILD CODE EXAMPLE:  
A3T078-DN-27K-01-01-24

#### FINISHES OPTIONS:


See page 12 for color options and use 2 digit numbers to indicate your choices

<b>INSERTS</b>	CENTRIQ Ø30	A3T078-	qty																	
	Wattage: 4.3W 	Dimming <b>DN</b> - Non Dim <b>DP</b> - Phase Dim <b>DV</b> - 0-10V	CCT - 90 CRI <b>27K</b> - 2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	Finish <b>◆</b> _____ <b>▲</b> _____ (28 colors)	Reflector <b>24</b> - 24° <b>32</b> - 32°	Delivered Lumen (lm) <table border="1"> <tr> <th>CCT</th> <th>24°</th> <th>32°</th> </tr> <tr> <td>2700K</td> <td>257</td> <td>230</td> </tr> <tr> <td>3000K</td> <td>272</td> <td>244</td> </tr> <tr> <td>3500K</td> <td>289</td> <td>259</td> </tr> <tr> <td>4000K</td> <td>295</td> <td>264</td> </tr> </table>	CCT	24°	32°	2700K	257	230	3000K	272	244	3500K	289	259	4000K	295
CCT	24°	32°																		
2700K	257	230																		
3000K	272	244																		
3500K	289	259																		
4000K	295	264																		

### CENTRIQ Ø40 SUPERSPOT

A3T079-

qty

<b>INSERTS</b>	CENTRIQ Ø40 SUPERSPOT	A3T079-	Delivered Lumen (lm)											
	Wattage: 6.3W 	Dimming <b>DN</b> - Non Dim <b>DP</b> - Phase Dim <b>DV</b> - 0-10V	CCT - 90 CRI <b>27K</b> - 2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	Finish <b>◆</b> _____ <b>▲</b> _____ (28 colors)	<table border="1"> <tr> <th>CCT</th> <th>12°</th> </tr> <tr> <td>2700K</td> <td>368</td> </tr> <tr> <td>3000K</td> <td>389</td> </tr> <tr> <td>3500K</td> <td>414</td> </tr> <tr> <td>4000K</td> <td>422</td> </tr> </table>	CCT	12°	2700K	368	3000K	389	3500K	414	4000K
CCT	12°													
2700K	368													
3000K	389													
3500K	414													
4000K	422													

## CLICKTRACK 30 SURFACE SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS

### CENTRIQ

**FINISHES OPTIONS:**

See page 12 for color options and use 2 digit numbers to indicate your choices

CENTRIQ Ø40	A3T080-				qty						
	Wattage: 6.5W	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)					
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	◆ ____ ▲ ____ (28 colors)	<b>22</b> - 22°  <b>30</b> - 30°  <b>34</b> - 34°  <b>38</b> - 38°  <b>48</b> - 48°	<b>CCT</b>	<b>22°</b>	<b>30°</b>	<b>34°</b>	<b>38°</b>	<b>48°</b>	
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K			2700K	489	471	357	452	444	
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K			3000K	512	493	374	472	465	
		<b>40K</b> - 4000K			3500K	564	544	412	520	513	
					4000K	575	555	420	531	523	

CENTRIQ Ø55 SUPERSPOT	A3T081-				qty	
Wattage: 9.3W	Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)		
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	◆ ____ ▲ ____ (28 colors)	<b>CCT</b>	<b>8°</b>	
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K		2700K	477	
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K		3000K	505	
		<b>40K</b> - 4000K		3500K	536	
				4000K	547	

CENTRIQ Ø55	A3T082-				qty						
Wattage: 11.5W	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)						
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	◆ ____ ▲ ____ (28 colors)	<b>18</b> - 18°  <b>26</b> - 26°  <b>34</b> - 34°  <b>36</b> - 36°  <b>52</b> - 52°	<b>CCT</b>	<b>18°</b>	<b>26°</b>	<b>34°</b>	<b>36°</b>	<b>52°</b>	
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K			2700K	750	643	772	804	818	
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K			3000K	784	673	807	841	856	
		<b>40K</b> - 4000K			3500K	815	700	839	874	890	
					4000K	832	714	856	892	908	

### HANGOVER (fabric cable)

Ø40 H:150	A3T129-				qty				
Wattage: 9.8W	Dimming	CCT - 90 CRI	Finish	Reflector	Shine Ring	Cable (Color/Length)	Delivered Lumen (lm)		
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	◆ ____ ▲ ____ (28 colors)	<b>40</b> - 40°  <b>52</b> - 52°	 (6 colors) No shine ring: indicate with <b>00</b>	 (2 digit number below) Color      2000m    6000m White <b>21</b> <b>61</b> Black <b>22</b> <b>62</b> Orange <b>23</b> <b>63</b> Red <b>24</b> <b>64</b>	<b>CCT</b>	<b>40°</b>	<b>52°</b>
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K					2700K	694	684
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K					3000K	726	716
		<b>40K</b> - 4000K					3500K	753	742
							4000K	770	759

## CLICKTRACK 30 SURFACE SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

### HANGOVER (fabric cable)

#### FINISHES OPTIONS:

See page 12 for color options and use 2 digit numbers to indicate your choices

INSERTS

Ø40 H:300	A3T130-							qty				
	Wattage: 11.5W	Dimming	CCT - 90 CRI	Finish	Reflector	Shine Ring	Cable (Color/Length)	Delivered Lumen (lm)				
		DN - Non Dim	27K -2700K	◆ _____	40 - 40°	 (6 colors) No shine ring: indicate with 00	T _____ (2 digit number below)	CCT	40°	52°		
DP - Phase Dim		30K - 3000K	▲ _____	52 - 52°	2700K			694	684			
DV - 0-10V		35K - 3500K	(28 colors)		Color			2000m	6000m	3000K	726	716
		40K - 4000K			White			21	61	3500K	753	742
							Black	22	62	4000K	770	759
							Orange	23	63			
							Red	24	64			

Ø40 H:450	A3T131-							qty				
	Wattage: 11.5W	Dimming	CCT - 90 CRI	Finish	Reflector	Shine Ring	Cable (Color/Length)	Delivered Lumen (lm)				
		DN - Non Dim	27K -2700K	◆ _____	40 - 40°	 (6 colors) No shine ring: indicate with 00	T _____ (2 digit number below)	CCT	40°	52°		
DP - Phase Dim		30K - 3000K	▲ _____	52 - 52°	2700K			694	684			
DV - 0-10V		35K - 3500K	(28 colors)		Color			2000m	6000m	3000K	726	716
		40K - 4000K			White			21	61	3500K	753	742
							Black	22	62	4000K	770	759
							Orange	23	63			
							Red	24	64			

Ø75 H:150	A3T135-							qty					
	Wattage: 9.8W	Dimming	CCT - 90 CRI	Finish	Reflector	Shine Ring	Cable (Color/Length)	Delivered Lumen (lm)					
		DN - Non Dim	27K -2700K	◆ _____	18 - 18°	 (6 colors) No shine ring: indicate with 00	T _____ (2 digit number below)	CCT	18°	36°	56°		
DP - Phase Dim		30K - 3000K	▲ _____	36 - 36°	2700K			857	855	851			
DV - 0-10V		35K - 3500K	(28 colors)	56 - 56°	Color			2000m	6000m	3000K	896	894	890
		40K - 4000K			White			21	61	3500K	930	927	923
							Black	22	62	4000K	951	948	944
							Orange	23	63				
							Red	24	64				

Ø75 H:150 DIR/IND	A3T136-							qty						
	Wattage: 19.5W	Dimming	CCT - Direct	CCT - Indirect	Finish	Reflector	Shine Ring	Cable (Color/Length)	Delivered Lumen (lm)					
		DN - Non Dim	27K -2700K	27K -2700K	◆ _____	18 - 18°	 (6 colors) No shine ring: indicate with 00	T _____ (2 digit number below)	CCT	18°	36°	56°		
DP - Phase Dim		30K - 3000K	30K - 3000K	▲ _____	36 - 36°	27K/27K			1696	1692	1690			
DV - 0-10V		35K - 3500K	40K - 4000K	(28 colors)	56 - 56°	Color			2000m	6000m	30K/30K	1771	1768	1765
		40K - 4000K				White			21	61	35K/30K	1798	1795	1792
							Black	22	62	40K/40K	1833	1829	1826	
							Orange	23	63					
							Red	24	64					

## CLICKTRACK 30 SURFACE SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS

### HANGOVER (fabric cable)

**FINISHES OPTIONS:**

See page 12 for color options and use 2 digit numbers to indicate your choices

Ø75 H:300	A3T137-						qty					
	Wattage: 9.8W	Dimming	CCT - 90 CRI	Finish	Reflector	Shine Ring	Cable (Color/Length)		Delivered Lumen (lm)			
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	◆ _____	<b>18</b> - 18°					CCT	18°	36°	56°
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K	▲ _____	<b>36</b> - 36°					2700K	857	855	851
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K	(28 colors)	<b>56</b> - 56°					3000K	896	894	890
		<b>40K</b> - 4000K							3500K	930	927	923
									4000K	951	948	944

Ø75 H:300 DIR/IND	A3T138-				qty								
	Wattage: 19.5W	Dimming	CCT - Direct	CCT - Indirect	Finish	Reflector	Shine Ring	Cable (Color/Length)		Delivered Lumen (lm)			
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	<b>27K</b> -2700K	◆ _____	<b>18</b> - 18°					CCT	18°	36°	56°
	<b>DP</b> - Phase Dim	<b>30K</b> -3000K	<b>30K</b> -3000K	▲ _____	<b>36</b> - 36°					27K/27K	1696	1692	1690
	<b>DV</b> - 0-10V	<b>35K</b> -3500K	<b>40K</b> -4000K	(28 colors)	<b>56</b> - 56°					30K/30K	1771	1768	1765
		<b>40K</b> -4000K								35K/30K	1798	1795	1792
										40K/40K	1833	1829	1826

### HANGOVER PLUG (wired cable)

Ø28 H:150	A3T120-						qty					
	Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Reflector	Shine Ring	Cable (Color/Length)		Delivered Lumen (lm)			
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	◆ _____	<b>20</b> - 20°					CCT	20°	26°	56°
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K	▲ _____	<b>26</b> - 26°					2700K	403	397	381
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K	(28 colors)	<b>56</b> - 56°					3000K	427	420	404
		<b>40K</b> - 4000K							3500K	451	443	426
									4000K	463	455	438

Ø28 H:300	A3T121-						qty					
	Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Reflector	Shine Ring	Cable (Color/Length)		Delivered Lumen (lm)			
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	◆ _____	<b>20</b> - 20°					CCT	20°	26°	56°
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K	▲ _____	<b>26</b> - 26°					2700K	403	397	381
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K	(28 colors)	<b>56</b> - 56°					3000K	427	420	404
		<b>40K</b> - 4000K							3500K	451	443	426
									4000K	463	455	438

## CLICKTRACK 30 SURFACE SYSTEM SPECIFICATION SHEET

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

INSERTS

### HANGOVER PLUG (wired cable)

**FINISHES OPTIONS:**

See page 12 for color options and use 2 digit numbers to indicate your choices

Ø28 H:450	A3T122-							qty			
Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Reflector	Shine Ring	Cable (Color/Length)	Delivered Lumen (lm)				
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	◆ ___	<b>20</b> - 20°	○ ___	T ___ (2 digit number below) Color    2000m    4000m Black <b>01</b> <b>02</b> White <b>03</b> <b>04</b> Orange <b>05</b> <b>06</b> Red <b>07</b> <b>08</b> Green <b>09</b> <b>10</b>	CCT	20°	26°	56°	
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K	▲ ___	<b>26</b> - 26°	(6 colors)		2700K	403	397	381	
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K	(28 colors)	<b>56</b> - 56°	No shine ring: indicate with <b>00</b>		3000K	427	420	404	
		<b>40K</b> - 4000K					3500K	451	443	426	
							4000K	463	455	438	
Ø40 H:150	A3T132-							qty			
Wattage: 9.8W	Dimming	CCT - 90 CRI	Finish	Reflector	Shine Ring	Cable (Color/Length)	Delivered Lumen (lm)				
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	◆ ___	<b>40</b> - 40°	○ ___	T ___ (2 digit number below) Color    2000m    4000m Black <b>01</b> <b>02</b> White <b>03</b> <b>04</b> Orange <b>05</b> <b>06</b> Red <b>07</b> <b>08</b> Green <b>09</b> <b>10</b>	CCT	40°	52°		
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K	▲ ___	<b>52</b> - 52°	(6 colors)		2700K	694	684		
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K	(28 colors)		No shine ring: indicate with <b>00</b>		3000K	726	716		
		<b>40K</b> - 4000K					3500K	753	742		
							4000K	770	759		
Ø40 H:300	A3T133-							qty			
Wattage: 9.8W	Dimming	CCT - 90 CRI	Finish	Reflector	Shine Ring	Cable (Color/Length)	Delivered Lumen (lm)				
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	◆ ___	<b>40</b> - 40°	○ ___	T ___ (2 digit number below) Color    2000m    4000m Black <b>01</b> <b>02</b> White <b>03</b> <b>04</b> Orange <b>05</b> <b>06</b> Red <b>07</b> <b>08</b> Green <b>09</b> <b>10</b>	CCT	40°	52°		
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K	▲ ___	<b>52</b> - 52°	(6 colors)		2700K	694	684		
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K	(28 colors)		No shine ring: indicate with <b>00</b>		3000K	726	716		
		<b>40K</b> - 4000K					3500K	753	742		
							4000K	770	759		
Ø40 H:450	A3T134-							qty			
Wattage: 9.8W	Dimming	CCT - 90 CRI	Finish	Reflector	Shine Ring	Cable (Color/Length)	Delivered Lumen (lm)				
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	◆ ___	<b>40</b> - 40°	○ ___	T ___ (2 digit number below) Color    2000m    4000m Black <b>01</b> <b>02</b> White <b>03</b> <b>04</b> Orange <b>05</b> <b>06</b> Red <b>07</b> <b>08</b> Green <b>09</b> <b>10</b>	CCT	40°	52°		
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K	▲ ___	<b>52</b> - 52°	(6 colors)		2700K	694	684		
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K	(28 colors)		No shine ring: indicate with <b>00</b>		3000K	726	716		
		<b>40K</b> - 4000K					3500K	753	742		
							4000K	770	759		

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

### HANGOVER PLUG (wired cable)

#### FINISHES OPTIONS:

See page 12 for color options and use 2 digit numbers to indicate your choices

INSERTS

Ø75 H:150	A3T139-						qty					
	Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Reflector	Shine Ring	Cable (Color/Length)		Delivered Lumen (lm)			
		<b>DN</b> - Non Dim <b>DP</b> - Phase Dim <b>DV</b> - 0-10V	<b>27K</b> -2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	◆ ____ ▲ ____ (28 colors)	<b>6</b> - 6° <b>22</b> - 22° <b>38</b> - 38°	○ ____ (6 colors) No shine ring: indicate with <b>00</b>	T ____ (2 digit number below)	CCT	6°	22°	38°	
Color    2000m    4000m		2700K	389	335	371							
Black <b>01</b> <b>02</b> White <b>03</b> <b>04</b> Orange <b>05</b> <b>06</b> Red <b>07</b> <b>08</b> Green <b>09</b> <b>10</b>		3000K	412	355	393	3500K	435	375	415	4000K	447	385

Ø75 H:150 DIR/IND	A3T140-						qty						
	Wattage: 9.6W	Dimming	CCT - Direct	CCT - Indirect	Finish	Reflector	Shine Ring	Cable (Color/Length)		Delivered Lumen (lm)			
		<b>DN</b> - Non Dim <b>DP</b> - Phase Dim <b>DV</b> - 0-10V	<b>27K</b> -2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	<b>27K</b> -2700K <b>30K</b> - 3000K <b>40K</b> - 4000K	◆ ____ ▲ ____ (28 colors)	<b>6</b> - 6° <b>22</b> - 22° <b>38</b> - 38°	○ ____ (6 colors) No shine ring: indicate with <b>00</b>	T ____ (2 digit number below)	CCT	6°	22°	38°	
Color    2000m    4000m		27K/27K	712	656	691	30K/30K	750	690	728	35K/30K	770	709	748
Black <b>01</b> <b>02</b> White <b>03</b> <b>04</b> Orange <b>05</b> <b>06</b> Red <b>07</b> <b>08</b> Green <b>09</b> <b>10</b>		40K/40K	793	730	770								

ACCESSORY

INDIRECT DIFFUSER	A380106-						qty			
	Finish						Indirect diffuser accessory for Hangover and Hangover Plug Ø75mm.			
	____ (5 colors - choose 3 letter code below)									
	Yellow - <b>YEL</b> 	Orange - <b>ORA</b> 	Red - <b>RED</b> 	Blue - <b>BLU</b> 	Green - <b>GRN</b> 					

### HANGOVER PLUG MICRO-DOT

Ø28 H:150	A3T117-						qty						
	Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Reflector	Shine Ring	Cable (Color/Length)		Delivered Lumen (lm)				
		<b>DN</b> - Non Dim <b>DP</b> - Phase Dim <b>DV</b> - 0-10V	<b>27K</b> -2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	◆ ____ ▲ ____ (28 colors)	<b>32</b> - 32° <b>58</b> - 58°	○ ____	T ____ (2 digit number below)	CCT	32°	58°			
Color    2000m    4000m		2700K	283	310	3000K	300	328	3500K	317	347	4000K	325	356
Black <b>01</b> <b>02</b> White <b>03</b> <b>04</b> Orange <b>05</b> <b>06</b> Red <b>07</b> <b>08</b> Green <b>09</b> <b>10</b>													

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS

### HANGOVER PLUG MICRO-DOT

**FINISHES OPTIONS:**

See page 12 for color options and use 2 digit numbers to indicate your choices

Ø28 H:300	A3T118-			qty					
	Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Reflector	Cable (Color/Length)	Delivered Lumen (lm)		
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	◆ ___	<b>32</b> - 32°	T ___ (2 digit number below) Color    2000m   4000m Black <b>01</b> <b>02</b> White <b>03</b> <b>04</b> Orange <b>05</b> <b>06</b> Red <b>07</b> <b>08</b> Green <b>09</b> <b>10</b>	Delivered Lumen (lm)	CCT	32°	58°
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K	▲ ___	<b>58</b> - 58°		2700K	283	310	
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K	(28 colors)			3000K	300	328	
		<b>40K</b> - 4000K				3500K	317	347	
						4000K	325	356	

Ø28 H:450	A3T119-			qty					
	Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Reflector	Cable (Color/Length)	Delivered Lumen (lm)		
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	◆ ___	<b>32</b> - 32°	T ___ (2 digit number below) Color    2000m   4000m Black <b>01</b> <b>02</b> White <b>03</b> <b>04</b> Orange <b>05</b> <b>06</b> Red <b>07</b> <b>08</b> Green <b>09</b> <b>10</b>	Delivered Lumen (lm)	CCT	32°	58°
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K	▲ ___	<b>58</b> - 58°		2700K	283	310	
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K	(28 colors)			3000K	300	328	
		<b>40K</b> - 4000K				3500K	317	347	
						4000K	325	356	

### LEDLINE

LEDLINE 620	A3T086-		qty				
	Wattage: 6.6W/7.9W(DV)	Dimming	CCT - 90 CRI		Delivered Lumen (lm)		
	<b>DN</b> - Non Dim	<b>27K</b> -2700K			CCT	Non-Dim	0-10V
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K			2700K	358	537
	<b>DV</b> - 0-10V	<b>40K</b> - 4000K			3000K	358	591
					4000K	358	693

LEDLINE 820	A3T087-		qty				
	Wattage: 8.8W/10.6W(DV)	Dimming	CCT - 90 CRI		Delivered Lumen (lm)		
	<b>DN</b> - Non Dim	<b>27K</b> -2700K			CCT	Non-Dim	0-10V
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K			2700K	478	716
	<b>DV</b> - 0-10V	<b>40K</b> - 4000K			3000K	478	788
					4000K	478	924



## CLICKTRACK 30 SURFACE SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS

### LEDLINE

#### FINISHES OPTIONS:

See page 12 for color options and use 2 digit numbers to indicate your choices

LEDLINE 1020	A3T088-	qty			
		Delivered Lumen (lm)	CCT	Non-Dim	0-10V
Wattage: 11W/13.2W(DV)	Dimming	CCT - 90 CRI			
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	2700K	597	896
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K	3000K	597	985
	<b>DV</b> - 0-10V	<b>40K</b> - 4000K	4000K	597	1155

LEDLINE 1220	A3T089-	qty			
		Delivered Lumen (lm)	CCT	Non-Dim	0-10V
Wattage: 13.2W/15.8W(DV)	Dimming	CCT - 90 CRI			
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	2700K	716	1075
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K	3000K	716	1182
	<b>DV</b> - 0-10V	<b>40K</b> - 4000K	4000K	716	1386

### MAGIQ

MAGIQ 4	A380062-	qty						
		Delivered Lumen (lm)	CCT	8°	14°	34°		
Wattage: 13.3W	Dimming	CCT - 90 CRI	Finish	Reflector				
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	◆ —	<b>8</b> - 8°	2700K	659	612	781
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K	(28 colors)	<b>14</b> - 14°	3000K	712	661	843
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K		<b>34</b> - 34°	3500K	727	675	860
		<b>40K</b> - 4000K			4000K	742	689	878

MAGIQ 4 KORONA	A380052-	qty						
		Delivered Lumen (lm)	CCT	8°	14°	34°		
Wattage: 13.3W	Dimming	CCT - 90 CRI	Finish	Reflector				
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	◆ —	<b>8</b> - 8°	2700K	659	612	781
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K	▲ —	<b>14</b> - 14°	3000K	712	661	843
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K	(28 colors)	<b>34</b> - 34°	3500K	727	675	860
		<b>40K</b> - 4000K			4000K	742	689	878

## CLICKTRACK 30 SURFACE SYSTEM SPECIFICATION SHEET

PROJECT
TYPE
NOTES
QUANTITY
DATE

### SNOOKER

#### FINISHES OPTIONS:

See page 12 for color options and use 2 digit numbers to indicate your choices

INSERTS

SNOOKER	A3T090-						qty				
	Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Reflector	Cable (Color/Length)	Delivered Lumen (lm)				
	<b>DN</b> - Non Dim <b>DP</b> - Phase Dim <b>DV</b> - 0-10V	<b>27K</b> -2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	◆ ____ (28 colors)	<b>32</b> - 32°  <b>58</b> - 58°	T ____ (2 digit number below)	CCT    32°    58°					
						2700K    283    310					
						Color	2000m	4000m	3000K    300    328		
						Black	01	02	3500K    317    347		
						White	03	04	4000K    325    356		
Orange	05	06									
Red	07	08									
Green	09	10									

SNOOKER SHINE	A3T091-						qty				
	Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Reflector	Shine Ring	Cable (Color/Length)	Delivered Lumen (lm)			
	<b>DN</b> - Non Dim <b>DP</b> - Phase Dim <b>DV</b> - 0-10V	<b>27K</b> -2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	◆ ____ (28 colors)	<b>32</b> - 32°  <b>58</b> - 58°	○ ____ (6 colors)	CCT    32°    58°					
						2700K    283    310					
						Color	2000m	4000m	3000K    300    328		
						Black	01	02	3500K    317    347		
						White	03	04	4000K    325    356		
Orange	05	06									
Red	07	08									
Green	09	10									

## CLICKTRACK 30 SURFACE SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

### SYSTEM SUMMARY

#### System

##### Type

Surface  
Rated for Dry Locations Ceiling and Wall Mounted

##### Approval Status

Certified to North American Standards

##### Emission

Refer to emission icon beside each light insert and symbol legend for descriptions

##### Efficiency

Acrylic Opal Diffuser (snap-in) lens 43%

##### Profile

##### Measurement

w 30mm (1 1/2") x ht. 64mm (2 1/2")

##### Housing

Anodized extruded aluminum profile available per meter and field-cuttable  
Profiles have a maximum length of 3000mm (9' 10 3/16") and joined together with couplers to ensure uniform appearance and easy installation

#### Electrical

##### Connections

Luminaries are pre-wired by factory

##### Power Feed

Located next to the end cap at the end of the fixture, on top of the profile  
If a different location is required, please specify  
A connector is located on one end of the 48V profile channel to carry the electrical power from the supply unit - there is 165mm (6 1/2") of unusable space for inserts from the end cap  
3 Wires - non-dimming or phase dimming  
4 Wires - two circuits of non-dimming or phase dimming  
5 Wires - 0-10V dimming or dali dimming

##### LED Driver

Driver Included with Power Supply Unit (Non-dimming only). 0-10V driver must be remote with supplied enclosure. Maximum distance between the power supply and the last fixture on the circuit is 30' using a 18-gauge wire. For more than 30', the gauge of the wire must be determined by a certified professional. The length of the fixture specified must be considered within the maximum distance of 3'. Provisions must be made on site for accessibility to the power supplies.  
Electronic Class 2 driver, Universal 120V/277V  
Non Dimming Driver, Dimming Driver 0-10V (10-100%)  
Consult factory for driver cutsheet  
If a different driver is required, please specify

##### Emergency Inverter Compatible

To be installed remotely, and provided by others  
It can be located up to 250m away from the fixture

Emergency circuit wiring is available upon request (Isolated track with dedicated driver used for emergency circuit will connect to emergency battery pack - supplied by others)

#### General

##### Features

Korona Cone is a glare-reduction cone that sits in front of the reflector - available in 28 standard colors, thus creating a special decorative effect

LFO lenses ensure a glare free downlight without illuminating the luminaries housing and the lowest UGR ratings perfect for residential and hospitality applications

All spots are mounted simply by clicking them into the track, without the need for tools. The cable of the pendants can be flexibly shortened or extended at any time

The Clicktrack is standard black on the inside, while the outside is available in the 28 colors to complement any interior design concept

##### Custom Requests and Additional Options


Availability depends by insert, system, and configuration  
Must consult factory and allow up to 5 business days for an answer

Special beam angles, individual sizes, special LEDs, RGB-W, tunable, light inserts with different outputs

Special LEDs optimize luminaries to meet different applications  
Gold+ invokes a heavy golden tone intended for bread and pastries  
Meat+ displays saturated red light (white parts of product will appear slightly red)  
Art+ highlights pieces of art without adversely affecting the perception of individual colors  
Fashion+ has the entire color spectrum brilliantly orchestrated without distorting the color temperature

##### Configuration

Consult factory for patterns or custom designs  
Provide configuration drawings



\*Shop drawings provided upon receiving purchase order

#### Warranty

ZANEEN provides a limited warranty from date of purchase to original purchaser

**LED Inserts:** 5 year tested for 50,000 hours at 70% lumen output (L70)

**LED Driver:** 5 year

**Non-Electrical Components:** 1 year

\*Check boxes to complete specification order and submit to quotes@zaneen.com to receive a formal BOM and a finalized model number

\*In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

PROJECT \_\_\_\_\_  
 TYPE \_\_\_\_\_  
 NOTES \_\_\_\_\_  
 QUANTITY \_\_\_\_\_  
 DATE \_\_\_\_\_

## CLICKTRACK 30 SURFACE SYSTEM SPECIFICATION SHEET

### FINISH COLORS




Sparkling Silver - 01



Black Velvet - 02



Crystal White - 03



Creamy - 04



Hampton Bay - 05



Urban Forest - 07



In the Army - 08



Rusty Angel - 09




Fade to Grey - 12



Mysterious Grey - 13



Lost Dream - 15




Purple Sky - 16




Fresh Oh - 17



Funky P - 18



Kissing Aphrodite - 19



Poseidon's Paradise - 20



Blue Sky - 21



Spring Green - 22



Mellow Yellow - 23



Golden Heart - 24



Gun Metal - 25



Champagne Cream - 26



Copper Mine - 27



Ancient Bronze - 28



Jazz Gold - 29



Olive Breeze - 30



Moonlight Silver - 31



Rosewood Red - 32



### SHINE RING



Opal - 01



Yellow - 02



Orange - 03



Red - 04



Blue - 05



Green - 06




**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

**Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.






































































**Gun Metal:** No Gun Metal finish is alike. It combines a mixture of transparent and black color particles which ensures a highly individual effect and no luminaire being identical.

**Champagne Cream, Copper Mine, Ancient Bronze + Jazz Gold:** These finishes have slight fading from specific powder coating production. Each luminaire will slightly vary.











RAL Color Upon Request













### LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimnable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

### IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

### IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

## CLICKTRACK 30 SURFACE SYSTEM SPECIFICATION SHEET

### WIRING DIAGRAMS


ALL ZANEEN FIXTURES ARE MANUFACTURED TO NORTH AMERICAN ELECTRICAL STANDARDS

Post Sales Support  
 HQ 1-800-388-3382 X 625 support@zaneen.com


#### IMPORTANT

- Do NOT connect directly to line voltage
- There is a minimum and maximum load per driver (See fixture and driver specifications).
- Fixture MUST be connected to LED driver, prior to turning power on

#### PHASE/NON-DIMMING WIRING DIAGRAM

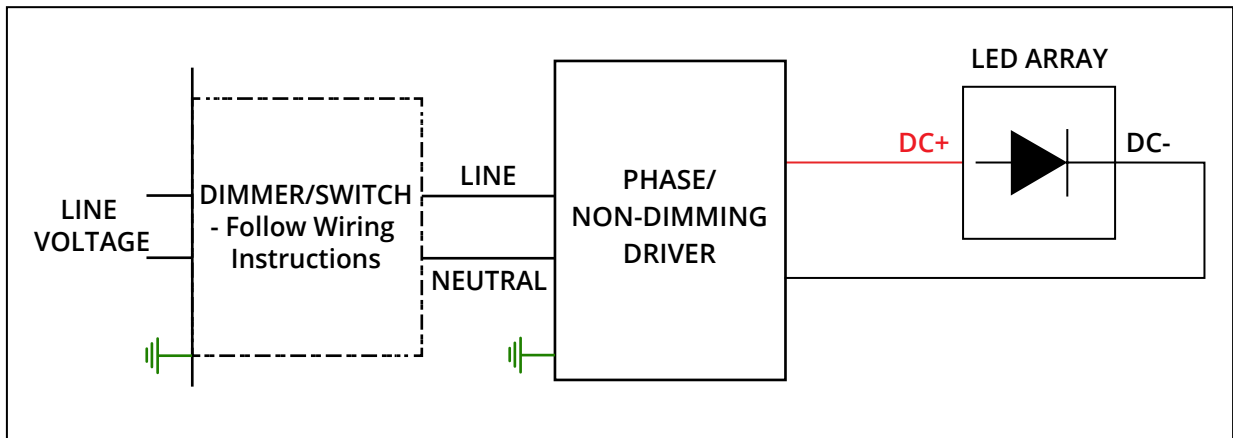

#### 0-10V DIMMING WIRING DIAGRAM

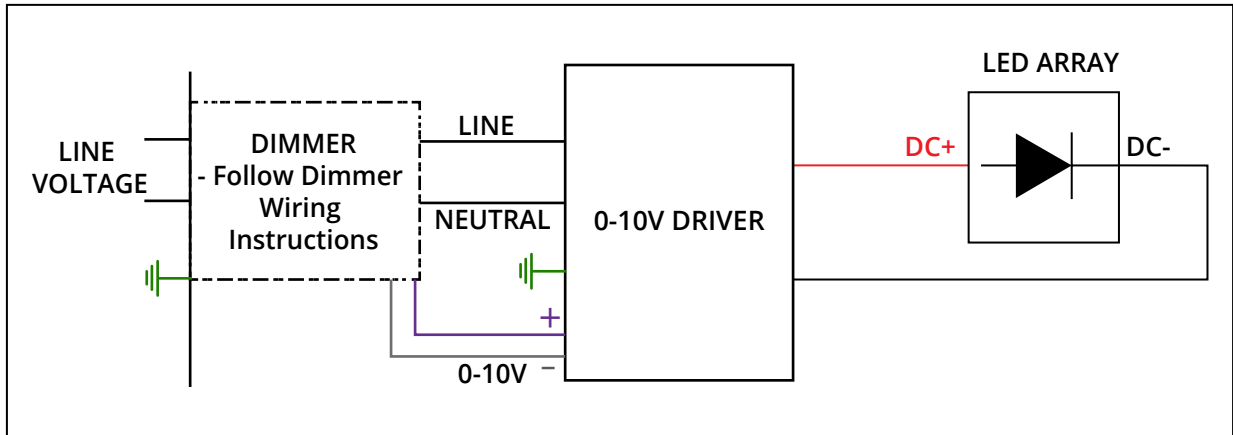

## CLICKTRACK 30 SURFACE SYSTEM SPECIFICATION SHEET

PROJECT \_\_\_\_\_  
TYPE \_\_\_\_\_  
NOTES \_\_\_\_\_  
QUANTITY \_\_\_\_\_  
DATE \_\_\_\_\_

Insert custom drawing here or attach with additional pages

