

## HYPRO 40 RECESSED SYSTEM SPECIFICATION SHEET


PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____




### ARCHITECTURAL | HYPRO 40

HYPRO 40 creates unique new levels of lighting structure: The individually configurable recessed profile can run around and across walls and ceilings, creating three-dimensional continuous lines of light. Both general and accent lighting can be integrated into the profile at the same time. With this freedom, the lighting can adapt perfectly to the interior design and structure of the room.

The system is equipped with the innovative Rico reflectors, achieving the highest efficiency with a unique glare-free. With additional inserts such as the MAGIQ family, homogeneous illumination is guaranteed. For the most comfortable lighting scenario and greater flexibility, tunable white is available within the system spotlights CENTRIQ IN and OIKO PRO IN.



### SYSTEM PROFILE

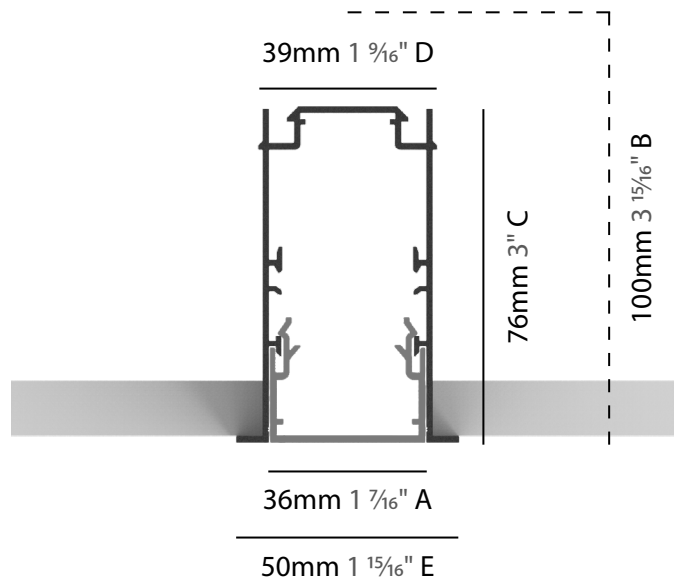

A: Opening width | B: Recess depth | C: Profile height  
D: Profile width | E: Mounting width including frame

## HYPRO 40 RECESSED SYSTEM SPECIFICATION SHEET

PROJECT \_\_\_\_\_  
 TYPE \_\_\_\_\_  
 NOTES \_\_\_\_\_  
 QUANTITY \_\_\_\_\_  
 DATE \_\_\_\_\_

### SYSTEM GUIDE

To make your product selection and complete system specification, proceed with the following: review system options, create your system code in the field below and include your quantity. For the inserts and components, use the field beside each product name. Submit to quotes@zaneen.com to receive a formal BOM and finalized model numbers.

EXAMPLE A3HY40-REC-SYS-UNV-DN-1'-S-01

UPON REQUEST  
 Additional Options \_\_\_\_\_  
 \_\_\_\_\_ Color Temperature  
 \_\_\_\_\_ RGB-W / Tunable  
 \_\_\_\_\_ Lumen Outputs  
 \_\_\_\_\_ Beam Angle  
 \_\_\_\_\_ Special LED  
 \_\_\_\_\_ CRI



### SYSTEM BUILD CODE: A3HY40-REC-SYS- qty

<b>ELECTRICAL</b>	Voltage	Dimming	Circuit
	<b>UNV</b> - 120/277V	<b>DN</b> - Non Dim	<b>EMCIR</b> - Emergency Circuit
	<b>120</b> - 120V	<b>DP</b> - Phase Dim (Triac/ELV)	
	<b>347</b> - 347V	<b>DV</b> - 0-10V (100-1%)	
	<b>DD</b> - DALI (100-1%)		

<b>LAYOUT</b>	Fixture Head Spacing* (approx.)	Run Shapes	System Finish
	<b>10"</b> - on center	<b>S</b> _____ ' _____' Straight	Profile <b>◆</b> _____ (28 colors) 
	<b>20"</b> - on center	<b>L</b> _____ 'x _____' Ceiling to Ceiling	
	<b>30"</b> - on center	<b>LV</b> _____ 'x _____' Ceiling to Wall	
	<b>40"</b> - on center	<b>U</b> _____ 'x _____' 'x _____' _____	
	<b>CUS (XX)</b> - Custom	<b>R</b> _____ 'x _____' Rectangle	
	<b>T</b> _____ 'x _____' _____		
	<b>X</b> _____ 'x _____' _____		
*Dependent on fixture specified and length of integral driver			

<b>INSERTS</b>	<b>CENTRIQ</b>		INSERT BUILD CODE EXAMPLE: A38897-DN-27K-01-01-01-24		FINISHES OPTIONS: See page 21 for color options and use 2 digit numbers to indicate your choices			
	CENTRIQ Ø30	A38897-	qty					
	Wattage: 4.4W	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)		
		<b>DN</b> - Non Dim	<b>27K</b> - 2700K	◆ _____	<b>24</b> - 24°	<b>CCT</b>	<b>24°</b>	<b>32°</b>
		<b>DV</b> - 0-10V	<b>30K</b> - 3000K	▲ _____		<b>32</b> - 32°	2700K	264
			<b>35K</b> - 3500K	● _____	3000K		279	249
			<b>40K</b> - 4000K	(28 colors)	3500K		295	263
						4000K	302	270
	CENTRIQ Ø40 SUPERSPOT	A38898-	qty					
	Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)			
	<b>DN</b> - Non Dim	<b>27K</b> - 2700K	◆ _____	<b>CCT</b>			<b>12°</b>	
	<b>DV</b> - 0-10V	<b>30K</b> - 3000K	▲ _____	2700K			378	
		<b>35K</b> - 3500K	● _____	3000K			400	
		<b>40K</b> - 4000K	(28 colors)	3500K			422	
					4000K			433

## HYPRO 40 RECESSED SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS

### CENTRIQ

**FINISHES OPTIONS:**

See page 21 for color options and use 2 digit numbers to indicate your choices

CENTRIQ Ø40	A38899-	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)														
						CCT	22°	30°	34°	38°	48°									
Wattage: 6.5W																				
	<b>DN</b> - Non Dim <b>DV</b> - 0-10V		27K -2700K	◆ ___ ▲ ___ ● ___ (28 colors)	<b>22</b> - 22° <b>30</b> - 30° <b>34</b> - 34° <b>38</b> - 38° <b>48</b> - 48°	2700K	519	501	379	480	472									
			30K - 3000K			544	524	397	502	494										
			35K - 3500K			545	525	398	503	495										
			40K - 4000K			575	555	420	531	523										

CENTRIQ Ø55 SUPERSPOT	A38900-	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)	
						CCT	8°
Wattage: 9.1W							
	<b>DN</b> - Non Dim <b>DV</b> - 0-10V		27K -2700K	◆ ___ ▲ ___ ● ___ (28 colors)		2700K	474
			30K - 3000K			502	
			3500K			530	
			4000K			553	

CENTRIQ Ø55	A380465-	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)														
						CCT	18°	26°	34°	36°	52°									
Wattage: 12W																				
	<b>DN</b> - Non Dim <b>DV</b> - 0-10V		27K -2700K	◆ ___ ▲ ___ ● ___ (28 colors)	<b>18</b> - 18° <b>26</b> - 26° <b>34</b> - 34° <b>36</b> - 36° <b>52</b> - 52°	2700K	772	663	795	828	843									
			3000K			808	694	832	867	882										
			3500K			838	719	863	899	915										
			4000K			857	735	882	919	935										

CENTRIQ DOUBLE Ø30	A38902-	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)		
						CCT	24°	32°
Wattage: 8.8W								
	<b>DN</b> - Non Dim <b>DV</b> - 0-10V		27K -2700K	◆ ___ ▲ ___ ● ___ (28 colors)	<b>24</b> - 24° <b>32</b> - 32°	2700K	527	471
			3000K			558	499	
			3500K			589	527	
			4000K			605	541	

CENTRIQ DOUBLE Ø40 SUPERSPOT	A38903-	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)	
						CCT	12°
Wattage: 12.8W							
	<b>DN</b> - Non Dim <b>DV</b> - 0-10V		27K -2700K	◆ ___ ▲ ___ ● ___ (28 colors)		2700K	755
			3000K			800	
			3500K			844	
			4000K			867	

## HYPRO 40 RECESSED SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

CENTRIQ	FINISHES OPTIONS: See page 21 for color options and use 2 digit numbers to indicate your choices																																																							
	<b>CENTRIQ DOUBLE Ø40</b> Wattage: 13.1W	<b>A38904-</b>	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)																																																	
	<b>DN - Non Dim</b>	<b>27K - 2700K</b>	◆ ___	<b>22 - 22°</b>	<table border="1"> <tr> <th colspan="6">CCT</th> <th colspan="6">8°</th> </tr> <tr> <th>22°</th><th>30°</th><th>34°</th><th>38°</th><th>48°</th><th>48°</th> <th>2700K</th><th>3000K</th><th>3500K</th><th>4000K</th><th>1151</th><th>1109</th><th>841</th><th>1063</th><th>1045</th> </tr> <tr> <td>2700K</td><td>1039</td><td>1001</td><td>759</td><td>960</td><td>944</td> <td>3000K</td><td>1088</td><td>1048</td><td>794</td><td>1004</td><td>988</td> <td>3500K</td><td>1090</td><td>1051</td><td>796</td><td>1007</td><td>990</td> <td>4000K</td><td>1151</td><td>1109</td><td>841</td><td>1063</td><td>1045</td> </tr> </table>	CCT						8°						22°	30°	34°	38°	48°	48°	2700K	3000K	3500K	4000K	1151	1109	841	1063	1045	2700K	1039	1001	759	960	944	3000K	1088	1048	794	1004	988	3500K	1090	1051	796	1007	990	4000K	1151	1109	841	1063	1045
	CCT						8°																																																	
	22°	30°	34°	38°		48°	48°	2700K	3000K	3500K	4000K	1151	1109	841	1063	1045																																								
	2700K	1039	1001	759		960	944	3000K	1088	1048	794	1004	988	3500K	1090	1051	796	1007	990	4000K	1151	1109	841	1063	1045																															
	<b>DV - 0-10V</b>	<b>30K - 3000K</b>	▲ ___	<b>30 - 30°</b>																																																				
	<b>35K - 3500K</b>	● ___	<b>34 - 34°</b>																																																					
	<b>40K - 4000K</b>	(28 colors)	<b>38 - 38°</b>																																																					
					<b>48 - 48°</b>																																																			
<b>CENTRIQ DOUBLE Ø55 SUPERSPOT</b> Wattage: 18.2W	<b>A38905-</b>	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)																																																		
	<b>DN - Non Dim</b>	<b>27K - 2700K</b>	◆ ___	(28 colors)	<b>8°</b>	<table border="1"> <tr> <th>CCT</th><th>8°</th></tr> <tr> <td>2700K</td><td>948</td></tr> <tr> <td>3000K</td><td>1004</td></tr> <tr> <td>3500K</td><td>1060</td></tr> <tr> <td>4000K</td><td>1105</td></tr> </table>	CCT	8°	2700K	948	3000K	1004	3500K	1060	4000K	1105																																								
	CCT	8°																																																						
	2700K	948																																																						
	3000K	1004																																																						
	3500K	1060																																																						
4000K	1105																																																							
<b>DV - 0-10V</b>	<b>30K - 3000K</b>	▲ ___																																																						
	<b>35K - 3500K</b>	● ___																																																						
	<b>40K - 4000K</b>																																																							
<b>CENTRIQ DOUBLE Ø55</b> Wattage: 23.9W	<b>A38906-</b>	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)																																																		
	<b>DN - Non Dim</b>	<b>27K - 2700K</b>	◆ ___	(28 colors)	<table border="1"> <tr> <th colspan="6">CCT</th> <th colspan="6">8°</th> </tr> <tr> <th>18°</th><th>26°</th><th>34°</th><th>36°</th><th>52°</th><th>52°</th> <th>2700K</th><th>3000K</th><th>3500K</th><th>4000K</th><th>1714</th><th>1471</th><th>1764</th><th>1838</th><th>1871</th> </tr> <tr> <td>2700K</td><td>1545</td><td>1326</td><td>1590</td><td>1657</td><td>1686</td> <td>3000K</td><td>1616</td><td>1387</td><td>1664</td><td>1733</td><td>1764</td> <td>3500K</td><td>1677</td><td>1439</td><td>1726</td><td>1798</td><td>1830</td> <td>4000K</td><td>1714</td><td>1471</td><td>1764</td><td>1838</td><td>1871</td> </tr> </table>	CCT						8°						18°	26°	34°	36°	52°	52°	2700K	3000K	3500K	4000K	1714	1471	1764	1838	1871	2700K	1545	1326	1590	1657	1686	3000K	1616	1387	1664	1733	1764	3500K	1677	1439	1726	1798	1830	4000K	1714	1471	1764	1838	1871
	CCT						8°																																																	
	18°	26°	34°			36°	52°	52°	2700K	3000K	3500K	4000K	1714	1471	1764	1838	1871																																							
	2700K	1545	1326			1590	1657	1686	3000K	1616	1387	1664	1733	1764	3500K	1677	1439	1726	1798	1830	4000K	1714	1471	1764	1838	1871																														
	<b>DV - 0-10V</b>	<b>30K - 3000K</b>	▲ ___			<b>26 - 26°</b>																																																		
	<b>35K - 3500K</b>	● ___	<b>34 - 34°</b>																																																					
	<b>40K - 4000K</b>		<b>36 - 36°</b>																																																					
			<b>52 - 52°</b>																																																					
<b>CENTRIQ IN Ø65</b> Wattage: 23W	<b>A380318-</b>	Dimming	CCT - 90 CRI	Finish	Reflector	Optics	Delivered Lumen (lm)																																																	
	<b>DN - Non Dim</b>	<b>27K - 2700K</b>	◆ ___	(28 colors)	<table border="1"> <tr> <th>24°</th><th>36°</th><th>52°</th></tr> <tr> <td><b>24 - 24°</b></td><td><b>36 - 36°</b></td><td><b>52 - 52°</b></td></tr> </table>	24°	36°	52°	<b>24 - 24°</b>	<b>36 - 36°</b>	<b>52 - 52°</b>	<table border="1"> <tr> <th colspan="3">CCT</th> <th>24°</th><th>36°</th><th>52°</th> </tr> <tr> <td>2700K</td><td>1946</td><td>2016</td><td>1975</td> <td><b>00 - No optic</b></td> <td></td> </tr> <tr> <td>3000K</td><td>2026</td><td>2099</td><td>2056</td> <td><b>01 - Linear Spread</b></td> <td></td> </tr> <tr> <td>3500K</td><td>2113</td><td>2189</td><td>2145</td> <td><b>02 - Spread</b></td> <td></td> </tr> <tr> <td>4000K</td><td>2211</td><td>2291</td><td>2245</td> <td><b>03 - Honeycomb</b></td> <td></td> </tr> </table>	CCT			24°	36°	52°	2700K	1946	2016	1975	<b>00 - No optic</b>		3000K	2026	2099	2056	<b>01 - Linear Spread</b>		3500K	2113	2189	2145	<b>02 - Spread</b>		4000K	2211	2291	2245	<b>03 - Honeycomb</b>															
	24°	36°	52°																																																					
	<b>24 - 24°</b>	<b>36 - 36°</b>	<b>52 - 52°</b>																																																					
	CCT					24°	36°	52°																																																
	2700K	1946	2016			1975	<b>00 - No optic</b>																																																	
3000K	2026	2099	2056	<b>01 - Linear Spread</b>																																																				
3500K	2113	2189	2145	<b>02 - Spread</b>																																																				
4000K	2211	2291	2245	<b>03 - Honeycomb</b>																																																				
<b>DV - 0-10V</b>	<b>30K - 3000K</b>	▲ ___	<b>36 - 36°</b>																																																					
	<b>35K - 3500K</b>	● ___	<b>52 - 52°</b>																																																					
	<b>40K - 4000K</b>																																																							
<b>CENTRIQ IN Ø65 TW</b> Wattage: 14.4W	<b>A380319-</b>	Finish	Reflector	Optics	Delivered Lumen (lm)																																																			
	◆ ___	(28 colors)	<table border="1"> <tr> <th>18°</th><th>34°</th><th>54°</th></tr> <tr> <td><b>18 - 18°</b></td><td><b>34 - 34°</b></td><td><b>54 - 54°</b></td></tr> </table>	18°	34°	54°	<b>18 - 18°</b>	<b>34 - 34°</b>	<b>54 - 54°</b>	<table border="1"> <tr> <th colspan="2">CCT</th> <th>18°</th><th>34°</th><th>54°</th> </tr> <tr> <td colspan="2"><b>TUNABLE WHITE</b></td> <td></td><td></td><td></td> </tr> <tr> <td colspan="2">2700K - 6500K (MAX)</td> <td></td><td></td><td></td> </tr> <tr> <td></td><td></td> <td><b>18°</b></td><td><b>34°</b></td><td><b>54°</b></td> </tr> <tr> <td></td><td></td> <td>1202</td><td>1251</td><td>1269</td> </tr> </table>	CCT		18°	34°	54°	<b>TUNABLE WHITE</b>					2700K - 6500K (MAX)							<b>18°</b>	<b>34°</b>	<b>54°</b>			1202	1251	1269																					
	18°			34°	54°																																																			
	<b>18 - 18°</b>			<b>34 - 34°</b>	<b>54 - 54°</b>																																																			
	CCT			18°	34°	54°																																																		
	<b>TUNABLE WHITE</b>																																																							
2700K - 6500K (MAX)																																																								
		<b>18°</b>	<b>34°</b>	<b>54°</b>																																																				
		1202	1251	1269																																																				
▲ ___																																																								
● ___																																																								

## HYPRO 40 RECESSED SYSTEM SPECIFICATION SHEET

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

INSERTS	CENTRIQ		FINISHES OPTIONS: See page 21 for color options and use 2 digit numbers to indicate your choices				qty		
		<b>CENTRIQ IN Ø65 SUPERSPOT</b>	<b>A380321-</b>						
Wattage: 21.1W		Dimming	CCT - 90 CRI	Finish	Optics	Delivered Lumen (lm)			
	<b>DN - Non Dim</b> <b>DV - 0-10V</b>	<b>27K - 2700K</b> <b>30K - 3000K</b> <b>35K - 3500K</b> <b>40K - 4000K</b>	◆ ____ ▲ ____ (28 colors)	<b>00 - No optic</b> <b>01 - Linear Spread</b> <b>02 - Spread</b> <b>03 - Honeycomb</b>	CCT	12°			
					2700K	1483			
					3000K	1465			
					3500K	1553			
					4000K	1554			
	<b>CENTRIQ IN Ø65 FLEX</b>	<b>A380320-</b>							
	Wattage: 20.5W	Dimming	CCT - 90 CRI	Finish		Delivered Lumen (lm)			
	<b>DN - Non Dim</b> <b>DV - 0-10V</b>	<b>27K - 2700K</b> <b>30K - 3000K</b> <b>35K - 3500K</b> <b>40K - 4000K</b>	◆ ____ ▲ ____ (28 colors)		CCT	14° - 44°			
					2700K	1205 - 1127			
					3000K	1298 - 1214			
					3500K	1376 - 1287			
					4000K	1377 - 1288			
	<b>CENTRIQ IN Ø83</b>	<b>A380323-</b>							
	Wattage: 36.2W	Dimming	CCT - 90 CRI	Finish	Reflector	Optics	Delivered Lumen (lm)		
	<b>DN - Non Dim</b> <b>DV - 0-10V</b>	<b>27K - 2700K</b> <b>30K - 3000K</b> <b>35K - 3500K</b> <b>40K - 4000K</b>	◆ ____ ▲ ____ (28 colors)	<b>20 - 20°</b> <b>32 - 32°</b> <b>54 - 54°</b>	<b>00 - No optic</b> <b>01 - Linear Spread</b> <b>02 - Spread</b> <b>03 - Honeycomb</b>	CCT	20°	32°	54°
						2700K	2923	3030	2916
						3000K	3044	3156	3037
						3500K	3173	3290	3166
						4000K	3328	3450	3320
	<b>CENTRIQ IN Ø83 TW</b>	<b>A380324-</b>							
	Wattage: 34.9W	Finish		Reflector	Optics	Delivered Lumen (lm)			
	◆ ____ ▲ ____ (28 colors)		<b>24 - 24°</b> <b>34 - 34°</b> <b>54 - 54°</b>	<b>00 - No optic</b> <b>01 - Linear Spread</b> <b>02 - Spread</b> <b>03 - Honeycomb</b>	<b>TUNABLE WHITE</b>				
					2700K - 6500K (MAX)				
					24°	2893			
					34°	2907			
					54°	2805			
	<b>CENTRIQ IN Ø83 SUPERSPOT</b>	<b>A380327-</b>							
	Wattage: 25.7W	Dimming	CCT - 90 CRI	Finish	Optics	Delivered Lumen (lm)			
	<b>DN - Non Dim</b> <b>DV - 0-10V</b>	<b>27K - 2700K</b> <b>30K - 3000K</b> <b>35K - 3500K</b> <b>40K - 4000K</b>	◆ ____ ▲ ____ (28 colors)	<b>00 - No optic</b> <b>01 - Linear Spread</b> <b>02 - Spread</b> <b>03 - Honeycomb</b>	CCT	12°			
					2700K	1609			
					3000K	1733			
					3500K	1838			
					4000K	1839			

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS

### CENTRIQ

**FINISHES OPTIONS:**

See page 21 for color options and use 2 digit numbers to indicate your choices

	<b>CENTRIQ IN Ø83 SUPERSPOT TW</b>	<b>A380328-</b>			qty
	Wattage: 8.2W	Finish	Optics		Delivered Lumen (lm)
	◆ ____ ▲ ____ (28 colors)			<b>00</b> - No optic <b>01</b> - Linear Spread <b>02</b> - Spread <b>03</b> - Honeycomb	<b>TUNABLE WHITE</b> 2700K - 6500K (MAX)
			10°	569	

	<b>CENTRIQ IN Ø83 FLEX</b>	<b>A380325-</b>			qty
	Wattage: 20.5W	Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)
	◆ ____ ▲ ____ (28 colors)	<b>DN</b> - Non Dim <b>DV</b> - 0-10V	<b>27K</b> - 2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	CCT <b>14° - 44°</b>	2700K: 2923 3000K: 3044 3500K: 3261 4000K: 3328

	<b>CENTRIQ IN Ø83 FLEX TW</b>	<b>A380326-</b>			qty
	Wattage: 8.2W	Finish	Optics		Delivered Lumen (lm)
	◆ ____ ▲ ____ (28 colors)			<b>00</b> - No optic <b>01</b> - Linear Spread <b>02</b> - Spread <b>03</b> - Honeycomb	<b>TUNABLE WHITE</b> 2700K - 6500K (MAX)
			14° - 46°	479 - 451	

### HADI

	<b>HADI-M SUSPENDED</b>	<b>A380550-</b>			qty
	Wattage: 37.3W	Dimming	CCT - 90 CRI	Finish	Cable Length
	◆ ____ ▲ ____ (28 colors)	<b>DN</b> - Non Dim <b>DP</b> - Phase Dim <b>DV</b> - 0-10V	<b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	(28 colors)	<b>01</b> - 2000mm <b>02</b> - 6000mm
					3000K: 4269 3500K: 4311 4000K: 4352

	<b>HADI-M SUSPENDED DIR/IND</b>	<b>A380554-</b>			qty
	Wattage: 77.8W	Dimming	CCT - 90 CRI	Finish	Cable Length
	◆ ____ ▲ ____ (28 colors)	<b>DN</b> - Non Dim <b>DP</b> - Phase Dim <b>DV</b> - 0-10V	<b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	(28 colors)	<b>01</b> - 2000mm <b>02</b> - 6000mm
					3000K: 5998 3500K: 6059 4000K: 6119

## HYPRO 40 RECESSED SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS

### HADI

#### FINISHES OPTIONS:

See page 21 for color options and use 2 digit numbers to indicate your choices

HADI-Q SUSPENDED		A380558-				qty	
Wattage: 37.3W		Dimming	CCT - 90 CRI	Finish	Cable Length	Delivered Lumen (lm)	
	DN - Non Dim	30K - 3000K	◆ ____	<b>01 - 2000mm</b> <b>02 - 6000mm</b>  (28 colors)	3000K	3911	
	DP - Phase Dim	35K - 3500K	▲ ____		3500K	3949	
	DV - 0-10V	40K - 4000K			4000K	3987	
HADI-Q SUSPENDED DIR/IND		A380562-				qty	
Wattage: 77.8W		Dimming	CCT - 90 CRI	Finish	Cable Length	Delivered Lumen (lm)	
	DN - Non Dim	30K - 3000K	◆ ____	<b>01 - 2000mm</b> <b>02 - 6000mm</b>  (28 colors)	3000K	5783	
	DP - Phase Dim	35K - 3500K	▲ ____		3500K	5841	
	DV - 0-10V	40K - 4000K			4000K	5899	
HADI-M INTEGRATED		A380566-				qty	
Wattage: 37.3W		Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)		
	DN - Non Dim	30K - 3000K	◆ ____	(28 colors)	3000K	4269	
	DP - Phase Dim	35K - 3500K			3500K	4311	
	DV - 0-10V	40K - 4000K			4000K	4352	
HADI-M INTEGRATED DIR/IND		A380570-				qty	
Wattage: 77.8W		Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)		
	DN - Non Dim	30K - 3000K	◆ ____	(28 colors)	3000K	5998	
	DP - Phase Dim	35K - 3500K			3500K	6059	
	DV - 0-10V	40K - 4000K			4000K	6119	
HADI-Q INTEGRATED		A380574-				qty	
Wattage: 37.3W		Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)		
	DN - Non Dim	30K - 3000K	◆ ____	(28 colors)	3000K	3911	
	DP - Phase Dim	35K - 3500K			3500K	3949	
	DV - 0-10V	40K - 4000K			4000K	3987	

## HYPRO 40 RECESSED SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS

### HADI

**FINISHES OPTIONS:**

See page 21 for color options and use 2 digit numbers to indicate your choices

HADI-Q INTEGRATED DIR/IND		A380578-			qty	
Wattage: 77.8W		Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
	<b>DN</b> - Non Dim	<b>30K</b> - 3000K	◆ ____ (28 colors)	3000K	5783	
	<b>DP</b> - Phase Dim	<b>35K</b> - 3500K		3500K	5841	
	<b>DV</b> - 0-10V	<b>40K</b> - 4000K		4000K	5899	

### HANGOVER PLUG

HANGOVER PLUG Ø28 H:150		A380364-					qty					
Wattage: 6.4W		Dimming	CCT - 90 CRI	Finish	Shine Ring	Reflector	Cable	Delivered Lumen (lm)				
	<b>DN</b> - Non Dim	<b>27K</b> - 2700K	◆ ____ ▲ ____ (28 colors)	○ ____ (6 colors) No shine ring: indicate with <b>00</b>	<b>20</b> - 20°	<b>26</b> - 26°	<b>56</b> - 56°	┌ ____ (5 colors/ 2 lengths)	CCT	20°	26°	56°
	<b>DV</b> - 0-10V	<b>30K</b> - 3000K							2700K	403	397	381
	<b>35K</b> - 3500K	3000K							427	420	404	
	<b>40K</b> - 4000K	3500K							451	443	426	
								4000K	463	455	438	

HANGOVER PLUG Ø28 H:300		A380366-					qty					
Wattage: 6.4W		Dimming	CCT - 90 CRI	Finish	Shine Ring	Reflector	Cable	Delivered Lumen (lm)				
	<b>DN</b> - Non Dim	<b>27K</b> - 2700K	◆ ____ ▲ ____ (28 colors)	○ ____ (6 colors) No shine ring: indicate with <b>00</b>	<b>20</b> - 20°	<b>26</b> - 26°	<b>56</b> - 56°	┌ ____ (5 colors/ 2 lengths)	CCT	20°	26°	56°
	<b>DV</b> - 0-10V	<b>30K</b> - 3000K							2700K	403	397	381
	<b>35K</b> - 3500K	3000K							427	420	404	
	<b>40K</b> - 4000K	3500K							451	443	426	
								4000K	463	455	438	

HANGOVER PLUG Ø28 H:450		A380368-					qty					
Wattage: 6.4W		Dimming	CCT - 90 CRI	Finish	Shine Ring	Reflector	Cable	Delivered Lumen (lm)				
	<b>DN</b> - Non Dim	<b>27K</b> - 2700K	◆ ____ ▲ ____ (28 colors)	○ ____ (6 colors) No shine ring: indicate with <b>00</b>	<b>20</b> - 20°	<b>26</b> - 26°	<b>56</b> - 56°	┌ ____ (5 colors/ 2 lengths)	CCT	20°	26°	56°
	<b>DV</b> - 0-10V	<b>30K</b> - 3000K							2700K	403	397	381
	<b>35K</b> - 3500K	3000K							427	420	404	
	<b>40K</b> - 4000K	3500K							451	443	426	
								4000K	463	455	438	

HANGOVER PLUG Ø40 H:150		A380370-					qty			
Wattage: 9.8W		Dimming	CCT - 90 CRI	Finish	Shine Ring	Reflector	Cable	Delivered Lumen (lm)		
	<b>DN</b> - Non Dim	<b>27K</b> - 2700K	◆ ____ ▲ ____ (28 colors)	○ ____ (6 colors) No shine ring: indicate with <b>00</b>	<b>40</b> - 40°	<b>52</b> - 52°	┌ ____ (5 colors/ 2 lengths)	CCT	40°	52°
	<b>DV</b> - 0-10V	<b>30K</b> - 3000K						2700K	694	684
	<b>35K</b> - 3500K	3000K						726	716	
	<b>40K</b> - 4000K	3500K						753	742	
								4000K	770	759



## HYPRO 40 RECESSED SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS

### HANGOVER PLUG

**FINISHES OPTIONS:**

See page 21 for color options and use 2 digit numbers to indicate your choices

HANGOVER PLUG Ø40 H:300	A380372-							qty			
		Wattage: 9.8W	Dimming	CCT - 90 CRI	Finish	Shine Ring	Reflector	Cable	Delivered Lumen (lm)		
									CCT	40°	52°
	<b>DN</b> - Non Dim <b>DV</b> - 0-10V	<b>27K</b> -2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	◆ ____ ▲ ____ (28 colors)	○ ____ (6 colors) No shine ring: indicate with <b>00</b>	<b>40</b> - 40° <b>52</b> - 52°	T ____ (5 colors/ 2 lengths)	2700K	694	684		
							3000K	726	716		
							3500K	753	742		
							4000K	770	759		

HANGOVER PLUG Ø40 H:450	A380374-							qty			
		Wattage: 9.8W	Dimming	CCT - 90 CRI	Finish	Shine Ring	Reflector	Cable	Delivered Lumen (lm)		
									CCT	40°	52°
	<b>DN</b> - Non Dim <b>DV</b> - 0-10V	<b>27K</b> -2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	◆ ____ ▲ ____ (28 colors)	○ ____ (6 colors) No shine ring: indicate with <b>00</b>	<b>40</b> - 40° <b>52</b> - 52°	T ____ (5 colors/ 2 lengths)	2700K	694	684		
							3000K	726	716		
							3500K	753	742		
							4000K	770	759		

HANGOVER PLUG Ø75 H:150	A380376-							qty			
		Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Shine Ring	Reflector	Cable	Delivered Lumen (lm)		
									CCT	6°	22°
	<b>DN</b> - Non Dim <b>DV</b> - 0-10V	<b>27K</b> -2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	◆ ____ ▲ ____ (28 colors)	○ ____ (6 colors) No shine ring: indicate with <b>00</b>	<b>6</b> - 6° <b>22</b> - 22° <b>38</b> - 38°	T ____ (5 colors/ 2 lengths)	2700K	389	335	371	
							3000K	412	355	393	
							3500K	435	375	415	
							4000K	447	385	426	

Ø75 H:150 DIR/IND	A380377-							qty				
		Wattage: 9.6W	Dimming	CCT - Direct	CCT - Indirect	Finish	Shine Ring	Reflector	Cable	Delivered Lumen (lm)		
										CCT	6°	22°
	<b>DN</b> - Non Dim <b>DV</b> - 0-10V	<b>27K</b> -2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	<b>27K</b> -2700K <b>30K</b> - 3000K <b>40K</b> - 4000K	◆ ____ ▲ ____ (28 colors)	○ ____ (6 colors) No shine ring: indicate with <b>00</b>	<b>6</b> - 6° <b>22</b> - 22° <b>38</b> - 38°	T ____ (5 colors/ 2 lengths)	27K/27K	712	656	691	
								30K/30K	750	690	728	
								35K/30K	770	709	748	
								40K/40K	793	730	770	

### HANGOVER PLUG MICRO-DOT

MICRO-DOT Ø28 H:150	A380365-						qty			
		Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Reflector	Cable	Delivered Lumen (lm)		
								CCT	32°	58°
	<b>DN</b> - Non Dim <b>DV</b> - 0-10V	<b>27K</b> -2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	◆ ____ ▲ ____ (28 colors)	<b>32</b> - 32° <b>58</b> - 58°	T ____ (5 colors/ 2 lengths)	2700K	283	310		
						3000K	300	328		
						3500K	317	347		
						4000K	325	356		

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

INSERTS

### HANGOVER PLUG MICRO-DOT

**FINISHES OPTIONS:**

See page 21 for color options and use 2 digit numbers to indicate your choices

MICRO-DOT Ø28 H:300	A380367-						qty		
Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Reflector	Cable	Delivered Lumen (lm)			
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	◆ ___	<b>32</b> - 32°	T ___ (5 colors/ 2 lengths)	CCT	32°	58°	
	<b>DV</b> - 0-10V	<b>30K</b> - 3000K	▲ ___	<b>58</b> - 58°		2700K	283	310	
		<b>35K</b> - 3500K	(28 colors)			3000K	300	328	
		<b>40K</b> - 4000K				3500K	317	347	
						4000K	325	356	
MICRO-DOT Ø28 H:450	A380369-						qty		
Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Reflector	Cable	Delivered Lumen (lm)			
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	◆ ___	<b>32</b> - 32°	T ___ (5 colors/ 2 lengths)	CCT	32°	58°	
	<b>DV</b> - 0-10V	<b>30K</b> - 3000K	▲ ___	<b>58</b> - 58°		2700K	283	310	
		<b>35K</b> - 3500K	(28 colors)			3000K	300	328	
		<b>40K</b> - 4000K				3500K	317	347	
						4000K	325	356	
MICRO-DOT Ø40 H:150	A380371-						qty		
Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Reflector	Cable	Delivered Lumen (lm)			
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	◆ ___	<b>32</b> - 32°	T ___ (5 colors/ 2 lengths)	CCT	32°	58°	
	<b>DV</b> - 0-10V	<b>30K</b> - 3000K	▲ ___	<b>58</b> - 58°		2700K	283	310	
		<b>35K</b> - 3500K	(28 colors)			3000K	300	328	
		<b>40K</b> - 4000K				3500K	317	347	
						4000K	325	356	
MICRO-DOT Ø40 H:300	A380373-						qty		
Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Reflector	Cable	Delivered Lumen (lm)			
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	◆ ___	<b>32</b> - 32°	T ___ (5 colors/ 2 lengths)	CCT	32°	58°	
	<b>DV</b> - 0-10V	<b>30K</b> - 3000K	▲ ___	<b>58</b> - 58°		2700K	283	310	
		<b>35K</b> - 3500K	(28 colors)			3000K	300	328	
		<b>40K</b> - 4000K				3500K	317	347	
						4000K	325	356	
MICRO-DOT Ø40 H:450	A380375-						qty		
Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Reflector	Cable	Delivered Lumen (lm)			
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	◆ ___	<b>32</b> - 32°	T ___ (5 colors/ 2 lengths)	CCT	32°	58°	
	<b>DV</b> - 0-10V	<b>30K</b> - 3000K	▲ ___	<b>58</b> - 58°		2700K	283	310	
		<b>35K</b> - 3500K	(28 colors)			3000K	300	328	
		<b>40K</b> - 4000K				3500K	317	347	
						4000K	325	356	

## HYPRO 40 RECESSED SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

### HYPLINE

INSERTS

HYPLINE 705	A380258-			qty				
	Wattage: 16.3W	Dimming	CCT - 90 CRI	Diffuser	Delivered Lumen (lm)			
	<b>DN</b> - Non Dim <b>DV</b> - 0-10V	<b>27K</b> - 2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	<b>MP</b> - Microprism <b>OP</b> - Opal <b>U</b> - U-Diffusor	Microprism Opal U-Diffusor	<b>Diffuser</b>	<b>MP</b>	<b>OP</b>	<b>U</b>
					2700K	1405	1511	1797
					3000K	1439	1548	1841
					3500K	1494	1607	1911
					4000K	1524	1640	1950

HYPLINE 1128	A380266-			qty				
	Wattage: 26W	Dimming	CCT - 90 CRI	Diffuser	Delivered Lumen (lm)			
	<b>DN</b> - Non Dim <b>DV</b> - 0-10V	<b>27K</b> - 2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	<b>MP</b> - Microprism <b>OP</b> - Opal <b>U</b> - U-Diffusor	Microprism Opal U-Diffusor	<b>Diffuser</b>	<b>MP</b>	<b>OP</b>	<b>U</b>
					2700K	2247	2418	2876
					3000K	2302	2477	2946
					3500K	2390	2572	3059
					4000K	2439	2624	3121

HYPLINE 1408	A380274-			qty				
	Wattage: 32.6W	Dimming	CCT - 90 CRI	Diffuser	Delivered Lumen (lm)			
	<b>DN</b> - Non Dim <b>DV</b> - 0-10V	<b>27K</b> - 2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	<b>MP</b> - Microprism <b>OP</b> - Opal <b>U</b> - U-Diffusor	Microprism Opal U-Diffusor	<b>Diffuser</b>	<b>MP</b>	<b>OP</b>	<b>U</b>
					2700K	2809	3023	3595
					3000K	2877	3096	3682
					3500K	2987	3214	3823
					4000K	3048	3280	3901

### MAGIQ

#### FINISHES OPTIONS:




See page 21 for color options and use 2 digit numbers to indicate your choices

MAGIQ 4	A38907-			qty				
	Wattage: 13.3W	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)		
	<b>DN</b> - Non Dim <b>DP</b> - Phase Dim <b>DV</b> - 0-10V	<b>27K</b> - 2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	<input type="checkbox"/> ____ (2 colors)	<b>8</b> - 8° <b>14</b> - 14° <b>34</b> - 34°	<b>CCT</b>	<b>8°</b>	<b>14°</b>	<b>34°</b>
					2700K	659	612	781
					3000K	712	661	843
					3500K	727	675	860
					4000K	742	689	878

MAGIQ 4 KORONA	A380490-			qty				
	Wattage: 13.3W	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)		
	<b>DN</b> - Non Dim <b>DP</b> - Phase Dim <b>DV</b> - 0-10V	<b>27K</b> - 2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	<input checked="" type="checkbox"/> ____ (28 colors)  <input type="checkbox"/> ____ (2 colors)	<b>8</b> - 8° <b>14</b> - 14° <b>34</b> - 34°	<b>CCT</b>	<b>8°</b>	<b>14°</b>	<b>34°</b>
					2700K	659	612	781
					3000K	712	661	843
					3500K	727	675	860
					4000K	742	689	878

## HYPRO 40 RECESSED SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

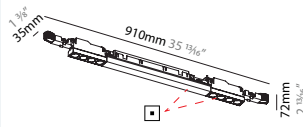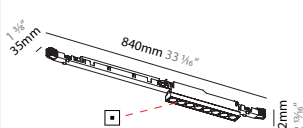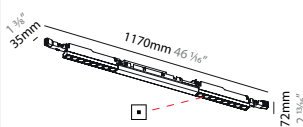INSERTS	MAGIQ		FINISHES OPTIONS: See page 21 for color options and use 2 digit numbers to indicate your choices																						
		<b>MAGIQ 4 + 4</b>	<b>A380496-</b>	qty																					
Wattage: 26.6W		Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)																			
<b>DN</b> - Non Dim <b>DP</b> - Phase Dim <b>DV</b> - 0-10V		<b>27K</b> -2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	<input type="checkbox"/> ____ (2 colors)	<b>8 - 8°</b>  <b>14 - 14°</b>  <b>34 - 34°</b>	<table border="1"> <thead> <tr> <th>CCT</th> <th>8°</th> <th>14°</th> <th>34°</th> </tr> </thead> <tbody> <tr> <td>2700K</td> <td>1318</td> <td>1225</td> <td>1561</td> </tr> <tr> <td>3000K</td> <td>1423</td> <td>1322</td> <td>1685</td> </tr> <tr> <td>3500K</td> <td>1453</td> <td>1350</td> <td>1721</td> </tr> <tr> <td>4000K</td> <td>1483</td> <td>1378</td> <td>1756</td> </tr> </tbody> </table>	CCT	8°	14°	34°	2700K	1318	1225	1561	3000K	1423	1322	1685	3500K	1453	1350	1721	4000K	1483	1378	1756
CCT		8°	14°	34°																					
2700K		1318	1225	1561																					
3000K	1423	1322	1685																						
3500K	1453	1350	1721																						
4000K	1483	1378	1756																						
<b>MAGIQ 4 + 4 KORONA</b>	<b>A380499-</b>	qty																							
Wattage: 26.6W	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)																				
<b>DN</b> - Non Dim <b>DP</b> - Phase Dim <b>DV</b> - 0-10V	<b>27K</b> -2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	<input checked="" type="checkbox"/> ____ (28 colors)  <input type="checkbox"/> ____ (2 colors)	<b>8 - 8°</b>  <b>14 - 14°</b>  <b>34 - 34°</b>	<table border="1"> <thead> <tr> <th>CCT</th> <th>8°</th> <th>14°</th> <th>34°</th> </tr> </thead> <tbody> <tr> <td>2700K</td> <td>1318</td> <td>1225</td> <td>1561</td> </tr> <tr> <td>3000K</td> <td>1423</td> <td>1322</td> <td>1685</td> </tr> <tr> <td>3500K</td> <td>1453</td> <td>1350</td> <td>1721</td> </tr> <tr> <td>4000K</td> <td>1483</td> <td>1378</td> <td>1756</td> </tr> </tbody> </table>	CCT	8°	14°	34°	2700K	1318	1225	1561	3000K	1423	1322	1685	3500K	1453	1350	1721	4000K	1483	1378	1756	
CCT	8°	14°	34°																						
2700K	1318	1225	1561																						
3000K	1423	1322	1685																						
3500K	1453	1350	1721																						
4000K	1483	1378	1756																						
	<b>MAGIQ 8</b>	<b>A380506-</b>	qty																						
	Wattage: 26.6W	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)																			
	<b>DN</b> - Non Dim <b>DP</b> - Phase Dim <b>DV</b> - 0-10V	<b>27K</b> -2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	<input type="checkbox"/> ____ (2 colors)	<b>8 - 8°</b>  <b>14 - 14°</b>  <b>34 - 34°</b>	<table border="1"> <thead> <tr> <th>CCT</th> <th>8°</th> <th>14°</th> <th>34°</th> </tr> </thead> <tbody> <tr> <td>2700K</td> <td>1318</td> <td>1225</td> <td>1561</td> </tr> <tr> <td>3000K</td> <td>1423</td> <td>1322</td> <td>1685</td> </tr> <tr> <td>3500K</td> <td>1453</td> <td>1350</td> <td>1721</td> </tr> <tr> <td>4000K</td> <td>1483</td> <td>1378</td> <td>1756</td> </tr> </tbody> </table>	CCT	8°	14°	34°	2700K	1318	1225	1561	3000K	1423	1322	1685	3500K	1453	1350	1721	4000K	1483	1378	1756
	CCT	8°	14°	34°																					
	2700K	1318	1225	1561																					
3000K	1423	1322	1685																						
3500K	1453	1350	1721																						
4000K	1483	1378	1756																						
<b>MAGIQ 8 KORONA</b>	<b>A380509-</b>	qty																							
Wattage: 26.6W	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)																				
<b>DN</b> - Non Dim <b>DP</b> - Phase Dim <b>DV</b> - 0-10V	<b>27K</b> -2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	<input checked="" type="checkbox"/> ____ (28 colors)  <input type="checkbox"/> ____ (2 colors)	<b>8 - 8°</b>  <b>14 - 14°</b>  <b>34 - 34°</b>	<table border="1"> <thead> <tr> <th>CCT</th> <th>8°</th> <th>14°</th> <th>34°</th> </tr> </thead> <tbody> <tr> <td>2700K</td> <td>1318</td> <td>1225</td> <td>1561</td> </tr> <tr> <td>3000K</td> <td>1423</td> <td>1322</td> <td>1685</td> </tr> <tr> <td>3500K</td> <td>1453</td> <td>1350</td> <td>1721</td> </tr> <tr> <td>4000K</td> <td>1483</td> <td>1378</td> <td>1756</td> </tr> </tbody> </table>	CCT	8°	14°	34°	2700K	1318	1225	1561	3000K	1423	1322	1685	3500K	1453	1350	1721	4000K	1483	1378	1756	
CCT	8°	14°	34°																						
2700K	1318	1225	1561																						
3000K	1423	1322	1685																						
3500K	1453	1350	1721																						
4000K	1483	1378	1756																						
	<b>MAGIQ 8 + 8</b>	<b>A380515-</b>	qty																						
	Wattage: 53.2W	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)																			
	<b>DN</b> - Non Dim <b>DP</b> - Phase Dim <b>DV</b> - 0-10V	<b>27K</b> -2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	<input type="checkbox"/> ____ (2 colors)	<b>8 - 8°</b>  <b>14 - 14°</b>  <b>34 - 34°</b>	<table border="1"> <thead> <tr> <th>CCT</th> <th>8°</th> <th>14°</th> <th>34°</th> </tr> </thead> <tbody> <tr> <td>2700K</td> <td>2636</td> <td>2450</td> <td>3122</td> </tr> <tr> <td>3000K</td> <td>2846</td> <td>2645</td> <td>3371</td> </tr> <tr> <td>3500K</td> <td>2907</td> <td>2701</td> <td>3443</td> </tr> <tr> <td>4000K</td> <td>2966</td> <td>2756</td> <td>3513</td> </tr> </tbody> </table>	CCT	8°	14°	34°	2700K	2636	2450	3122	3000K	2846	2645	3371	3500K	2907	2701	3443	4000K	2966	2756	3513
	CCT	8°	14°	34°																					
	2700K	2636	2450	3122																					
3000K	2846	2645	3371																						
3500K	2907	2701	3443																						
4000K	2966	2756	3513																						

## HYPRO 40 RECESSED SYSTEM SPECIFICATION SHEET

PROJECT
TYPE
NOTES
QUANTITY
DATE

INSERTS

### MAGIQ

**FINISHES OPTIONS:**

See page 21 for color options and use 2 digit numbers to indicate your choices

MAGIQ 8 + 8 KORONA	A38914-				qty			
Wattage: 53.2W	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)			
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	◆ ____	<b>8</b> - 8°	<b>CCT</b>	<b>8°</b>	<b>14°</b>	<b>34°</b>
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K	(28 colors)		2700K	2636	2450	3122
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K	□ ____	<b>14</b> - 14°	3000K	2846	2645	3371
		<b>40K</b> - 4000K	(2 colors)		3500K	2907	2701	3443
					4000K	2966	2756	3513

### MAGIQ MICRO-DOT

MAGIQ 4 MICRO-DOT	A380492-				qty			
Wattage: 13.3W	Dimming	CCT - 90 CRI	Reflector	Delivered Lumen (lm)				
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	<b>22</b> - 22°	<b>CCT</b>	<b>22°</b>	<b>38°</b>		
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K		2700K	640	588		
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K	<b>38</b> - 38°	3000K	691	635		
		<b>40K</b> - 4000K		3500K	706	648		
				4000K	720	661		

MAGIQ 4 + 4 MICRO-DOT	A380502-				qty			
Wattage: 26.6W	Dimming	CCT - 90 CRI	Reflector	Delivered Lumen (lm)				
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	<b>22</b> - 22°	<b>CCT</b>	<b>22°</b>	<b>38°</b>		
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K		2700K	1280	1176		
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K	<b>38</b> - 38°	3000K	1382	1269		
		<b>40K</b> - 4000K		3500K	1411	1297		
				4000K	1440	1323		

MAGIQ 8 MICRO-DOT	A380126-				qty			
Wattage: 26.6W	Dimming	CCT - 90 CRI	Reflector	Delivered Lumen (lm)				
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	<b>22</b> - 22°	<b>CCT</b>	<b>22°</b>	<b>38°</b>		
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K		2700K	1280	1176		
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K	<b>38</b> - 38°	3000K	1382	1269		
		<b>40K</b> - 4000K		3500K	1411	1297		
				4000K	1440	1323		

MAGIQ 8 + 8 MICRO-DOT	A380521-				qty			
Wattage: 53.2W	Dimming	CCT - 90 CRI	Reflector	Delivered Lumen (lm)				
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	<b>22</b> - 22°	<b>CCT</b>	<b>22°</b>	<b>38°</b>		
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K		2700K	2560	2351		
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K	<b>38</b> - 38°	3000K	2763	2538		
		<b>40K</b> - 4000K		3500K	2822	2592		
				4000K	2880	2645		

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS

### MAGIQ WALLWASH

**FINISHES OPTIONS:**

See page 21 for color options and use 2 digit numbers to indicate your choices

MAGIQ HOLLOW WALLWASH	A380525-			qty	
Wattage: 18.7W	Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	□ ____	2700K	1270
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K	(2 colors)	3000K	1270
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K		3500K	1513
		<b>40K</b> - 4000K		4000K	1544

HOLLOW WALLWASH KORONA	A380528-			qty	
Wattage: 18.7W	Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	◆ ____	2700K	1270
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K	(28 colors)	3000K	1270
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K	□ ____	3500K	1513
		<b>40K</b> - 4000K	(2 colors)	4000K	1544

MAGIQ WALLWASH	A380531-			qty	
Wattage: 31.3W	Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	□ ____	2700K	2125
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K	(2 colors)	3000K	2260
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K		3500K	2429
		<b>40K</b> - 4000K		4000K	2564

### OIKO PRO IN

OIKO PRO IN 34°	A380282-			qty	
Wattage: 19.3W	Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	◆ ____	CCT	<b>34°</b>
	<b>DV</b> - 0-10V	<b>30K</b> - 3000K	▲ ____	2700K	1510
		<b>35K</b> - 3500K	(28 colors)	3000K	1517
		<b>40K</b> - 4000K		3500K	1588
				4000K	1603

OIKO PRO IN 36° TW	A380283-			qty	
Wattage: 14.4W	Finish			Delivered Lumen (lm)	
	◆ ____			<b>TUNABLE WHITE</b>	
	▲ ____			2700K - 6500K (MAX)	
	(28 colors)			36°	1081

## HYPRO 40 RECESSED SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS

### OIKO PRO IN

**FINISHES OPTIONS:**

See page 21 for color options and use 2 digit numbers to indicate your choices

OIKO PRO IN 50°		A380284-			qty	
Wattage: 19.3W		Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
	DN - Non Dim	27K - 2700K	◆ ____ ▲ ____ (28 colors)	CCT	50°	
	DV - 0-10V	30K - 3000K		2700K	1656	
		35K - 3500K		3000K	1665	
		40K - 4000K		3500K	1743	
				4000K	1759	
OIKO PRO IN 50° TW		A380285-			qty	
Wattage: 14.4W		Finish			Delivered Lumen (lm)	
	◆ ____			TUNABLE WHITE		
	▲ ____			2700K - 6500K (MAX)		
	(28 colors)	50°	1186			
OIKO PRO IN 60°		A380286-			qty	
Wattage: 19.3W		Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
	DN - Non Dim	27K - 2700K	◆ ____ ▲ ____ (28 colors)	CCT	60°	
	DV - 0-10V	30K - 3000K		2700K	1820	
		35K - 3500K		3000K	1829	
		40K - 4000K		3500K	1914	
				4000K	1932	
OIKO PRO IN 60° TW		A380287-			qty	
Wattage: 14.4W		Finish			Delivered Lumen (lm)	
	◆ ____			TUNABLE WHITE		
	▲ ____			2700K - 6500K (MAX)		
	(28 colors)	62°	1381			
OIKO PRO IN SUPERSPOT		A380290-			qty	
Wattage: 21.1W		Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
	DN - Non Dim	27K - 2700K	◆ ____ ▲ ____ (28 colors)	CCT	14°	
	DV - 0-10V	30K - 3000K		2700K	1278	
		35K - 3500K		3000K	1377	
		40K - 4000K		3500K	1432	
				4000K	1461	

## HYPRO 40 RECESSED SYSTEM SPECIFICATION SHEET


PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____


### OIKO PRO IN WALLWASH

#### FINISHES OPTIONS:


See page 21 for color options and use 2 digit numbers to indicate your choices


INSERTS

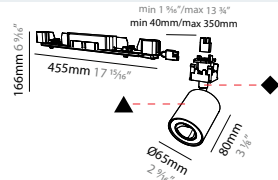
	<b>OIKO PRO IN WALLWASH</b>	<b>A380288-</b>	qty			
	Wattage: 19.3W	Dimming	CCT - 90 CRI	Finish		Delivered Lumen (lm)
	<b>DN - Non Dim</b>	<b>27K - 2700K</b>	◆ —			2700K   1624
	<b>DV - 0-10V</b>	<b>30K - 3000K</b>	▲ —			3000K   1632
		<b>35K - 3500K</b>	(28 colors)			3500K   1708
	<b>40K - 4000K</b>				4000K   1724	

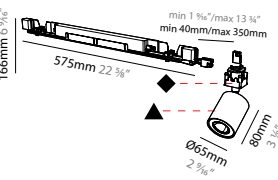	<b>OIKO PRO IN WALLWASH TW</b>	<b>A380289-</b>	qty		
	Wattage: 14.4W	Finish			Delivered Lumen (lm)
	◆ —			<b>TUNABLE WHITE</b>	
	▲ —			2700K - 6500K (MAX)	
	(28 colors)			1162	

### RICO

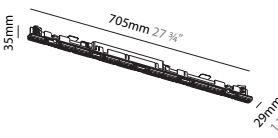	<b>RICO 705</b>	<b>A380432-</b>	qty			
	Wattage: 16.3W	Dimming	CCT - 90 CRI	Reflector		Delivered Lumen (lm)
	<b>DN - Non Dim</b>	<b>27K - 2700K</b>	<b>46 - 46°</b>			CCT   46°   62°
	<b>DV - 0-10V</b>	<b>30K - 3000K</b>	<b>62 - 62°</b>			2700K   1934   1695
		<b>35K - 3500K</b>				3000K   1981   1737
	<b>40K - 4000K</b>				3500K   2057   1803	
					4000K   2099   1840	

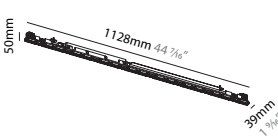	<b>RICO 1128</b>	<b>A380440-</b>	qty			
	Wattage: 26W	Dimming	CCT - 90 CRI	Reflector		Delivered Lumen (lm)
	<b>DN - Non Dim</b>	<b>27K - 2700K</b>	<b>46 - 46°</b>			CCT   46°   62°
	<b>DV - 0-10V</b>	<b>30K - 3000K</b>	<b>62 - 62°</b>			2700K   3095   2713
		<b>35K - 3500K</b>				3000K   3170   2779
	<b>40K - 4000K</b>				3500K   3291   2885	
					4000K   3358   2944	

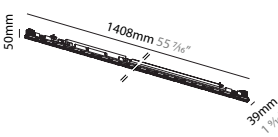	<b>RICO 1408</b>	<b>A380448-</b>	qty			
	Wattage: 32.6W	Dimming	CCT - 90 CRI	Reflector		Delivered Lumen (lm)
	<b>DN - Non Dim</b>	<b>27K - 2700K</b>	<b>46 - 46°</b>			CCT   46°   62°
	<b>DV - 0-10V</b>	<b>30K - 3000K</b>	<b>62 - 62°</b>			2700K   3868   3391
		<b>35K - 3500K</b>				3000K   3962   3473
	<b>40K - 4000K</b>				3500K   4113   3605	
					4000K   4197   3679	



## HYPRO 40 RECESSED SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS

### SIGN DIVA TUBE

#### FINISHES OPTIONS:

See page 21 for color options and use 2 digit numbers to indicate your choices

SIGN DIVA Ø400	A380534-					qty				
	Wattage: 17.2W	Dimming	CCT - 90 CRI	Finish	Shine Ring	Diffuser	Delivered Lumen (lm)			
	DN - Non Dim	27K -2700K	◆ ____	○ ____	____ (4 options) Use 2 digit numbers below 	Diffuser	01	02	03	04
	DV - 0-10V	30K - 3000K	▲ ____	(6 colors)		2700K	1807	1611	1868	1656
		35K - 3500K	(28 colors)	No shine ring: indicate with 00		3000K	1943	1733	2009	1781
		40K - 4000K				3500K	1959	1747	2025	1796
						4000K	1991	1776	2058	1825

SIGN DIVA Ø400 KORONA	A380538-					qty				
	Wattage: 17.2W	Dimming	CCT - 90 CRI	Finish	Diffuser	Delivered Lumen (lm)				
	DN - Non Dim	27K -2700K	◆ ____	____ (4 options) Use 2 digit numbers below 	Diffuser	01	02	03	04	
	DV - 0-10V	30K - 3000K	▲ ____		2700K	1807	1611	1868	1656	
		35K - 3500K	(28 colors)		3000K	1943	1733	2009	1781	
		40K - 4000K			3500K	1959	1747	2025	1796	
					4000K	1991	1776	2058	1825	

SIGN DIVA Ø570	A380542-					qty				
	Wattage: 48.6W	Dimming	CCT - 90 CRI	Finish	Shine Ring	Diffuser	Delivered Lumen (lm)			
	DN - Non Dim	27K -2700K	◆ ____	○ ____	____ (4 options) Use 2 digit numbers below 	Diffuser	01	02	03	04
	DV - 0-10V	30K - 3000K	▲ ____	(6 colors)		2700K	4978	4439	5145	4563
		35K - 3500K	(28 colors)	No shine ring: indicate with 00		3000K	5337	4759	5516	4892
		40K - 4000K				3500K	5382	4799	5563	4933
						4000K	5494	4899	5679	5035

SIGN DIVA Ø570 KORONA	A380546-					qty				
	Wattage: 17.2W	Dimming	CCT - 90 CRI	Finish	Diffuser	Delivered Lumen (lm)				
	DN - Non Dim	27K -2700K	◆ ____	____ (4 options) Use 2 digit numbers below 	Diffuser	01	02	03	04	
	DV - 0-10V	30K - 3000K	▲ ____		2700K	4978	4439	5145	4563	
		35K - 3500K	(28 colors)		3000K	5337	4759	5516	4892	
		40K - 4000K			3500K	5382	4799	5563	4933	
					4000K	5494	4899	5679	5035	

### SNOOKER

SNOOKER	A380420-					qty				
	Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Shine Ring	Reflector	Cable	Delivered Lumen (lm)		
	DN - Non Dim	27K -2700K	◆ ____	○ ____	____ (6 colors) No shine ring: indicate with 00	32 - 32° 58 - 58°	T ____ (5 colors/ 2 lengths)	CCT	32°	58°
	DV - 0-10V	30K - 3000K	(28 colors)	2700K				283	310	
		35K - 3500K		3000K				300	328	
		40K - 4000K		3500K				317	347	
				4000K				325	356	

## HYPRO 40 RECESSED SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

### SNOOKER

#### FINISHES OPTIONS:

See page 21 for color options and use 2 digit numbers to indicate your choices

INSERTS

SNOOKER METAL	A380428-						qty		
Wattage: 6.4W	Dimming	CCT - 90 CRI	Shine Ring	Reflector	Cable	Delivered Lumen (lm)			
	DN - Non Dim	27K - 2700K	 (6 colors) No shine ring: indicate with 00	32 - 32°	 (5 colors/ 2 lengths)	CCT	32°	58°	
	DV - 0-10V	30K - 3000K		2700K		283	310		
	35K - 3500K	3000K		300		328			
	40K - 4000K	3500K		317		347			
		4000K		325		356			

COMPONENTS



COVER BLACK	qty		
	Length	Lengths are pre cut at the factory.	
	A38892 - 1000mm		
	A38893 - 2000mm		
	A38894 - 3000mm		

KORONA PROFILE	A38895-			qty
	Finish	Colored decorative cover profile, max length of a single run is 3000mm 118 1/8\".		
	◆	Lengths are pre cut at the factory.		
	(28 colors)			

## HYPRO 40 RECESSED SYSTEM SPECIFICATION SHEET

### RECOMMENDED WALLWASH DISTANCES

Simplified diagrams - it does not reflect the specific photometry of the inserts.  
 Setback and on center spacing depends on the color and texture of your walls.  
 The calculations below were completed with a white wall.

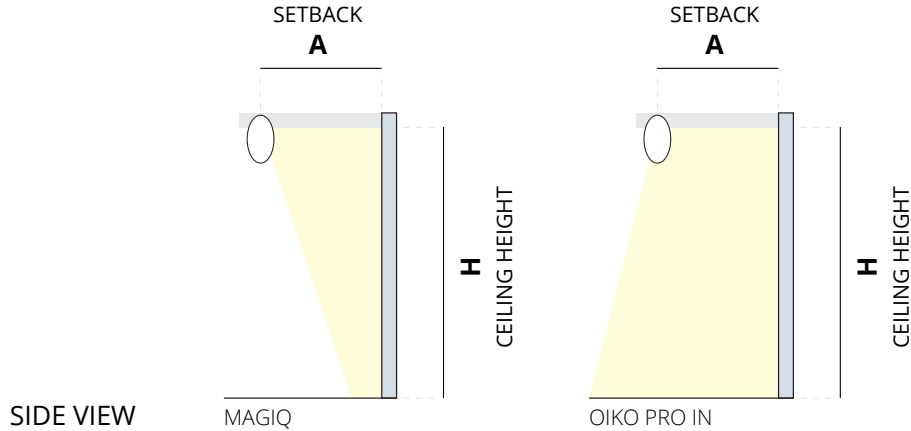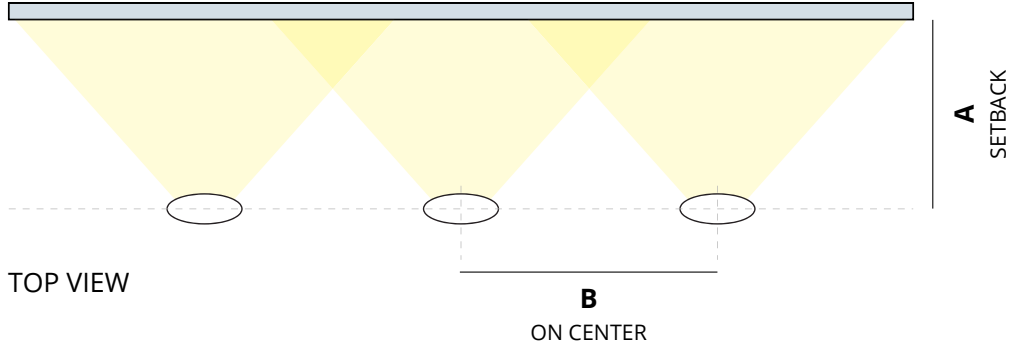

MAGIQ HOLLOW WALLWASH			MAGIQ WALLWASH			OIKO PRO IN WALLWASH		
H	A	B	H	A	B	H	A	B
7' 6.5"	17.5" - 29"	25" - 43"	9' 10"	32" - 35"	40" - 48"	7' 6.5"	18" - 30"	27.5" - 45"
8' 2.5"	19" - 32"	28" - 47"	11' 6"	35" - 40"	48" - 56"	8' 2.5"	19.5" - 33.5"	29.5" - 49"
8' 10"	21" - 34"	31" - 51"	13'	40" - 48"	56" - 63"	8' 10"	21.5" - 35.5"	31.5" - 53"
9' 10"	22.5" - 37.5"	34" - 55"	14' 9"	48" - 56"	63" - 71"	9' 10"	23.5" - 39"	35.5" - 59"

## HYPRO 40 RECESSED SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

### SYSTEM SUMMARY

#### System

##### Type

Recessed (Non-IC type)  
Rated for Dry Locations Ceiling and Wall Mounted

##### Approval Status

Certified to North American Standards

##### Emission

Refer to emission icon beside each light insert and symbol legend for descriptions

##### Efficiency

Acrylic opal diffuser (snap-in) lens 43%  
Micro-prismatic diffuser (snap-in) lens 53%  
Rico-cover diffuser (snap-in) lens

#### Profile

##### Measurement

w 50mm (1 1/8") x ht. 76mm (3")

##### Housing

Anodized extruded aluminum profile available per meter and field-cuttable  
Profiles have a maximum length of 3000mm (9' 10 1/8") and joined together with couplers to ensure uniform appearance and easy installation

##### Cutout

w 43mm (1 1/8") ±1mm x Profile Length + 30mm (1 3/8")

##### Drywall Ceiling Thickness

Installation clips function with drywall thickness between 10mm (3/8") - 25mm (1")

##### Recessed Depth

h 100mm (3 1/8")

#### Electrical

##### Connections

Luminaries are pre-wired with a factory installed branch circuit wiring and quick-release connectors  
Through wiring is used to connect the luminaries

##### Power Feed

Located 2 inches from one end of the fixture, on top of the profile  
If a different location is required, please specify  
3 Wires - non-dimming or phase dimming  
4 Wires - two circuits of non-dimming or phase dimming  
5 Wires - 0-10V dimming or dali dimming

##### LED Driver

Integrated with inserts  
Electronic Class 2 driver, Universal 120V/277V  
Non Dimming Driver, Dimming Driver 0-10V (10-100%)  
Consult factory for driver cutsheet  
If a different driver is required, please specify

##### Emergency Inverter Compatible

To be installed remotely, and provided by others  
It can be located up to 250m away from the fixture

Emergency circuit wiring is available upon request (Isolated track with dedicated driver used for emergency circuit will connect to emergency battery pack - supplied by others)

#### General

##### Features

Korona Cone is a glare-reduction cone that sits in front of the reflector - available in 29 standard colors, thus creating a special decorative effect

LFO lenses ensure a glare free downlight without illuminating the luminaries housing and the lowest UGR ratings perfect for residential and hospitality applications

Rico lines use special micro reflectors that improve efficiency and achieve extremely low UGR values (some cases less than 0)

Hadi fixtures with indirect lighting have clearly defined openings in the back to create a subtle glow

##### Custom Requests and Additional Options

Availability depends by insert, system, and configuration  
Must consult factory and allow up to 5 business days for an answer

Special beam angles, special LEDs, CRI 90, RGB-W, tunable, light inserts with different outputs, light inserts on different circuits

Special LEDs optimize luminaries to meet different applications

Gold+ invokes a heavy golden tone intended for bread and pastries


Meat+ displays saturated red light (white parts of product will appear slightly red)

Art+ highlights pieces of art without adversely affecting the perception of individual colors

Fashion+ has the entire color spectrum brilliantly orchestrated without distorting the color temperature

##### Configuration

Consult factory for patterns or custom designs  
Provide configuration drawings

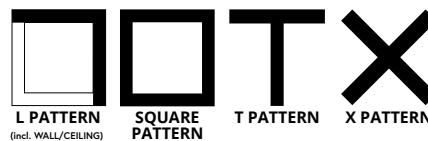

\*Shop drawings provided upon receiving purchase order

#### Warranty

ZANEEN provides a limited warranty from date of purchase to original purchaser

**LED Inserts:** 5 year tested for 50,000 hours at 70% lumen output (L70)

**LED Driver:** 5 year

**Non-Electrical Components:** 1 year

\*Check boxes to complete specification order and submit to quotes@zaneen.com to receive a formal BOM and a finalized model number

\*In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

## HYPRO 40 RECESSED SYSTEM SPECIFICATION SHEET

PROJECT \_\_\_\_\_  
 TYPE \_\_\_\_\_  
 NOTES \_\_\_\_\_  
 QUANTITY \_\_\_\_\_  
 DATE \_\_\_\_\_


### FINISH COLORS




Sparkling Silver - 01



Black Velvet - 02



Crystal White - 03



Creamy - 04



Hampton Bay - 05



Urban Forest - 07



In the Army - 08




Rusty Angel - 09



Fade to Grey - 12



Mysterious Grey - 13



Lost Dream - 15



Purple Sky - 16



Fresh Oh - 17




Funky P - 18



Kissing Aphrodite - 19




Poseidon's Paradise - 20




Blue Sky - 21



Spring Green - 22



Mellow Yellow - 23



Golden Heart - 24



Gun Metal - 25



Champagne Cream - 26



Copper Mine - 27



Ancient Bronze - 28




Jazz Gold - 29



Olive Breeze - 30



Moonlight Silver - 31



Rosewood Red - 32




### FRAME



Black - 02



White - 03



### SHINE RING



Opal - 01



Yellow - 02



Orange - 03



Red - 04



Blue - 05



Green - 06



### CABLE (COLORS/LENGTH)



Black/2m 01



Black/4m 02



White/2m 03



White/4m 04



Orange/2m 05



Orange/4m 06



Red/2m 07



Red/4m 08



Green/2m 09



Green/4m 10



**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

**Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.

**Gun Metal:** No Gun Metal finish is alike. It combines a mixture of transparent and black color particles which ensures a highly individual effect and no luminaire being identical.

**Champagne Cream, Copper Mine, Ancient Bronze + Jazz Gold:** These finishes have slight fading from specific powder coating production. Each luminaire will slightly vary.

RAL Color Upon Request



### LEGEND

	floor-mounted		pivotable		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

### IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

### IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

### WIRING DIAGRAMS


ALL ZANEEN FIXTURES ARE MANUFACTURED TO NORTH AMERICAN ELECTRICAL STANDARDS

Post Sales Support  
HQ 1-800-388-3382 X 625 support@zaneen.com


#### IMPORTANT

- Do NOT connect directly to line voltage
- There is a minimum and maximum load per driver (See fixture and driver specifications).
- Fixture MUST be connected to LED driver, prior to turning power on

#### PHASE/NON-DIMMING WIRING DIAGRAM

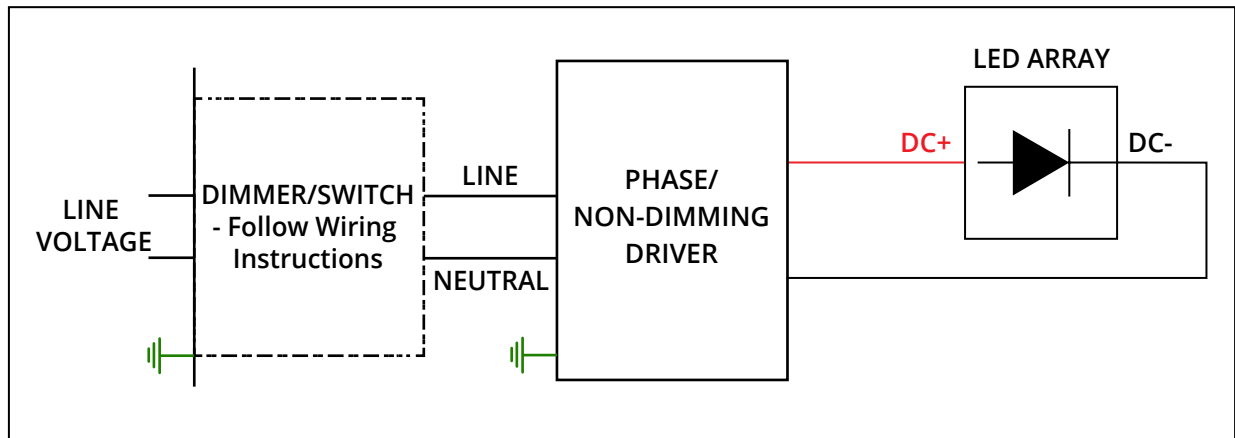

#### 0-10V DIMMING WIRING DIAGRAM

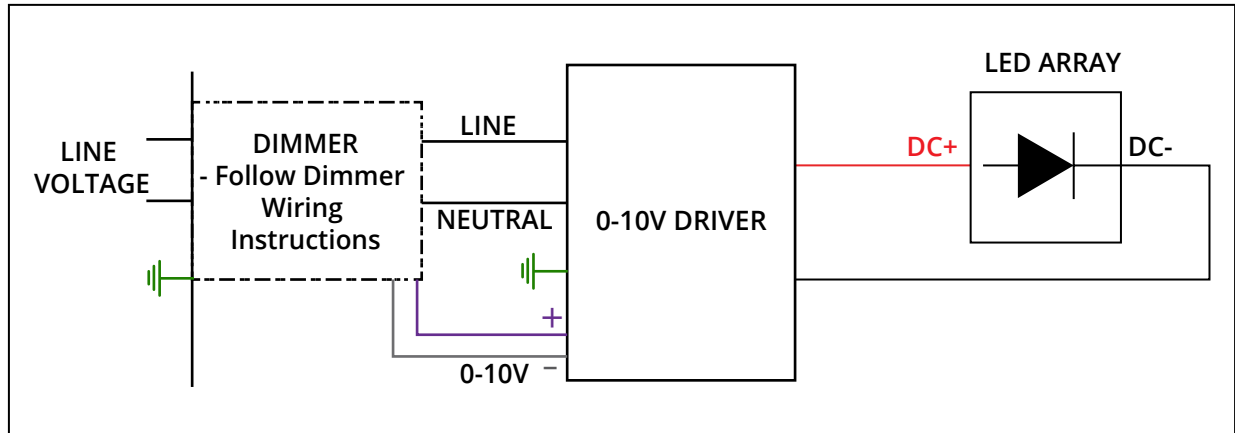

## HYPRO 40 RECESSED SYSTEM SPECIFICATION SHEET

PROJECT \_\_\_\_\_  
TYPE \_\_\_\_\_  
NOTES \_\_\_\_\_  
QUANTITY \_\_\_\_\_  
DATE \_\_\_\_\_

Insert custom drawing here or attach with additional pages

