

HYPRO 40 SURFACE SYSTEM SPECIFICATION SHEET



PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____




ARCHITECTURAL | HYPRO 40

HYPRO 40 creates unique new levels of lighting structure: The individually configurable surface profile can run around and across walls and ceilings, creating three-dimensional continuous lines of light. Both general and accent lighting can be integrated into the profile at the same time. With this freedom, the lighting can adapt perfectly to the interior design and structure of the room.

The system is equipped with the innovative Rico reflectors, achieving the highest efficiency with a unique glare-free. With additional inserts such as the MAGIQ family, homogeneous illumination is guaranteed. For the most comfortable lighting scenario and greater flexibility, tunable white is available within the system spotlights CENTRIQ IN and OIKO PRO IN.



SYSTEM PROFILE

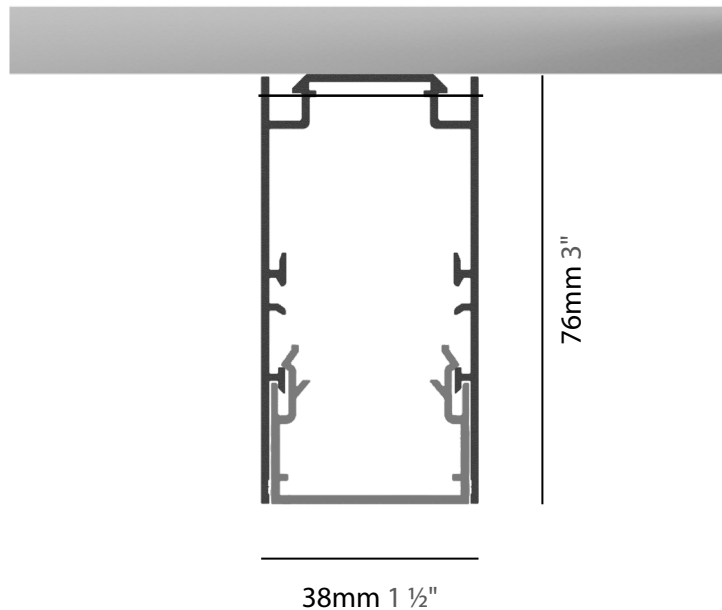

HYPRO 40 SURFACE SYSTEM SPECIFICATION SHEET

PROJECT _____
 TYPE _____
 NOTES _____
 QUANTITY _____
 DATE _____

SYSTEM GUIDE

To make your product selection and complete system specification, proceed with the following: review system options, create your system code in the field below and include your quantity. For the inserts and components, use the field beside each product name. Submit to quotes@zaneen.com to receive a formal BOM and finalized model numbers.

EXAMPLE A3HY40-SUR-SYS-UNV-DN-10"-S-01-01

UPON REQUEST
 Additional Options _____
 _____ Color Temperature
 _____ RGB-W / Tunable
 _____ Lumen Outputs
 _____ Beam Angle
 _____ Special LED
 _____ CRI



SYSTEM BUILD CODE: A3HY40-SUR-SYS- qty

ELECTRICAL	Voltage	Dimming	Circuit
	UNV - 120/277V	DN - Non Dim	EMCIR - Emergency Circuit
	120 - 120V	DP - Phase Dim (Triac/ELV)	
	347 - 347V	DV - 0-10V (100-1%)	
		DD - DALI (100-1%)	

LAYOUT	Fixture Head Spacing* (approx.)	Run Shapes	System Finish
	10" - on center	S _____' Straight	Profile ◆ _____ (28 colors)
	20" - on center	L _____'x_____ ' Ceiling to Ceiling	End Cap ◆ _____ (28 colors)
	30" - on center	LV _____'x_____ ' Ceiling to Wall	
	40" - on center	U _____'x_____ 'x_____ '	
	CUS (XX) - Custom	R _____'x_____ ' Rectangle	
	T _____'x_____ '		
	X _____'x_____ '		

*Dependent on fixture specified and length of integral driver

INSERTS	CENTRIQ	INSERT BUILD CODE EXAMPLE: A38897-DN-27K-01-01-01-24			FINISHES OPTIONS: See page 21 for color options and use 2 digit numbers to indicate your choices			
	CENTRIQ Ø30	A38897-	qty					
	Wattage: 4.4W	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)		
		DN - Non Dim	27K - 2700K	◆ _____	24 - 24°	CCT	24°	32°
		DV - 0-10V	30K - 3000K	▲ _____	32 - 32°	2700K	264	236
			35K - 3500K	● _____		3000K	279	249
			40K - 4000K	(28 colors)		3500K	295	263
						4000K	302	270
	CENTRIQ Ø40 SUPERSPOT	A38898-	qty					
	Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)			
	DN - Non Dim	27K - 2700K	◆ _____	CCT	12°			
	DV - 0-10V	30K - 3000K	▲ _____	2700K	378			
		35K - 3500K	● _____	3000K	400			
		40K - 4000K	(28 colors)	3500K	422			
				4000K	433			

HYPRO 40 SURFACE SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

CENTRIQ

FINISHES OPTIONS:

See page 21 for color options and use 2 digit numbers to indicate your choices

INSERTS

CENTRIQ Ø40	A38899-					qty
Wattage: 6.5W	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)	
	DN - Non Dim	27K -2700K	◆ ___	22 - 22°	CCT	22° 30° 34° 38° 48°
	DV - 0-10V	30K - 3000K	▲ ___	30 - 30°	2700K	519 501 379 480 472
		35K - 3500K	● ___	34 - 34°	3000K	544 524 397 502 494
		40K - 4000K	(28 colors)	38 - 38°	3500K	545 525 398 503 495
				48 - 48°	4000K	575 555 420 531 523

CENTRIQ Ø55 SUPERSPOT	A38900-					qty
Wattage: 9.1W	Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)		
	DN - Non Dim	27K -2700K	◆ ___	CCT		8°
	DV - 0-10V	30K - 3000K	▲ ___	2700K		474
		35K - 3500K	● ___	3000K		502
		40K - 4000K	(28 colors)	3500K		530
				4000K		553

CENTRIQ Ø55	A380465-					qty
Wattage: 12W	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)	
	DN - Non Dim	27K -2700K	◆ ___	18 - 18°	CCT	18° 26° 34° 36° 52°
	DV - 0-10V	30K - 3000K	▲ ___	26 - 26°	2700K	772 663 795 828 843
		35K - 3500K	● ___	34 - 34°	3000K	808 694 832 867 882
		40K - 4000K	(28 colors)	36 - 36°	3500K	838 719 863 899 915
				52 - 52°	4000K	857 735 882 919 935

CENTRIQ DOUBLE Ø30	A38902-					qty
Wattage: 8.8W	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)	
	DN - Non Dim	27K -2700K	◆ ___	24 - 24°	CCT	24° 32°
	DV - 0-10V	30K - 3000K	▲ ___	32 - 32°	2700K	527 471
		35K - 3500K	● ___		3000K	558 499
		40K - 4000K	(28 colors)		3500K	589 527
					4000K	605 541

CENTRIQ DOUBLE Ø40 SUPERSPOT	A38903-					qty
Wattage: 12.8W	Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)		
	DN - Non Dim	27K -2700K	◆ ___	CCT		12°
	DV - 0-10V	30K - 3000K	▲ ___	2700K		755
		35K - 3500K	● ___	3000K		800
		40K - 4000K	(28 colors)	3500K		844
				4000K		867

HYPRO 40 SURFACE SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS

CENTRIQ

FINISHES OPTIONS:

See page 21 for color options and use 2 digit numbers to indicate your choices

CENTRIQ DOUBLE Ø40	A38904-					qty
Wattage: 13.1W	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)	
	DN - Non Dim	27K - 2700K	◆ ___	22 - 22°	CCT 22° 30° 34° 38° 48°	
	DV - 0-10V	30K - 3000K	▲ ___	30 - 30°	2700K 1039 1001 759 960 944	
		35K - 3500K	● ___	34 - 34°	3000K 1088 1048 794 1004 988	
		40K - 4000K	(28 colors)	38 - 38°	3500K 1090 1051 796 1007 990	
				48 - 48°	4000K 1151 1109 841 1063 1045	

CENTRIQ DOUBLE Ø55 SUPERSPOT	A38905-					qty
Wattage: 18.2W	Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)		
	DN - Non Dim	27K - 2700K	◆ ___	CCT 8°		
	DV - 0-10V	30K - 3000K	▲ ___	2700K 948		
		35K - 3500K	● ___	3000K 1004		
		40K - 4000K	(28 colors)	3500K 1060		
				4000K 1105		

CENTRIQ DOUBLE Ø55	A38906-					qty
Wattage: 23.9W	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)	
	DN - Non Dim	27K - 2700K	◆ ___	18 - 18°	CCT 18° 26° 34° 36° 52°	
	DV - 0-10V	30K - 3000K	▲ ___	26 - 26°	2700K 1545 1326 1590 1657 1686	
		35K - 3500K	● ___	34 - 34°	3000K 1616 1387 1664 1733 1764	
		40K - 4000K	(28 colors)	36 - 36°	3500K 1677 1439 1726 1798 1830	
				52 - 52°	4000K 1714 1471 1764 1838 1871	

CENTRIQ IN Ø65	A380330-					qty
Wattage: 23W	Dimming	CCT - 90 CRI	Finish	Reflector	Optics	Delivered Lumen (lm)
	DN - Non Dim	27K - 2700K	◆ ___	24 - 24°	00 - No optic	CCT 24° 36° 52°
	DV - 0-10V	30K - 3000K	▲ ___	36 - 36°	01 - Linear Spread	2700K 1946 2016 1975
		35K - 3500K	(28 colors)	52 - 52°	02 - Spread	3000K 2026 2099 2056
		40K - 4000K			03 - Honeycomb	3500K 2113 2189 2145
						4000K 2211 2291 2245

CENTRIQ IN Ø65 TW	A380331-					qty
Wattage: 14.4W	Finish	Reflector	Optics	Delivered Lumen (lm)		
	◆ ___	18 - 18°	00 - No optic	TUNABLE WHITE		
	▲ ___	34 - 34°	01 - Linear Spread	2700K - 6500K (MAX)		
	(28 colors)	54 - 54°	02 - Spread	18°	1202	
			03 - Honeycomb	34°	1251	
				54°	1269	

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

INSERTS

CENTRIQ

FINISHES OPTIONS:

See page 21 for color options and use 2 digit numbers to indicate your choices

CENTRIQ IN Ø65 SUPERSPOT		A380333-				qty				
Wattage: 21.1W		Dimming	CCT - 90 CRI	Finish	Optics	Delivered Lumen (lm)				
		DN - Non Dim	27K - 2700K	◆ ___	00 - No optic	CCT	12°			
		DV - 0-10V	30K - 3000K	▲ ___	01 - Linear Spread	2700K	1483			
			35K - 3500K	(28 colors)	02 - Spread	3000K	1465			
			40K - 4000K		03 - Honeycomb	3500K	1553			
						4000K	1554			
CENTRIQ IN Ø65 FLEX		A380332-				qty				
Wattage: 20.5W		Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)					
		DN - Non Dim	27K - 2700K	◆ ___	CCT					
		DV - 0-10V	30K - 3000K	▲ ___	14° - 44°					
			35K - 3500K	(28 colors)	2700K	1205 - 1127				
			40K - 4000K		3000K	1298 - 1214				
					3500K	1376 - 1287				
			4000K	1377 - 1288						
CENTRIQ IN Ø83		A380335-				qty				
Wattage: 36.2W		Dimming	CCT - 90 CRI	Finish	Reflector	Optics	Delivered Lumen (lm)			
		DN - Non Dim	27K - 2700K	◆ ___	20 - 20°	00 - No optic	CCT	20°	32°	54°
		DV - 0-10V	30K - 3000K	▲ ___	32 - 32°	01 - Linear Spread	2700K	2923	3030	2916
			35K - 3500K	(28 colors)	54 - 54°	02 - Spread	3000K	3044	3156	3037
			40K - 4000K			03 - Honeycomb	3500K	3173	3290	3166
							4000K	3328	3450	3320
CENTRIQ IN Ø83 TW		A380336-				qty				
Wattage: 34.9W		Finish	Reflector	Optics	Delivered Lumen (lm)					
		◆ ___	24 - 24°	00 - No optic	TUNABLE WHITE					
		▲ ___	34 - 34°	01 - Linear Spread	2700K - 6500K (MAX)					
		(28 colors)	54 - 54°	02 - Spread	24°	2893				
				03 - Honeycomb	34°	2907				
					54°	2805				
CENTRIQ IN Ø83 SUPERSPOT		A380339-				qty				
Wattage: 25.7W		Dimming	CCT - 90 CRI	Finish	Optics	Delivered Lumen (lm)				
		DN - Non Dim	27K - 2700K	◆ ___	00 - No optic	CCT	12°			
		DV - 0-10V	30K - 3000K	▲ ___	01 - Linear Spread	2700K	1609			
			35K - 3500K	(28 colors)	02 - Spread	3000K	1733			
			40K - 4000K		03 - Honeycomb	3500K	1838			
						4000K	1839			

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS

CENTRIQ

FINISHES OPTIONS:

See page 21 for color options and use 2 digit numbers to indicate your choices

	CENTRIQ IN Ø83 SUPERSPOT TW	A380340-			qty
	Wattage: 8.2W	Finish	Optics		Delivered Lumen (lm)
	◆ ____ ▲ ____ (28 colors)			00 - No optic 01 - Linear Spread 02 - Spread 03 - Honeycomb	TUNABLE WHITE 2700K - 6500K (MAX)
					10° 569

	CENTRIQ IN Ø83 FLEX	A380337-			qty
	Wattage: 20.5W	Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)
	◆ ____ ▲ ____ (28 colors)	DN - Non Dim DV - 0-10V	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K		CCT 14° - 44°
					2700K 2923 3000K 3044 3500K 3261 4000K 3328

	CENTRIQ IN Ø83 FLEX TW	A380338-			qty
	Wattage: 8.2W	Finish			Delivered Lumen (lm)
	◆ ____ ▲ ____ (28 colors)				TUNABLE WHITE 2700K - 6500K (MAX)
					14° - 46° 479 - 451

HADI

	HADI-M SUSPENDED	A380551-			qty
	Wattage: 37.3W	Dimming	CCT - 90 CRI	Finish	Cable Length
	◆ ____ ▲ ____ (28 colors)	DN - Non Dim DP - Phase Dim DV - 0-10V	30K - 3000K 35K - 3500K 40K - 4000K		01 - 2000mm 02 - 6000mm
					3000K 4269 3500K 4311 4000K 4352

	HADI-M SUSPENDED DIR/IND	A380555-			qty
	Wattage: 77.8W	Dimming	CCT - 90 CRI	Finish	Cable Length
	◆ ____ ▲ ____ (28 colors)	DN - Non Dim DP - Phase Dim DV - 0-10V	30K - 3000K 35K - 3500K 40K - 4000K		01 - 2000mm 02 - 6000mm
					3000K 5998 3500K 6059 4000K 6119

HYPRO 40 SURFACE SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS	HADI		FINISHES OPTIONS: See page 21 for color options and use 2 digit numbers to indicate your choices			
		HADI-Q SUSPENDED	A380559-			qty
Wattage: 37.3W		Dimming	CCT - 90 CRI	Finish	Cable Length	Delivered Lumen (lm)
DN - Non Dim DP - Phase Dim DV - 0-10V		30K - 3000K	◆ ___	01 - 2000mm 02 - 6000mm	3000K	3911
		35K - 3500K	▲ ___		3500K	3949
	40K - 4000K	(28 colors)	4000K		3987	
	HADI-Q SUSPENDED DIR/IND	A380563-			qty	
	Wattage: 77.8W	Dimming	CCT - 90 CRI	Finish	Cable Length	Delivered Lumen (lm)
	DN - Non Dim DP - Phase Dim DV - 0-10V	30K - 3000K	◆ ___	01 - 2000mm 02 - 6000mm	3000K	5783
		35K - 3500K	▲ ___		3500K	5841
40K - 4000K		(28 colors)	4000K		5899	
	HADI-M INTEGRATED	A380567-			qty	
	Wattage: 37.3W	Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
	DN - Non Dim DP - Phase Dim DV - 0-10V	30K - 3000K	◆ ___	(28 colors)	3000K	4269
		35K - 3500K			3500K	4311
40K - 4000K			4000K		4352	
	HADI-M INTEGRATED DIR/IND	A380571-			qty	
	Wattage: 77.8W	Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
	DN - Non Dim DP - Phase Dim DV - 0-10V	30K - 3000K	◆ ___	(28 colors)	3000K	5998
		35K - 3500K			3500K	6059
40K - 4000K			4000K		6119	
	HADI-Q INTEGRATED	A380575-			qty	
	Wattage: 37.3W	Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
	DN - Non Dim DP - Phase Dim DV - 0-10V	30K - 3000K	◆ ___	(28 colors)	3000K	3911
		35K - 3500K			3500K	3949
40K - 4000K			4000K		3987	

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS

HADI

FINISHES OPTIONS:

See page 21 for color options and use 2 digit numbers to indicate your choices

HADI-Q INTEGRATED DIR/IND		A380579-			qty	
Wattage: 77.8W		Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
	DN - Non Dim	30K - 3000K	◆ ____ (28 colors)	3000K	5783	
	DP - Phase Dim	35K - 3500K		3500K	5841	
	DV - 0-10V	40K - 4000K		4000K	5899	

HANGOVER PLUG

HANGOVER PLUG Ø28 H:150		A380378-					qty					
Wattage: 6.4W		Dimming	CCT - 90 CRI	Finish	Shine Ring	Reflector	Cable	Delivered Lumen (lm)				
	DN - Non Dim	27K - 2700K	◆ ____ ▲ ____ (28 colors)	○ ____ (6 colors) No shine ring: indicate with 00	20 - 20°	26 - 26°	56 - 56°	┌ ____ (5 colors/ 2 lengths)	CCT	20°	26°	56°
	DV - 0-10V	30K - 3000K							2700K	403	397	381
		35K - 3500K							3000K	427	420	404
		40K - 4000K							3500K	451	443	426
			4000K	463	455	438						

HANGOVER PLUG Ø28 H:300		A380380-					qty					
Wattage: 6.4W		Dimming	CCT - 90 CRI	Finish	Shine Ring	Reflector	Cable	Delivered Lumen (lm)				
	DN - Non Dim	27K - 2700K	◆ ____ ▲ ____ (28 colors)	○ ____ (6 colors) No shine ring: indicate with 00	20 - 20°	26 - 26°	56 - 56°	┌ ____ (5 colors/ 2 lengths)	CCT	20°	26°	56°
	DV - 0-10V	30K - 3000K							2700K	403	397	381
		35K - 3500K							3000K	427	420	404
		40K - 4000K							3500K	451	443	426
			4000K	463	455	438						

HANGOVER PLUG Ø28 H:450		A380382-					qty					
Wattage: 6.4W		Dimming	CCT - 90 CRI	Finish	Shine Ring	Reflector	Cable	Delivered Lumen (lm)				
	DN - Non Dim	27K - 2700K	◆ ____ ▲ ____ (28 colors)	○ ____ (6 colors) No shine ring: indicate with 00	20 - 20°	26 - 26°	56 - 56°	┌ ____ (5 colors/ 2 lengths)	CCT	20°	26°	56°
	DV - 0-10V	30K - 3000K							2700K	403	397	381
		35K - 3500K							3000K	427	420	404
		40K - 4000K							3500K	451	443	426
			4000K	463	455	438						

HANGOVER PLUG Ø40 H:150		A380384-					qty			
Wattage: 9.8W		Dimming	CCT - 90 CRI	Finish	Shine Ring	Reflector	Cable	Delivered Lumen (lm)		
	DN - Non Dim	27K - 2700K	◆ ____ ▲ ____ (28 colors)	○ ____ (6 colors) No shine ring: indicate with 00	40 - 40°	52 - 52°	┌ ____ (5 colors/ 2 lengths)	CCT	40°	52°
	DV - 0-10V	30K - 3000K						2700K	694	684
		35K - 3500K						3000K	726	716
		40K - 4000K						3500K	753	742
			4000K	770	759					

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS

HANGOVER PLUG

FINISHES OPTIONS:

See page 21 for color options and use 2 digit numbers to indicate your choices

	HANGOVER PLUG Ø40 H:300	A380386-						qty		
	Wattage: 9.8W	Dimming	CCT - 90 CRI	Finish	Shine Ring	Reflector	Cable	Delivered Lumen (lm)		
	DN - Non Dim DV - 0-10V	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	◆ ____ ▲ ____ (28 colors)	○ ____ (6 colors) No shine ring: indicate with 00	40 - 40° 52 - 52°	┌ ____ (5 colors/ 2 lengths)		CCT	40°	52°
								2700K	694	684
								3000K	726	716
								3500K	753	742
								4000K	770	759

	HANGOVER PLUG Ø40 H:450	A380388-						qty		
	Wattage: 9.8W	Dimming	CCT - 90 CRI	Finish	Shine Ring	Reflector	Cable	Delivered Lumen (lm)		
	DN - Non Dim DV - 0-10V	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	◆ ____ ▲ ____ (28 colors)	○ ____ (6 colors) No shine ring: indicate with 00	40 - 40° 52 - 52°	┌ ____ (5 colors/ 2 lengths)		CCT	40°	52°
								2700K	694	684
								3000K	726	716
								3500K	753	742
								4000K	770	759

	HANGOVER PLUG Ø75 H:150	A380390-						qty			
	Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Shine Ring	Reflector	Cable	Delivered Lumen (lm)			
	DN - Non Dim DV - 0-10V	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	◆ ____ ▲ ____ (28 colors)	○ ____ (6 colors) No shine ring: indicate with 00	6 - 6° 22 - 22° 38 - 38°	┌ ____ (5 colors/ 2 lengths)		CCT	6°	22°	38°
								2700K	389	335	371
								3000K	412	355	393
								3500K	435	375	415
								4000K	447	385	426

	075 H:150 DIR/IND	A380391-						qty				
	Wattage: 9.6W	Dimming	CCT - Direct	CCT - Indirect	Finish	Shine Ring	Reflector	Cable	Delivered Lumen (lm)			
	DN - Non Dim DV - 0-10V	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	27K - 2700K 30K - 3000K 40K - 4000K	◆ ____ ▲ ____ (28 colors)	○ ____ (6 colors) No shine ring: indicate with 00	6 - 6° 22 - 22° 38 - 38°	┌ ____ (5 colors/ 2 lengths)		CCT	6°	22°	38°
								27K/27K	712	656	691	
								30K/30K	750	690	728	
								35K/30K	770	709	748	
								40K/40K	793	730	770	

HANGOVER PLUG MICRO-DOT

	MICRO-DOT Ø28 H:150	A380379-						qty		
	Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Reflector	Cable	Delivered Lumen (lm)			
	DN - Non Dim DV - 0-10V	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	◆ ____ ▲ ____ (28 colors)	32 - 32° 58 - 58°	┌ ____ (5 colors/ 2 lengths)		CCT	32°	58°	
							2700K	283	310	
							3000K	300	328	
							3500K	317	347	
							4000K	325	356	

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

INSERTS

HANGOVER PLUG MICRO-DOT

FINISHES OPTIONS:

See page 21 for color options and use 2 digit numbers to indicate your choices

MICRO-DOT Ø28 H:300	A380381-						qty		
Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Reflector	Cable	Delivered Lumen (lm)			
	DN - Non Dim	27K -2700K	◆ ___	32 - 32°	T ___ (5 colors/ 2 lengths)	CCT	32°	58°	
	DV - 0-10V	30K - 3000K	▲ ___	58 - 58°		2700K	283	310	
		35K - 3500K	(28 colors)			3000K	300	328	
		40K - 4000K				3500K	317	347	
						4000K	325	356	
MICRO-DOT Ø28 H:450	A380383-						qty		
Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Reflector	Cable	Delivered Lumen (lm)			
	DN - Non Dim	27K -2700K	◆ ___	32 - 32°	T ___ (5 colors/ 2 lengths)	CCT	32°	58°	
	DV - 0-10V	30K - 3000K	▲ ___	58 - 58°		2700K	283	310	
		35K - 3500K	(28 colors)			3000K	300	328	
		40K - 4000K				3500K	317	347	
						4000K	325	356	
MICRO-DOT Ø40 H:150	A380385-						qty		
Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Reflector	Cable	Delivered Lumen (lm)			
	DN - Non Dim	27K -2700K	◆ ___	32 - 32°	T ___ (5 colors/ 2 lengths)	CCT	32°	58°	
	DV - 0-10V	30K - 3000K	▲ ___	58 - 58°		2700K	283	310	
		35K - 3500K	(28 colors)			3000K	300	328	
		40K - 4000K				3500K	317	347	
						4000K	325	356	
MICRO-DOT Ø40 H:300	A380387-						qty		
Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Reflector	Cable	Delivered Lumen (lm)			
	DN - Non Dim	27K -2700K	◆ ___	32 - 32°	T ___ (5 colors/ 2 lengths)	CCT	32°	58°	
	DV - 0-10V	30K - 3000K	▲ ___	58 - 58°		2700K	283	310	
		35K - 3500K	(28 colors)			3000K	300	328	
		40K - 4000K				3500K	317	347	
						4000K	325	356	
MICRO-DOT Ø40 H:450	A380389-						qty		
Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Reflector	Cable	Delivered Lumen (lm)			
	DN - Non Dim	27K -2700K	◆ ___	32 - 32°	T ___ (5 colors/ 2 lengths)	CCT	32°	58°	
	DV - 0-10V	30K - 3000K	▲ ___	58 - 58°		2700K	283	310	
		35K - 3500K	(28 colors)			3000K	300	328	
		40K - 4000K				3500K	317	347	
						4000K	325	356	

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

HYPLINE

INSERTS

HYPLINE 705	A380260-	qty						
Wattage: 16.3W	Dimming	CCT - 90 CRI	Diffuser	Delivered Lumen (lm)				
	DN - Non Dim	27K - 2700K	MP - Microprism OP - Opal U - U-Diffusor	 	Diffuser	MP	OP	U
	DV - 0-10V	30K - 3000K			2700K	1405	1511	1797
		35K - 3500K			3000K	1439	1548	1841
		40K - 4000K			3500K	1494	1607	1911
					4000K	1524	1640	1950

HYPLINE 1128	A380268-	qty						
Wattage: 26W	Dimming	CCT - 90 CRI	Diffuser	Delivered Lumen (lm)				
	DN - Non Dim	27K - 2700K	MP - Microprism OP - Opal U - U-Diffusor	 	Diffuser	MP	OP	U
	DV - 0-10V	30K - 3000K			2700K	2247	2418	2876
		35K - 3500K			3000K	2302	2477	2946
		40K - 4000K			3500K	2390	2572	3059
					4000K	2439	2624	3121

HYPLINE 1408	A380276-	qty						
Wattage: 32.6W	Dimming	CCT - 90 CRI	Diffuser	Delivered Lumen (lm)				
	DN - Non Dim	27K - 2700K	MP - Microprism OP - Opal U - U-Diffusor	 	Diffuser	MP	OP	U
	DV - 0-10V	30K - 3000K			2700K	2809	3023	3595
		35K - 3500K			3000K	2877	3096	3682
		40K - 4000K			3500K	2987	3214	3823
					4000K	3048	3280	3901

MAGIQ

FINISHES OPTIONS:

See page 21 for color options and use 2 digit numbers to indicate your choices

MAGIQ 4	A380487-	qty						
Wattage: 13.3W	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)			
	DN - Non Dim	27K - 2700K	<input type="checkbox"/> ____ (2 colors)	8 - 8° 14 - 14° 34 - 34°	CCT	8°	14°	34°
	DP - Phase Dim	30K - 3000K			2700K	659	612	781
	DV - 0-10V	35K - 3500K			3000K	712	661	843
		40K - 4000K			3500K	727	675	860
					4000K	742	689	878

MAGIQ 4 KORONA	A380491-	qty						
Wattage: 13.3W	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)			
	DN - Non Dim	27K - 2700K	<input checked="" type="checkbox"/> ____ (28 colors)	8 - 8° 14 - 14° 34 - 34°	CCT	8°	14°	34°
	DP - Phase Dim	30K - 3000K			2700K	659	612	781
	DV - 0-10V	35K - 3500K			3000K	712	661	843
		40K - 4000K			3500K	727	675	860
					4000K	742	689	878

HYPRO 40 SURFACE SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS

MAGIQ

FINISHES OPTIONS:

See page 21 for color options and use 2 digit numbers to indicate your choices

MAGIQ 4 + 4	A38909-					qty			
Wattage: 26.6W	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)				
	DN - Non Dim	27K -2700K	□ ____	8 - 8°	CCT	8°	14°	34°	
	DP - Phase Dim	30K - 3000K	(2 colors)	14 - 14°	2700K	1318	1225	1561	
	DV - 0-10V	35K - 3500K		34 - 34°	3000K	1423	1322	1685	
		40K - 4000K			3500K	1453	1350	1721	
					4000K	1483	1378	1756	
MAGIQ 4 + 4 KORONA	A380500-					qty			
Wattage: 26.6W	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)				
	DN - Non Dim	27K -2700K	◆ ____	8 - 8°	CCT	8°	14°	34°	
	DP - Phase Dim	30K - 3000K	(28 colors)	14 - 14°	2700K	1318	1225	1561	
	DV - 0-10V	35K - 3500K	□ ____	34 - 34°	3000K	1423	1322	1685	
		40K - 4000K	(2 colors)		3500K	1453	1350	1721	
					4000K	1483	1378	1756	
MAGIQ 8	A380507-					qty			
Wattage: 26.6W	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)				
	DN - Non Dim	27K -2700K	□ ____	8 - 8°	CCT	8°	14°	34°	
	DP - Phase Dim	30K - 3000K	(2 colors)	14 - 14°	2700K	1318	1225	1561	
	DV - 0-10V	35K - 3500K		34 - 34°	3000K	1423	1322	1685	
		40K - 4000K			3500K	1453	1350	1721	
					4000K	1483	1378	1756	
MAGIQ 8 KORONA	A380510-					qty			
Wattage: 26.6W	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)				
	DN - Non Dim	27K -2700K	◆ ____	8 - 8°	CCT	8°	14°	34°	
	DP - Phase Dim	30K - 3000K	(28 colors)	14 - 14°	2700K	1318	1225	1561	
	DV - 0-10V	35K - 3500K	□ ____	34 - 34°	3000K	1423	1322	1685	
		40K - 4000K	(2 colors)		3500K	1453	1350	1721	
					4000K	1483	1378	1756	
MAGIQ 8 + 8	A380516-					qty			
Wattage: 53.2W	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)				
	DN - Non Dim	27K -2700K	□ ____	8 - 8°	CCT	8°	14°	34°	
	DP - Phase Dim	30K - 3000K	(2 colors)	14 - 14°	2700K	2636	2450	3122	
	DV - 0-10V	35K - 3500K		34 - 34°	3000K	2846	2645	3371	
		40K - 4000K			3500K	2907	2701	3443	
					4000K	2966	2756	3513	

HYPRO 40 SURFACE SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS

MAGIQ

FINISHES OPTIONS:

See page 21 for color options and use 2 digit numbers to indicate your choices

MAGIQ 8 + 8 KORONA	A380518-			qty				
Wattage: 53.2W	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)			
	DN - Non Dim	27K -2700K	◆ ____	8 - 8°	CCT	8°	14°	34°
	DP - Phase Dim	30K - 3000K	(28 colors)		2700K	2636	2450	3122
	DV - 0-10V	35K - 3500K	□ ____	14 - 14°	3000K	2846	2645	3371
		40K - 4000K	(2 colors)		3500K	2907	2701	3443
					4000K	2966	2756	3513

MAGIQ MICRO-DOT

MAGIQ 4 MICRO-DOT	A380493-			qty		
Wattage: 13.3W	Dimming	CCT - 90 CRI	Reflector	Delivered Lumen (lm)		
	DN - Non Dim	27K -2700K	22 - 22°	CCT	22°	38°
	DP - Phase Dim	30K - 3000K	38 - 38°	2700K	640	588
	DV - 0-10V	35K - 3500K		3000K	691	635
		40K - 4000K		3500K	706	648
				4000K	720	661

MAGIQ 4 + 4 MICRO-DOT	A380503-			qty		
Wattage: 26.6W	Dimming	CCT - 90 CRI	Reflector	Delivered Lumen (lm)		
	DN - Non Dim	27K -2700K	22 - 22°	CCT	22°	38°
	DP - Phase Dim	30K - 3000K	38 - 38°	2700K	1280	1176
	DV - 0-10V	35K - 3500K		3000K	1382	1269
		40K - 4000K		3500K	1411	1297
				4000K	1440	1323

MAGIQ 8 MICRO-DOT	A380512-			qty		
Wattage: 26.6W	Dimming	CCT - 90 CRI	Reflector	Delivered Lumen (lm)		
	DN - Non Dim	27K -2700K	22 - 22°	CCT	22°	38°
	DP - Phase Dim	30K - 3000K	38 - 38°	2700K	1280	1176
	DV - 0-10V	35K - 3500K		3000K	1382	1269
		40K - 4000K		3500K	1411	1297
				4000K	1440	1323

MAGIQ 8 + 8 MICRO-DOT	A380522-			qty		
Wattage: 53.2W	Dimming	CCT - 90 CRI	Reflector	Delivered Lumen (lm)		
	DN - Non Dim	27K -2700K	22 - 22°	CCT	22°	38°
	DP - Phase Dim	30K - 3000K	38 - 38°	2700K	2560	2351
	DV - 0-10V	35K - 3500K		3000K	2763	2538
		40K - 4000K		3500K	2822	2592
				4000K	2880	2645

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS

MAGIQ WALLWASH

FINISHES OPTIONS:

See page 21 for color options and use 2 digit numbers to indicate your choices

MAGIQ HOLLOW WALLWASH	A380526-			qty	
Wattage: 18.7W	Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
	DN - Non Dim	27K -2700K	<input type="checkbox"/> ____ (2 colors)	2700K	1270
	DP - Phase Dim	30K - 3000K		3000K	1270
	DV - 0-10V	35K - 3500K		3500K	1513
		40K - 4000K		4000K	1544

HOLLOW WALLWASH KORONA	A380529-			qty	
Wattage: 18.7W	Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
	DN - Non Dim	27K -2700K	◆ ____ (28 colors)	2700K	1270
	DP - Phase Dim	30K - 3000K		3000K	1270
	DV - 0-10V	35K - 3500K		3500K	1513
		40K - 4000K		4000K	1544

MAGIQ WALLWASH	A38917-			qty	
Wattage: 31.3W	Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
	DN - Non Dim	27K -2700K	<input type="checkbox"/> ____ (2 colors)	2700K	2125
	DP - Phase Dim	30K - 3000K		3000K	2260
	DV - 0-10V	35K - 3500K		3500K	2429
		40K - 4000K		4000K	2564

OIKO PRO IN

OIKO PRO IN 34°	A380291-			qty	
Wattage: 19.3W	Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
	DN - Non Dim	27K -2700K	◆ ____ ▲ ____ (28 colors)	CCT	34°
	DV - 0-10V	30K - 3000K		2700K	1510
		35K - 3500K		3000K	1517
		40K - 4000K		3500K	1588
			4000K	1603	

OIKO PRO IN 36° TW	A380292-			qty	
Wattage: 14.4W	Finish			Delivered Lumen (lm)	
	◆ ____			TUNABLE WHITE	
	▲ ____			2700K - 6500K (MAX)	
	(28 colors)			36°	1081






PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS

OIKO PRO IN

FINISHES OPTIONS:

See page 21 for color options and use 2 digit numbers to indicate your choices

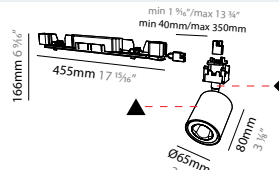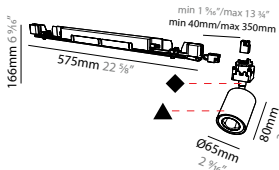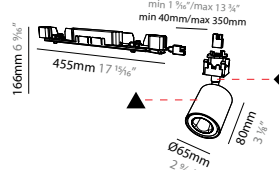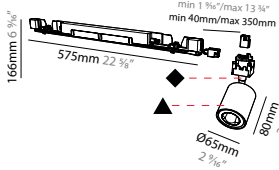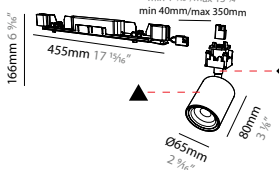OIKO PRO IN 50°		A380293-			qty	
Wattage: 19.3W		Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
	DN - Non Dim DV - 0-10V	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	◆ ____ ▲ ____ (28 colors)	CCT	50°	
				2700K	1656	
				3000K	1665	
				3500K	1743	
				4000K	1759	
OIKO PRO IN 50° TW		A380294-			qty	
Wattage: 14.4W		Finish			Delivered Lumen (lm)	
	◆ ____ ▲ ____ (28 colors)	TUNABLE WHITE 2700K - 6500K (MAX)		50°	1186	
OIKO PRO IN 60°		A380295-			qty	
Wattage: 19.3W		Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
	DN - Non Dim DV - 0-10V	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	◆ ____ ▲ ____ (28 colors)	CCT	60°	
				2700K	1820	
				3000K	1829	
				3500K	1914	
				4000K	1932	
OIKO PRO IN 60° TW		A380296-			qty	
Wattage: 14.4W		Finish			Delivered Lumen (lm)	
	◆ ____ ▲ ____ (28 colors)	TUNABLE WHITE 2700K - 6500K (MAX)		62°	1381	
OIKO PRO IN SUPERSPOT		A380299-			qty	
Wattage: 21.1W		Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
	DN - Non Dim DV - 0-10V	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	◆ ____ ▲ ____ (28 colors)	CCT	14°	
				2700K	1278	
				3000K	1377	
				3500K	1432	
				4000K	1461	


PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____


OIKO PRO IN WALLWASH

FINISHES OPTIONS:


See page 21 for color options and use 2 digit numbers to indicate your choices


INSERTS

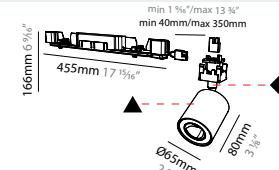
	OIKO PRO IN WALLWASH	A380297-	qty			
	Wattage: 19.3W	Dimming	CCT - 90 CRI	Finish		Delivered Lumen (lm)
	DN - Non Dim	27K -2700K	◆	—		2700K 1624
	DV - 0-10V	30K - 3000K	▲	—		3000K 1632
		35K - 3500K	(28 colors)		3500K 1708	
	40K - 4000K			4000K 1724		

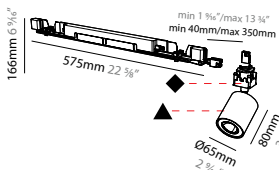	OIKO PRO IN WALLWASH TW	A380298-	qty		
	Wattage: 14.4W	Finish			Delivered Lumen (lm)
	◆	—		TUNABLE WHITE	
	▲	—		2700K - 6500K (MAX)	
	(28 colors)			1162	

RICO

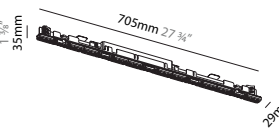	RICO 705	A380434-	qty			
	Wattage: 16.3W	Dimming	CCT - 90 CRI	Reflector		Delivered Lumen (lm)
	DN - Non Dim	27K -2700K	46 - 46°			
	DV - 0-10V	30K - 3000K	62 - 62°			
		35K - 3500K			2700K 1934 1695	
	40K - 4000K			3000K 1981 1737		
				3500K 2057 1803		
				4000K 2099 1840		

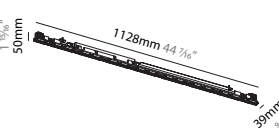	RICO 1128	A380442-	qty			
	Wattage: 26W	Dimming	CCT - 90 CRI	Reflector		Delivered Lumen (lm)
	DN - Non Dim	27K -2700K	46 - 46°			
	DV - 0-10V	30K - 3000K	62 - 62°			
		35K - 3500K			2700K 3095 2713	
	40K - 4000K			3000K 3170 2779		
				3500K 3291 2885		
				4000K 3358 2944		

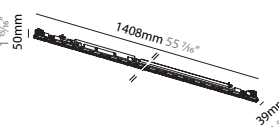	RICO 1408	A380450-	qty			
	Wattage: 32.6W	Dimming	CCT - 90 CRI	Reflector		Delivered Lumen (lm)
	DN - Non Dim	27K -2700K	46 - 46°			
	DV - 0-10V	30K - 3000K	62 - 62°			
		35K - 3500K			2700K 3868 3391	
	40K - 4000K			3000K 3962 3473		
				3500K 4113 3605		
				4000K 4197 3679		

HYPRO 40 SURFACE SYSTEM SPECIFICATION SHEET

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

SIGN DIVA TUBE

FINISHES OPTIONS:

See page 21 for color options and use 2 digit numbers to indicate your choices

INSERTS

SIGN DIVA Ø400	A380535-					qty				
	Wattage: 17.2W	Dimming	CCT - 90 CRI	Finish	Shine Ring	Diffuser	Delivered Lumen (lm)			
	DN - Non Dim	27K -2700K	◆ ___	○ ___	(4 options) Use 2 digit numbers below 	Diffuser	01	02	03	04
	DV - 0-10V	30K - 3000K	▲ ___	(6 colors)		2700K	1807	1611	1868	1656
		35K - 3500K	(28 colors)	No shine ring: indicate with 00		3000K	1943	1733	2009	1781
		40K - 4000K				3500K	1959	1747	2025	1796
					4000K	1991	1776	2058	1825	

SIGN DIVA Ø400 KORONA	A380539-					qty				
	Wattage: 17.2W	Dimming	CCT - 90 CRI	Finish	Diffuser	Delivered Lumen (lm)				
	DN - Non Dim	27K -2700K	◆ ___	(4 options) Use 2 digit numbers below 	Diffuser	01	02	03	04	
	DV - 0-10V	30K - 3000K	▲ ___		2700K	1807	1611	1868	1656	
		35K - 3500K	(28 colors)		3000K	1943	1733	2009	1781	
		40K - 4000K			3500K	1959	1747	2025	1796	
				4000K	1991	1776	2058	1825		

SIGN DIVA Ø570	A380543-					qty				
	Wattage: 48.6W	Dimming	CCT - 90 CRI	Finish	Shine Ring	Diffuser	Delivered Lumen (lm)			
	DN - Non Dim	27K -2700K	◆ ___	○ ___	(4 options) Use 2 digit numbers below 	Diffuser	01	02	03	04
	DV - 0-10V	30K - 3000K	▲ ___	(6 colors)		2700K	4978	4439	5145	4563
		35K - 3500K	(28 colors)	No shine ring: indicate with 00		3000K	5337	4759	5516	4892
		40K - 4000K				3500K	5382	4799	5563	4933
					4000K	5494	4899	5679	5035	

SIGN DIVA Ø570 KORONA	A380547-					qty				
	Wattage: 17.2W	Dimming	CCT - 90 CRI	Finish	Diffuser	Delivered Lumen (lm)				
	DN - Non Dim	27K -2700K	◆ ___	(4 options) Use 2 digit numbers below 	Diffuser	01	02	03	04	
	DV - 0-10V	30K - 3000K	▲ ___		2700K	4978	4439	5145	4563	
		35K - 3500K	(28 colors)		3000K	5337	4759	5516	4892	
		40K - 4000K			3500K	5382	4799	5563	4933	
				4000K	5494	4899	5679	5035		

SNOOKER

SNOOKER	A380421-					qty				
	Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Shine Ring	Reflector	Cable	Delivered Lumen (lm)		
	DN - Non Dim	27K -2700K	◆ ___	○ ___	(6 colors) No shine ring: indicate with 00	32 - 32° 58 - 58°	T ___ (5 colors/ 2 lengths)	CCT	32°	58°
	DV - 0-10V	30K - 3000K	(28 colors)	2700K				283	310	
		35K - 3500K		3000K				300	328	
		40K - 4000K		3500K				317	347	
				4000K	325	356				

HYPRO 40 SURFACE SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

SNOOKER

FINISHES OPTIONS:

See page 21 for color options and use 2 digit numbers to indicate your choices

INSERTS

SNOOKER METAL	A380251-						qty		
Wattage: 6.4W	Dimming	CCT - 90 CRI	Shine Ring	Reflector	Cable	Delivered Lumen (lm)			
	DN - Non Dim	27K - 2700K	 (6 colors) No shine ring: indicate with 00	32 - 32° 58 - 58°	 (5 colors/ 2 lengths)	CCT	32°	58°	
	DV - 0-10V	30K - 3000K				2700K	283	310	
	35K - 3500K	40K - 4000K				3000K	300	328	
						3500K	317	347	
						4000K	325	356	

COMPONENTS



COVER BLACK	A38892-3000		qty
	Length		
	A38892 - 1000mm		Lengths are pre cut at the factory.
	A38893 - 2000mm		
	A38894 - 3000mm		

KORONA PROFILE	A38895-		qty
	Finish		
	_____		Colored decorative cover profile, max length of a single run is 3000mm 118 1/8\"/>
	(28 colors)		

HYPRO 40 SURFACE SYSTEM SPECIFICATION SHEET

RECOMMENDED WALLWASH DISTANCES

Simplified diagrams - it does not reflect the specific photometry of the inserts.
 Setback and on center spacing depends on the color and texture of your walls.
 The calculations below were completed with a white wall.

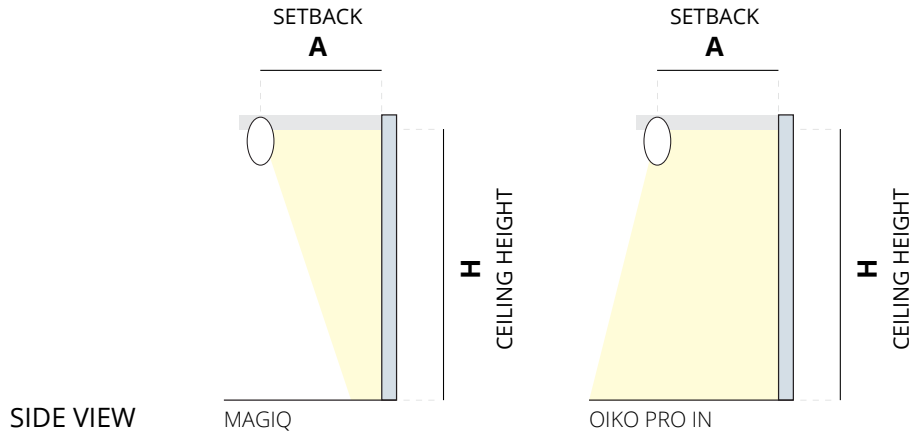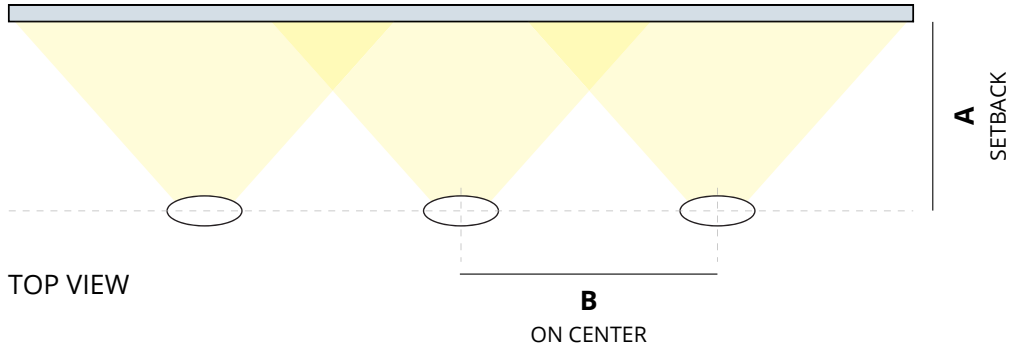

MAGIQ HOLLOW WALLWASH			MAGIQ WALLWASH			OIKO PRO IN WALLWASH		
H	A	B	H	A	B	H	A	B
7' 6.5"	17.5" - 29"	25" - 43"	9' 10"	32" - 35"	40" - 48"	7' 6.5"	18" - 30"	27.5" - 45"
8' 2.5"	19" - 32"	28" - 47"	11' 6"	35" - 40"	48" - 56"	8' 2.5"	19.5" - 33.5"	29.5" - 49"
8' 10"	21" - 34"	31" - 51"	13'	40" - 48"	56" - 63"	8' 10"	21.5" - 35.5"	31.5" - 53"
9' 10"	22.5" - 37.5"	34" - 55"	14' 9"	48" - 56"	63" - 71"	9' 10"	23.5" - 39"	35.5" - 59"

HYPRO 40 SURFACE SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

SYSTEM SUMMARY

System

Type

Surface
Rated for Dry Locations Ceiling and Wall Mounted

Approval Status

Certified to North American Standards

Emission

Refer to emission icon beside each light insert and symbol legend for descriptions

Efficiency

Acrylic opal diffuser (snap-in) lens 43%
Micro-prismatic diffuser (snap-in) lens 53%
Rico-cover diffuser (snap-in) lens

Profile

Measurement

w 38mm (1 1/2") x ht. 76mm (3")

Housing

Anodized extruded aluminum profile available per meter and field-cuttable
Profiles have a maximum length of 3000mm (9' 10 15/16") and joined together with couplers to ensure uniform appearance and easy installation

Electrical

Connections

Luminaries are pre-wired with a factory installed branch circuit wiring and quick-release connectors
Through wiring is used to connect the luminaries

Power Feed

Located 2 inches from one end of the fixture, on top of the profile
If a different location is required, please specify
3 Wires - non-dimming or phase dimming
4 Wires - two circuits of non-dimming or phase dimming
5 Wires - 0-10V dimming or dali dimming

LED Driver

Integrated with inserts
Electronic Class 2 driver, Universal 120V/277V
Non Dimming Driver, Dimming Driver 0-10V (10-100%)
Consult factory for driver cutsheet
If a different driver is required, please specify

Emergency Inverter Compatible

To be installed remotely, and provided by others
It can be located up to 250m away from the fixture

Emergency circuit wiring is available upon request (Isolated track with dedicated driver used for emergency circuit will connect to emergency battery pack - supplied by others)

General

Features

Korona Cone is a glare-reduction cone that sits in front of the reflector - available in 29 standard colors, thus creating a special decorative effect

LFO lenses ensure a glare free downlight without illuminating the luminaries housing and the lowest UGR ratings perfect for residential and hospitality applications

Rico lines use special micro reflectors that improve efficiency and achieve extremely low UGR values (some cases less than 0)

Hadi fixtures with indirect lighting have clearly defined openings in the back to create a subtle glow

Custom Requests and Additional Options

Availability depends by insert, system, and configuration
Must consult factory and allow up to 5 business days for an answer

Special beam angles, special LEDs, CRI 90, RGB-W, tunable, light inserts with different outputs, light inserts on different circuits

Special LEDs optimize luminaries to meet different applications

Gold+ invokes a heavy golden tone intended for bread and pastries


Meat+ displays saturated red light (white parts of product will appear slightly red)

Art+ highlights pieces of art without adversely affecting the perception of individual colors

Fashion+ has the entire color spectrum brilliantly orchestrated without distorting the color temperature

Configuration

Consult factory for patterns or custom designs
Provide configuration drawings

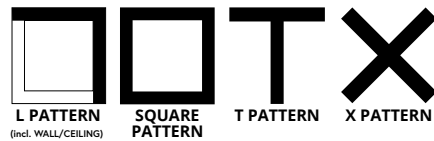

*Shop drawings provided upon receiving purchase order

Warranty

ZANEEN provides a limited warranty from date of purchase to original purchaser

LED Inserts: 5 year tested for 50,000 hours at 70% lumen output (L70)

LED Driver: 5 year

Non-Electrical Components: 1 year


*Check boxes to complete specification order and submit to quotes@zaneen.com to receive a formal BOM and a finalized model number

*In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

HYPRO 40 SURFACE SYSTEM SPECIFICATION SHEET

PROJECT _____
 TYPE _____
 NOTES _____
 QUANTITY _____
 DATE _____

FINISH COLORS




Sparkling Silver - 01



Black Velvet - 02



Crystal White - 03



Creamy - 04



Hampton Bay - 05



Urban Forest - 07



In the Army - 08



Rusty Angel - 09



Fade to Grey - 12



Mysterious Grey - 13



Lost Dream - 15




Purple Sky - 16




Fresh Oh - 17



Funky P - 18



Kissing Aphrodite - 19




Poseidon's Paradise - 20




Blue Sky - 21



Spring Green - 22



Mellow Yellow - 23



Golden Heart - 24



Gun Metal - 25



Champagne Cream - 26



Copper Mine - 27



Ancient Bronze - 28



Jazz Gold - 29



Olive Breeze - 30



Moonlight Silver - 31



Rosewood Red - 32




FRAME



Black - 02



White - 03



SHINE RING



Opal - 01



Yellow - 02



Orange - 03



Red - 04



Blue - 05



Green - 06



CABLE (COLORS/LENGTH)



Black/2m 01



Black/4m 02



White/2m 03



White/4m 04



Orange/2m 05



Orange/4m 06



Red/2m 07



Red/4m 08



Green/2m 09



Green/4m 10



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.

Gun Metal: No Gun Metal finish is alike. It combines a mixture of transparent and black color particles which ensures a highly individual effect and no luminaire being identical.

Champagne Cream, Copper Mine, Ancient Bronze + Jazz Gold: These finishes have slight fading from specific powder coating production. Each luminaire will slightly vary.

RAL Color Upon Request



LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

WIRING DIAGRAMS


ALL ZANEEN FIXTURES ARE MANUFACTURED TO NORTH AMERICAN ELECTRICAL STANDARDS

Post Sales Support
HQ 1-800-388-3382 X 625 support@zaneen.com


IMPORTANT

- Do NOT connect directly to line voltage
- There is a minimum and maximum load per driver (See fixture and driver specifications).
- Fixture MUST be connected to LED driver, prior to turning power on

PHASE/NON-DIMMING WIRING DIAGRAM

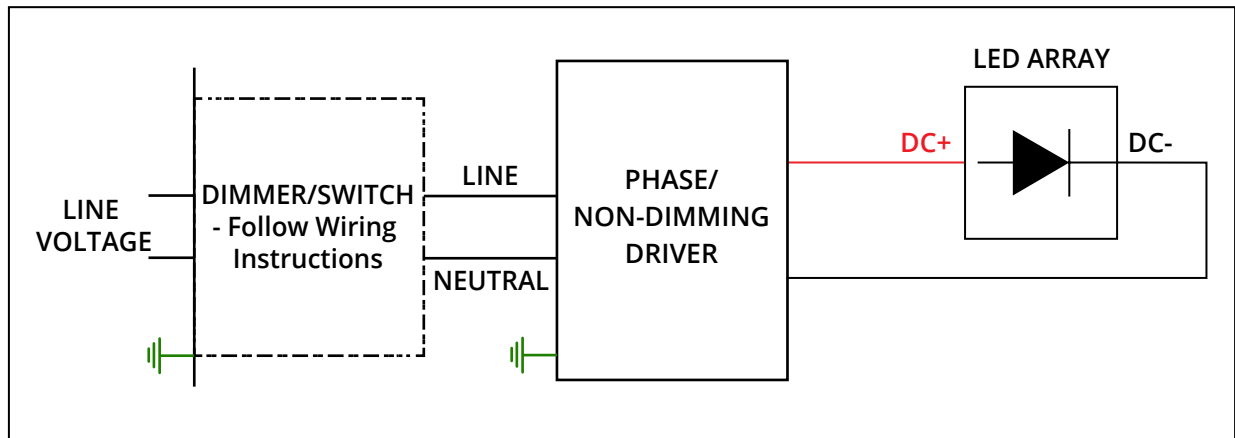

0-10V DIMMING WIRING DIAGRAM

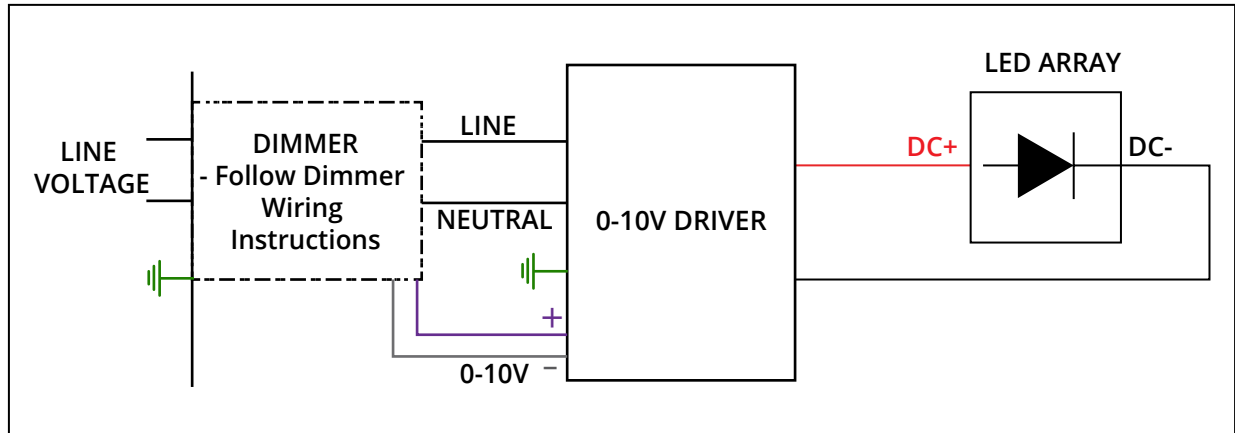

HYPRO 40 SURFACE SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

Insert custom drawing here or attach with additional pages

