

## **HYPRO 40** SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____




### ARCHITECTURAL | HYPRO 40

HYPRO 40 creates unique new levels of lighting structure: The individually configurable suspended profile can create floating lines of line thanks to a variety of connectors and nodes. Both general and accent lighting can be integrated into the profile at the same time. With this freedom, the lighting can adapt perfectly to the interior design and structure of the room.

The system is equipped with the innovative Rico reflectors, achieving the highest efficiency with a unique glare-free. With additional inserts such as the MAGIQ family, homogeneous illumination is guaranteed. For the most comfortable lighting scenario and greater flexibility, tunable white is available within the system spotlights CENTRIQ IN and OIKO PRO IN.



### SYSTEM PROFILE

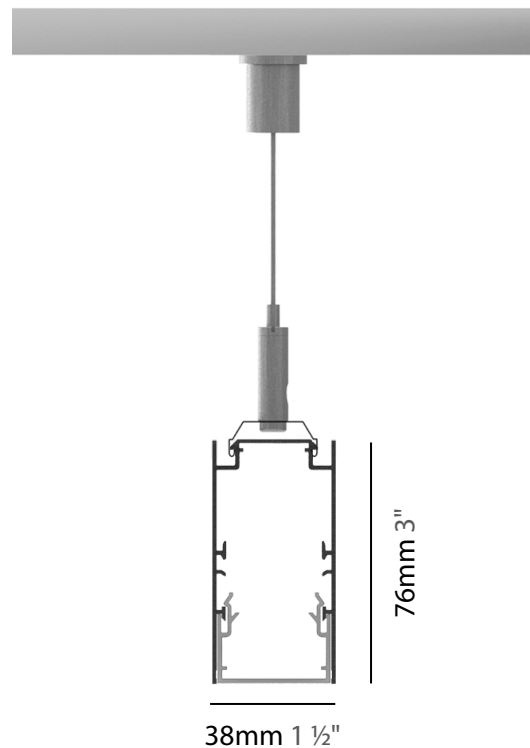

## HYPRO 40 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT \_\_\_\_\_  
 TYPE \_\_\_\_\_  
 NOTES \_\_\_\_\_  
 QUANTITY \_\_\_\_\_  
 DATE \_\_\_\_\_

### SYSTEM GUIDE

To make your product selection and complete system specification, proceed with the following:  
 review system options, create your system code in the field below and include your quantity.  
 For the inserts and components, use the field beside each product name.  
 Submit to quotes@zaneen.com to receive a formal BOM and finalized model numbers.

UPON REQUEST  
 Additional Options \_\_\_\_\_  
 \_\_\_\_\_ Color Temperature  
 \_\_\_\_\_ RGB-W / Tunable  
 \_\_\_\_\_ Lumen Outputs  
 \_\_\_\_\_ Beam Angle  
 \_\_\_\_\_ Special LED  
 \_\_\_\_\_ CRI



EXAMPLE A3HY40-SUS-SYS-UNV-DN-10"-S-01-01-01-01-2M

### SYSTEM BUILD CODE: A3HY40-SUS-SYS- qty

<b>ELECTRICAL</b>	Voltage	Dimming	Circuit
	<b>UNV</b> - 120/277V	<b>DN</b> - Non Dim	<b>EMCIR</b> - Emergency Circuit
	<b>120</b> - 120V	<b>DP</b> - Phase Dim (Triac/ELV)	
	<b>347</b> - 347V	<b>DV</b> - 0-10V (100-1%)	
	<b>DD</b> - DALI (100-1%)		

<b>LAYOUT</b>	Fixture Head Spacing* (approx.)	Run Shapes	System Finish	Cable Length
	<b>20"</b> - on center <b>30"</b> - on center <b>40"</b> - on center <b>CUS (XX)</b> - Custom	<b>S</b> _____ ' Straight <b>L</b> _____ 'x_____ ' Ceiling to Ceiling <b>LV</b> _____ 'x_____ ' Ceiling to Wall <b>U</b> _____ 'x_____ 'x_____ ' <b>R</b> _____ 'x_____ ' Rectangle <b>T</b> _____ 'x_____ ' <b>X</b> _____ 'x_____ '	Profile ◆ _____ End Cap ◆ _____ Installation Clip ◆ _____ Power Feed ◆ _____ 	<b>2M</b> - 2000mm <b>6M</b> - 6000mm
	*Dependent on fixture specified and length of integral driver		◆ (28 colors)	

<b>INSERTS</b>	<b>CENTRIQ</b>	INSERT BUILD CODE EXAMPLE: A38897-DN-27K-01-01-01-24			FINISHES OPTIONS: See page 21 for color options and use 2 digit numbers to indicate your choices			
	<b>CENTRIQ Ø30</b>	<b>A38897-</b>	qty			Delivered Lumen (lm)		
	Wattage: 4.4W	Dimming	CCT - 90 CRI	Finish	Reflector			
		<b>DN</b> - Non Dim <b>DV</b> - 0-10V	<b>27K</b> - 2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	◆ _____ ▲ _____ ● _____ (28 colors)	<b>24</b> - 24° <b>32</b> - 32°	CCT	24°	32°
<b>CENTRIQ Ø40 SUPERSPOT</b>	<b>A38898-</b>	qty			Delivered Lumen (lm)			
Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish					
	<b>DN</b> - Non Dim <b>DV</b> - 0-10V	<b>27K</b> - 2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	◆ _____ ▲ _____ ● _____ (28 colors)					

## HYPRO 40 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS

### CENTRIQ

**FINISHES OPTIONS:**

See page 21 for color options and use 2 digit numbers to indicate your choices

	<b>CENTRIQ Ø40</b>	<b>A38899-</b>				qty
	Wattage: 6.5W	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	◆ ___	<b>22</b> - 22°	CCT	22° 30° 34° 38° 48°
	<b>DV</b> - 0-10V	<b>30K</b> - 3000K	▲ ___	<b>30</b> - 30°	2700K	519 501 379 480 472
		<b>35K</b> - 3500K	● ___	<b>34</b> - 34°	3000K	544 524 397 502 494
		<b>40K</b> - 4000K	(28 colors)	<b>38</b> - 38°	3500K	545 525 398 503 495
				<b>48</b> - 48°	4000K	575 555 420 531 523

	<b>CENTRIQ Ø55 SUPERSPOT</b>	<b>A38900-</b>				qty
	Wattage: 9.1W	Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	◆ ___	CCT		8°
	<b>DV</b> - 0-10V	<b>30K</b> - 3000K	▲ ___	2700K	474	
		<b>35K</b> - 3500K	● ___	3000K	502	
		<b>40K</b> - 4000K	(28 colors)	3500K	530	
				4000K	553	

	<b>CENTRIQ Ø55</b>	<b>A380465-</b>				qty
	Wattage: 12W	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	◆ ___	<b>18</b> - 18°	CCT	18° 26° 34° 36° 52°
	<b>DV</b> - 0-10V	<b>30K</b> - 3000K	▲ ___	<b>26</b> - 26°	2700K	772 663 795 828 843
		<b>35K</b> - 3500K	● ___	<b>34</b> - 34°	3000K	808 694 832 867 882
		<b>40K</b> - 4000K	(28 colors)	<b>36</b> - 36°	3500K	838 719 863 899 915
				<b>52</b> - 52°	4000K	857 735 882 919 935

	<b>CENTRIQ DOUBLE Ø30</b>	<b>A38902-</b>				qty
	Wattage: 8.8W	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	◆ ___	<b>24</b> - 24°	CCT	24° 32°
	<b>DV</b> - 0-10V	<b>30K</b> - 3000K	▲ ___	<b>32</b> - 32°	2700K	527 471
		<b>35K</b> - 3500K	● ___		3000K	558 499
		<b>40K</b> - 4000K	(28 colors)		3500K	589 527
					4000K	605 541

	<b>CENTRIQ DOUBLE Ø40 SUPERSPOT</b>	<b>A38903-</b>				qty
	Wattage: 12.8W	Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	◆ ___	CCT		12°
	<b>DV</b> - 0-10V	<b>30K</b> - 3000K	▲ ___	2700K	755	
		<b>35K</b> - 3500K	● ___	3000K	800	
		<b>40K</b> - 4000K	(28 colors)	3500K	844	
				4000K	867	



## HYPRO 40 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS

### CENTRIQ

**FINISHES OPTIONS:**

See page 21 for color options and use 2 digit numbers to indicate your choices

	<b>A380344-</b>					qty
	Wattage: 21.1W	Dimming	CCT - 90 CRI	Finish	Optics	Delivered Lumen (lm)
	<b>DN - Non Dim</b> <b>DV - 0-10V</b>	<b>27K - 2700K</b> <b>30K - 3000K</b> <b>35K - 3500K</b> <b>40K - 4000K</b>	◆ ____ ▲ ____ (28 colors)	<b>00 - No optic</b> <b>01 - Linear Spread</b> <b>02 - Spread</b> <b>03 - Honeycomb</b>	CCT    12° 2700K    1483 3000K    1465 3500K    1553 4000K    1554	

	<b>A380343-</b>					qty
	Wattage: 20.5W	Dimming	CCT - 90 CRI	Finish		Delivered Lumen (lm)
	<b>DN - Non Dim</b> <b>DV - 0-10V</b>	<b>27K - 2700K</b> <b>30K - 3000K</b> <b>35K - 3500K</b> <b>40K - 4000K</b>	◆ ____ ▲ ____ (28 colors)		CCT    14°- 44° 2700K    1205 - 1127 3000K    1298 - 1214 3500K    1376 - 1287 4000K    1377 - 1288	

	<b>A380346-</b>					qty
	Wattage: 36.2W	Dimming	CCT - 90 CRI	Finish	Reflector	Optics
	<b>DN - Non Dim</b> <b>DV - 0-10V</b>	<b>27K - 2700K</b> <b>30K - 3000K</b> <b>35K - 3500K</b> <b>40K - 4000K</b>	◆ ____ ▲ ____ (28 colors)	<b>20 - 20°</b> <b>32 - 32°</b> <b>54 - 54°</b>	<b>00 - No optic</b> <b>01 - Linear Spread</b> <b>02 - Spread</b> <b>03 - Honeycomb</b>	CCT    20°    32°    54° 2700K    2923    3030    2916 3000K    3044    3156    3037 3500K    3173    3290    3166 4000K    3328    3450    3320

	<b>A380347-</b>					qty
	Wattage: 34.9W	Finish		Reflector	Optics	Delivered Lumen (lm)
	◆ ____ ▲ ____ (28 colors)		<b>24 - 24°</b> <b>34 - 34°</b> <b>54 - 54°</b>	<b>00 - No optic</b> <b>01 - Linear Spread</b> <b>02 - Spread</b> <b>03 - Honeycomb</b>	TUNABLE WHITE 2700K - 6500K (MAX) 24°    2893 34°    2907 54°    2805	

	<b>A380350-</b>					qty
	Wattage: 25.7W	Dimming	CCT - 90 CRI	Finish	Optics	Delivered Lumen (lm)
	<b>DN - Non Dim</b> <b>DV - 0-10V</b>	<b>27K - 2700K</b> <b>30K - 3000K</b> <b>35K - 3500K</b> <b>40K - 4000K</b>	◆ ____ ▲ ____ (28 colors)	<b>00 - No optic</b> <b>01 - Linear Spread</b> <b>02 - Spread</b> <b>03 - Honeycomb</b>	CCT    12° 2700K    1609 3000K    1733 3500K    1838 4000K    1839	

## HYPRO 40 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

INSERTS

### CENTRIQ

#### FINISHES OPTIONS:

See page 21 for color options and use 2 digit numbers to indicate your choices

	<b>CENTRIQ IN Ø83 SUPERSPOT TW</b>	<b>A380351-</b>			qty	
	Wattage: 8.2W	Finish	Optics		Delivered Lumen (lm)	
	◆ ____ ▲ ____ (28 colors)			<b>TUNABLE WHITE</b> 2700K - 6500K (MAX)		
				10°	569	

	<b>CENTRIQ IN Ø83 FLEX</b>	<b>A380348-</b>			qty		
	Wattage: 20.5W	Dimming	CCT - 90 CRI	Finish		Delivered Lumen (lm)	
	DN - Non Dim DV - 0-10V	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	◆ ____ ▲ ____ (28 colors)		<b>CCT</b> <b>14° - 44°</b>		
				2700K	2923		

	<b>CENTRIQ IN Ø83 FLEX TW</b>	<b>A380349-</b>			qty	
	Wattage: 8.2W	Finish			Delivered Lumen (lm)	
	◆ ____ ▲ ____ (28 colors)			<b>TUNABLE WHITE</b> 2700K - 6500K (MAX)		
				14° - 46°	479 - 451	

### HADI

	<b>HADI-M SUSPENDED</b>	<b>A380552-</b>			qty		
	Wattage: 37.3W	Dimming	CCT - 90 CRI	Finish	Cable Length	Delivered Lumen (lm)	
	DN - Non Dim DP - Phase Dim DV - 0-10V	30K - 3000K 35K - 3500K 40K - 4000K	◆ ____ ▲ ____ (28 colors)		01 - 2000mm 02 - 6000mm	3000K	4269
						3500K	4311

	<b>HADI-M SUSPENDED DIR/IND</b>	<b>A380556-</b>			qty		
	Wattage: 77.8W	Dimming	CCT - 90 CRI	Finish	Cable Length	Delivered Lumen (lm)	
	DN - Non Dim DP - Phase Dim DV - 0-10V	30K - 3000K 35K - 3500K 40K - 4000K	◆ ____ ▲ ____ (28 colors)		01 - 2000mm 02 - 6000mm	3000K	5998
						3500K	6059

## HYPRO 40 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS

### HADI

#### FINISHES OPTIONS:

See page 21 for color options and use 2 digit numbers to indicate your choices

HADI-Q SUSPENDED		A380560-			qty	
Wattage: 37.3W		Dimming	CCT - 90 CRI	Finish	Cable Length	Delivered Lumen (lm)
	DN - Non Dim	30K - 3000K	◆ ____	<b>01 - 2000mm</b> <b>02 - 6000mm</b>	3000K	3911
	DP - Phase Dim	35K - 3500K	▲ ____		3500K	3949
	DV - 0-10V	40K - 4000K	(28 colors)		4000K	3987
HADI-Q SUSPENDED DIR/IND		A380564-			qty	
Wattage: 77.8W		Dimming	CCT - 90 CRI	Finish	Cable Length	Delivered Lumen (lm)
	DN - Non Dim	30K - 3000K	◆ ____	<b>01 - 2000mm</b> <b>02 - 6000mm</b>	3000K	5783
	DP - Phase Dim	35K - 3500K	▲ ____		3500K	5841
	DV - 0-10V	40K - 4000K	(28 colors)		4000K	5899
HADI-M INTEGRATED		A380568-			qty	
Wattage: 37.3W		Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
	DN - Non Dim	30K - 3000K	◆ ____	(28 colors)	3000K	4269
	DP - Phase Dim	35K - 3500K			3500K	4311
	DV - 0-10V	40K - 4000K			4000K	4352
HADI-M INTEGRATED DIR/IND		A380572-			qty	
Wattage: 77.8W		Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
	DN - Non Dim	30K - 3000K	◆ ____	(28 colors)	3000K	5998
	DP - Phase Dim	35K - 3500K			3500K	6059
	DV - 0-10V	40K - 4000K			4000K	6119
HADI-Q INTEGRATED		A380576-			qty	
Wattage: 37.3W		Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
	DN - Non Dim	30K - 3000K	◆ ____	(28 colors)	3000K	3911
	DP - Phase Dim	35K - 3500K			3500K	3949
	DV - 0-10V	40K - 4000K			4000K	3987

## HYPRO 40 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT
TYPE
NOTES
QUANTITY
DATE

INSERTS

### HADI

**FINISHES OPTIONS:**

See page 21 for color options and use 2 digit numbers to indicate your choices

HADI-Q INTEGRATED DIR/IND	A380580-	qty		
Wattage: 77.8W	Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)
	<b>DN</b> - Non Dim	<b>30K</b> - 3000K	◆ ___	3000K   5783
	<b>DP</b> - Phase Dim	<b>35K</b> - 3500K	(28 colors)	3500K   5841
	<b>DV</b> - 0-10V	<b>40K</b> - 4000K		4000K   5899

### HANGOVER PLUG

HANGOVER PLUG Ø28 H:150	A380392-	qty					
Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Shine Ring	Reflector	Cable	Delivered Lumen (lm)
	<b>DN</b> - Non Dim	<b>27K</b> - 2700K	◆ ___	○ ___	<b>20</b> - 20°	┌ ___	CCT   20°   26°   56°
	<b>DV</b> - 0-10V	<b>30K</b> - 3000K	▲ ___	(6 colors)	<b>26</b> - 26°	(5 colors/ 2 lengths)	2700K   403   397   381
		<b>35K</b> - 3500K	(28 colors)	No shine ring: indicate with <b>00</b>	<b>56</b> - 56°		3000K   427   420   404
		<b>40K</b> - 4000K					3500K   451   443   426
							4000K   463   455   438

HANGOVER PLUG Ø28 H:300	A380394-	qty					
Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Shine Ring	Reflector	Cable	Delivered Lumen (lm)
	<b>DN</b> - Non Dim	<b>27K</b> - 2700K	◆ ___	○ ___	<b>20</b> - 20°	┌ ___	CCT   20°   26°   56°
	<b>DV</b> - 0-10V	<b>30K</b> - 3000K	▲ ___	(6 colors)	<b>26</b> - 26°	(5 colors/ 2 lengths)	2700K   403   397   381
		<b>35K</b> - 3500K	(28 colors)	No shine ring: indicate with <b>00</b>	<b>56</b> - 56°		3000K   427   420   404
		<b>40K</b> - 4000K					3500K   451   443   426
							4000K   463   455   438

HANGOVER PLUG Ø28 H:450	A380396-	qty					
Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Shine Ring	Reflector	Cable	Delivered Lumen (lm)
	<b>DN</b> - Non Dim	<b>27K</b> - 2700K	◆ ___	○ ___	<b>20</b> - 20°	┌ ___	CCT   20°   26°   56°
	<b>DV</b> - 0-10V	<b>30K</b> - 3000K	▲ ___	(6 colors)	<b>26</b> - 26°	(5 colors/ 2 lengths)	2700K   403   397   381
		<b>35K</b> - 3500K	(28 colors)	No shine ring: indicate with <b>00</b>	<b>56</b> - 56°		3000K   427   420   404
		<b>40K</b> - 4000K					3500K   451   443   426
							4000K   463   455   438

HANGOVER PLUG Ø40 H:150	A380398-	qty					
Wattage: 9.8W	Dimming	CCT - 90 CRI	Finish	Shine Ring	Reflector	Cable	Delivered Lumen (lm)
	<b>DN</b> - Non Dim	<b>27K</b> - 2700K	◆ ___	○ ___	<b>40</b> - 40°	┌ ___	CCT   40°   52°
	<b>DV</b> - 0-10V	<b>30K</b> - 3000K	▲ ___	(6 colors)	<b>52</b> - 52°	(5 colors/ 2 lengths)	2700K   694   684
		<b>35K</b> - 3500K	(28 colors)	No shine ring: indicate with <b>00</b>			3000K   726   716
		<b>40K</b> - 4000K					3500K   753   742
							4000K   770   759



## HYPRO 40 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS

### HANGOVER PLUG

**FINISHES OPTIONS:**

See page 21 for color options and use 2 digit numbers to indicate your choices

HANGOVER PLUG Ø40 H:300	A380400-							qty														
		Wattage: 9.8W	Dimming	CCT - 90 CRI	Finish	Shine Ring	Reflector	Cable	Delivered Lumen (lm)													
			<b>DN</b> - Non Dim <b>DV</b> - 0-10V	<b>27K</b> -2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	◆ ____ ▲ ____ (28 colors)	○ ____ (6 colors) No shine ring: indicate with <b>00</b>	<b>40</b> - 40° <b>52</b> - 52°	T ____ (5 colors/ 2 lengths)	<table border="1"> <thead> <tr> <th>CCT</th> <th>40°</th> <th>52°</th> </tr> </thead> <tbody> <tr> <td>2700K</td> <td>694</td> <td>684</td> </tr> <tr> <td>3000K</td> <td>726</td> <td>716</td> </tr> <tr> <td>3500K</td> <td>753</td> <td>742</td> </tr> <tr> <td>4000K</td> <td>770</td> <td>759</td> </tr> </tbody> </table>	CCT	40°	52°	2700K	694	684	3000K	726	716	3500K	753	742	4000K
CCT	40°	52°																				
2700K	694	684																				
3000K	726	716																				
3500K	753	742																				
4000K	770	759																				

HANGOVER PLUG Ø40 H:450	A380402-							qty														
		Wattage: 9.8W	Dimming	CCT - 90 CRI	Finish	Shine Ring	Reflector	Cable	Delivered Lumen (lm)													
			<b>DN</b> - Non Dim <b>DV</b> - 0-10V	<b>27K</b> -2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	◆ ____ ▲ ____ (28 colors)	○ ____ (6 colors) No shine ring: indicate with <b>00</b>	<b>40</b> - 40° <b>52</b> - 52°	T ____ (5 colors/ 2 lengths)	<table border="1"> <thead> <tr> <th>CCT</th> <th>40°</th> <th>52°</th> </tr> </thead> <tbody> <tr> <td>2700K</td> <td>694</td> <td>684</td> </tr> <tr> <td>3000K</td> <td>726</td> <td>716</td> </tr> <tr> <td>3500K</td> <td>753</td> <td>742</td> </tr> <tr> <td>4000K</td> <td>770</td> <td>759</td> </tr> </tbody> </table>	CCT	40°	52°	2700K	694	684	3000K	726	716	3500K	753	742	4000K
CCT	40°	52°																				
2700K	694	684																				
3000K	726	716																				
3500K	753	742																				
4000K	770	759																				

HANGOVER PLUG Ø75 H:150	A380404-							qty																			
		Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Shine Ring	Reflector	Cable	Delivered Lumen (lm)																		
			<b>DN</b> - Non Dim <b>DV</b> - 0-10V	<b>27K</b> -2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	◆ ____ ▲ ____ (28 colors)	○ ____ (6 colors) No shine ring: indicate with <b>00</b>	<b>6</b> - 6° <b>22</b> - 22° <b>38</b> - 38°	T ____ (5 colors/ 2 lengths)	<table border="1"> <thead> <tr> <th>CCT</th> <th>6°</th> <th>22°</th> <th>38°</th> </tr> </thead> <tbody> <tr> <td>2700K</td> <td>389</td> <td>335</td> <td>371</td> </tr> <tr> <td>3000K</td> <td>412</td> <td>355</td> <td>393</td> </tr> <tr> <td>3500K</td> <td>435</td> <td>375</td> <td>415</td> </tr> <tr> <td>4000K</td> <td>447</td> <td>385</td> <td>426</td> </tr> </tbody> </table>	CCT	6°	22°	38°	2700K	389	335	371	3000K	412	355	393	3500K	435	375	415	4000K	447
CCT	6°	22°	38°																								
2700K	389	335	371																								
3000K	412	355	393																								
3500K	435	375	415																								
4000K	447	385	426																								

Ø75 H:150 DIR/IND	A380405-							qty																				
		Wattage: 9.6W	Dimming	CCT - Direct	CCT - Indirect	Finish	Shine Ring	Reflector	Cable	Delivered Lumen (lm)																		
			<b>DN</b> - Non Dim <b>DV</b> - 0-10V	<b>27K</b> -2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	<b>27K</b> -2700K <b>30K</b> - 3000K <b>40K</b> - 4000K	◆ ____ ▲ ____ (28 colors)	○ ____ (6 colors) No shine ring: indicate with <b>00</b>	<b>6</b> - 6° <b>22</b> - 22° <b>38</b> - 38°	T ____ (5 colors/ 2 lengths)	<table border="1"> <thead> <tr> <th>CCT</th> <th>6°</th> <th>22°</th> <th>38°</th> </tr> </thead> <tbody> <tr> <td>27K/27K</td> <td>712</td> <td>656</td> <td>691</td> </tr> <tr> <td>30K/30K</td> <td>750</td> <td>690</td> <td>728</td> </tr> <tr> <td>35K/30K</td> <td>770</td> <td>709</td> <td>748</td> </tr> <tr> <td>40K/40K</td> <td>793</td> <td>730</td> <td>770</td> </tr> </tbody> </table>	CCT	6°	22°	38°	27K/27K	712	656	691	30K/30K	750	690	728	35K/30K	770	709	748	40K/40K	793
CCT	6°	22°	38°																									
27K/27K	712	656	691																									
30K/30K	750	690	728																									
35K/30K	770	709	748																									
40K/40K	793	730	770																									

### HANGOVER PLUG MICRO-DOT

MICRO-DOT Ø28 H:150	A380393-						qty														
		Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Reflector	Cable	Delivered Lumen (lm)													
			<b>DN</b> - Non Dim <b>DV</b> - 0-10V	<b>27K</b> -2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	◆ ____ ▲ ____ (28 colors)	<b>32</b> - 32° <b>58</b> - 58°	T ____ (5 colors/ 2 lengths)	<table border="1"> <thead> <tr> <th>CCT</th> <th>32°</th> <th>58°</th> </tr> </thead> <tbody> <tr> <td>2700K</td> <td>283</td> <td>310</td> </tr> <tr> <td>3000K</td> <td>300</td> <td>328</td> </tr> <tr> <td>3500K</td> <td>317</td> <td>347</td> </tr> <tr> <td>4000K</td> <td>325</td> <td>356</td> </tr> </tbody> </table>	CCT	32°	58°	2700K	283	310	3000K	300	328	3500K	317	347	4000K
CCT	32°	58°																			
2700K	283	310																			
3000K	300	328																			
3500K	317	347																			
4000K	325	356																			

## HYPRO 40 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

INSERTS

### HANGOVER PLUG MICRO-DOT

#### FINISHES OPTIONS:

See page 21 for color options and use 2 digit numbers to indicate your choices

MICRO-DOT Ø28 H:300	A380395-						qty		
Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Reflector	Cable	Delivered Lumen (lm)			
	DN - Non Dim	27K -2700K	◆ ___	32 - 32°	T ___ (5 colors/ 2 lengths)	CCT	32°	58°	
	DV - 0-10V	30K - 3000K	▲ ___	58 - 58°		2700K	283	310	
		35K - 3500K	(28 colors)			3000K	300	328	
		40K - 4000K				3500K	317	347	
						4000K	325	356	
MICRO-DOT Ø28 H:450	A380369-						qty		
Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Reflector	Cable	Delivered Lumen (lm)			
	DN - Non Dim	27K -2700K	◆ ___	32 - 32°	T ___ (5 colors/ 2 lengths)	CCT	32°	58°	
	DV - 0-10V	30K - 3000K	▲ ___	58 - 58°		2700K	283	310	
		35K - 3500K	(28 colors)			3000K	300	328	
		40K - 4000K				3500K	317	347	
						4000K	325	356	
MICRO-DOT Ø40 H:150	A380399-						qty		
Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Reflector	Cable	Delivered Lumen (lm)			
	DN - Non Dim	27K -2700K	◆ ___	32 - 32°	T ___ (5 colors/ 2 lengths)	CCT	32°	58°	
	DV - 0-10V	30K - 3000K	▲ ___	58 - 58°		2700K	283	310	
		35K - 3500K	(28 colors)			3000K	300	328	
		40K - 4000K				3500K	317	347	
						4000K	325	356	
MICRO-DOT Ø40 H:300	A380401-						qty		
Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Reflector	Cable	Delivered Lumen (lm)			
	DN - Non Dim	27K -2700K	◆ ___	32 - 32°	T ___ (5 colors/ 2 lengths)	CCT	32°	58°	
	DV - 0-10V	30K - 3000K	▲ ___	58 - 58°		2700K	283	310	
		35K - 3500K	(28 colors)			3000K	300	328	
		40K - 4000K				3500K	317	347	
						4000K	325	356	
MICRO-DOT Ø40 H:450	A380403-						qty		
Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Reflector	Cable	Delivered Lumen (lm)			
	DN - Non Dim	27K -2700K	◆ ___	32 - 32°	T ___ (5 colors/ 2 lengths)	CCT	32°	58°	
	DV - 0-10V	30K - 3000K	▲ ___	58 - 58°		2700K	283	310	
		35K - 3500K	(28 colors)			3000K	300	328	
		40K - 4000K				3500K	317	347	
						4000K	325	356	

## HYPRO 40 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

### HYPLINE

INSERTS

HYPLINE 705	A380262-	qty						
Wattage: 16.3W	Dimming	CCT - 90 CRI	Diffuser	Delivered Lumen (lm)				
	<b>DN</b> - Non Dim	<b>27K</b> - 2700K	<b>MP</b> - Microprism <b>OP</b> - Opal <b>U</b> - U-Diffusor	  	<b>Diffuser</b>	<b>MP</b>	<b>OP</b>	<b>U</b>
	<b>DV</b> - 0-10V	<b>30K</b> - 3000K			2700K	1405	1511	1797
		<b>35K</b> - 3500K			3000K	1439	1548	1841
		<b>40K</b> - 4000K			3500K	1494	1607	1911
		4000K	1524	1640	1950			

HYPLINE 1128	A380270-	qty						
Wattage: 26W	Dimming	CCT - 90 CRI	Diffuser	Delivered Lumen (lm)				
	<b>DN</b> - Non Dim	<b>27K</b> - 2700K	<b>MP</b> - Microprism <b>OP</b> - Opal <b>U</b> - U-Diffusor	  	<b>Diffuser</b>	<b>MP</b>	<b>OP</b>	<b>U</b>
	<b>DV</b> - 0-10V	<b>30K</b> - 3000K			2700K	2247	2418	2876
		<b>35K</b> - 3500K			3000K	2302	2477	2946
		<b>40K</b> - 4000K			3500K	2390	2572	3059
		4000K	2439	2624	3121			

HYPLINE 1408	A380278-	qty						
Wattage: 32.6W	Dimming	CCT - 90 CRI	Diffuser	Delivered Lumen (lm)				
	<b>DN</b> - Non Dim	<b>27K</b> - 2700K	<b>MP</b> - Microprism <b>OP</b> - Opal <b>U</b> - U-Diffusor	  	<b>Diffuser</b>	<b>MP</b>	<b>OP</b>	<b>U</b>
	<b>DV</b> - 0-10V	<b>30K</b> - 3000K			2700K	2809	3023	3595
		<b>35K</b> - 3500K			3000K	2877	3096	3682
		<b>40K</b> - 4000K			3500K	2987	3214	3823
		4000K	3048	3280	3901			

### MAGIQ

#### FINISHES OPTIONS:

See page 21 for color options and use 2 digit numbers to indicate your choices

MAGIQ 4	A380488-	qty						
Wattage: 13.3W	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)			
	<b>DN</b> - Non Dim	<b>27K</b> - 2700K	<input type="checkbox"/> ____ (2 colors)	<b>8 - 8°</b>  <b>14 - 14°</b>  <b>34 - 34°</b>	<b>CCT</b>	<b>8°</b>	<b>14°</b>	<b>34°</b>
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K			2700K	659	612	781
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K			3000K	712	661	843
		<b>40K</b> - 4000K			3500K	727	675	860
		4000K	742	689	878			

MAGIQ 4 KORONA	A38908-	qty						
Wattage: 13.3W	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)			
	<b>DN</b> - Non Dim	<b>27K</b> - 2700K	<input checked="" type="checkbox"/> ____ (28 colors)	<b>8 - 8°</b>  <b>14 - 14°</b>  <b>34 - 34°</b>	<b>CCT</b>	<b>8°</b>	<b>14°</b>	<b>34°</b>
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K			2700K	659	612	781
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K			3000K	712	661	843
		<b>40K</b> - 4000K			3500K	727	675	860
		4000K	742	689	878			

## HYPRO 40 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS	MAGIQ		FINISHES OPTIONS: See page 21 for color options and use 2 digit numbers to indicate your choices			
		<b>MAGIQ 4 + 4</b>	<b>A380497-</b>	qty		
Wattage: 26.6W		Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)
		<b>DN</b> - Non Dim	<b>27K</b> -2700K	<input type="checkbox"/> ____	<b>8</b> - 8°	CCT 8° 14° 34°
		<b>DP</b> - Phase Dim	<b>30K</b> - 3000K	(2 colors)	<b>14</b> - 14°	2700K 1318 1225 1561
		<b>DV</b> - 0-10V	<b>35K</b> - 3500K		<b>34</b> - 34°	3000K 1423 1322 1685
		<b>40K</b> - 4000K			3500K 1453 1350 1721	
					4000K 1483 1378 1756	
	<b>MAGIQ 4 + 4 KORONA</b>	<b>A38910-</b>	qty			
	Wattage: 26.6W	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)
		<b>DN</b> - Non Dim	<b>27K</b> -2700K	◆ ____	<b>8</b> - 8°	CCT 8° 14° 34°
		<b>DP</b> - Phase Dim	<b>30K</b> - 3000K	(28 colors)	<b>14</b> - 14°	2700K 1318 1225 1561
		<b>DV</b> - 0-10V	<b>35K</b> - 3500K	<input type="checkbox"/> ____	<b>34</b> - 34°	3000K 1423 1322 1685
		<b>40K</b> - 4000K	(2 colors)		3500K 1453 1350 1721	
					4000K 1483 1378 1756	
	<b>MAGIQ 8</b>	<b>A38911-</b>	qty			
	Wattage: 26.6W	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)
		<b>DN</b> - Non Dim	<b>27K</b> -2700K	<input type="checkbox"/> ____	<b>8</b> - 8°	CCT 8° 14° 34°
		<b>DP</b> - Phase Dim	<b>30K</b> - 3000K	(2 colors)	<b>14</b> - 14°	2700K 1318 1225 1561
		<b>DV</b> - 0-10V	<b>35K</b> - 3500K		<b>34</b> - 34°	3000K 1423 1322 1685
		<b>40K</b> - 4000K			3500K 1453 1350 1721	
					4000K 1483 1378 1756	
	<b>MAGIQ 8 KORONA</b>	<b>A38912-</b>	qty			
	Wattage: 26.6W	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)
		<b>DN</b> - Non Dim	<b>27K</b> -2700K	◆ ____	<b>8</b> - 8°	CCT 8° 14° 34°
		<b>DP</b> - Phase Dim	<b>30K</b> - 3000K	(28 colors)	<b>14</b> - 14°	2700K 1318 1225 1561
		<b>DV</b> - 0-10V	<b>35K</b> - 3500K	<input type="checkbox"/> ____	<b>34</b> - 34°	3000K 1423 1322 1685
		<b>40K</b> - 4000K	(2 colors)		3500K 1453 1350 1721	
					4000K 1483 1378 1756	
	<b>MAGIQ 8 + 8</b>	<b>A38913-</b>	qty			
	Wattage: 53.2W	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)
		<b>DN</b> - Non Dim	<b>27K</b> -2700K	<input type="checkbox"/> ____	<b>8</b> - 8°	CCT 8° 14° 34°
		<b>DP</b> - Phase Dim	<b>30K</b> - 3000K	(2 colors)	<b>14</b> - 14°	2700K 2636 2450 3122
		<b>DV</b> - 0-10V	<b>35K</b> - 3500K		<b>34</b> - 34°	3000K 2846 2645 3371
		<b>40K</b> - 4000K			3500K 2907 2701 3443	
					4000K 2966 2756 3513	

## HYPRO 40 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT
TYPE
NOTES
QUANTITY
DATE

INSERTS

### MAGIQ

**FINISHES OPTIONS:**

See page 21 for color options and use 2 digit numbers to indicate your choices

MAGIQ 8 + 8 KORONA	A380519-			qty				
Wattage: 53.2W	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)			
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	◆ ____	<b>8</b> - 8°	<b>CCT</b>	<b>8°</b>	<b>14°</b>	<b>34°</b>
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K	(28 colors)		2700K	2636	2450	3122
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K	□ ____	<b>14</b> - 14°	3000K	2846	2645	3371
		<b>40K</b> - 4000K	(2 colors)		3500K	2907	2701	3443
					4000K	2966	2756	3513

### MAGIQ MICRO-DOT

MAGIQ 4 MICRO-DOT	A380494-			qty		
Wattage: 13.3W	Dimming	CCT - 90 CRI	Reflector	Delivered Lumen (lm)		
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	<b>22</b> - 22°	<b>CCT</b>	<b>22°</b>	<b>38°</b>
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K	<b>38</b> - 38°	2700K	640	588
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K		3000K	691	635
		<b>40K</b> - 4000K		3500K	706	648
				4000K	720	661

MAGIQ 4 + 4 MICRO-DOT	A380504-			qty		
Wattage: 26.6W	Dimming	CCT - 90 CRI	Reflector	Delivered Lumen (lm)		
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	<b>22</b> - 22°	<b>CCT</b>	<b>22°</b>	<b>38°</b>
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K	<b>38</b> - 38°	2700K	1280	1176
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K		3000K	1382	1269
		<b>40K</b> - 4000K		3500K	1411	1297
				4000K	1440	1323

MAGIQ 8 MICRO-DOT	A380513-			qty		
Wattage: 26.6W	Dimming	CCT - 90 CRI	Reflector	Delivered Lumen (lm)		
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	<b>22</b> - 22°	<b>CCT</b>	<b>22°</b>	<b>38°</b>
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K	<b>38</b> - 38°	2700K	1280	1176
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K		3000K	1382	1269
		<b>40K</b> - 4000K		3500K	1411	1297
				4000K	1440	1323

MAGIQ 8 + 8 MICRO-DOT	A380523-			qty		
Wattage: 53.2W	Dimming	CCT - 90 CRI	Reflector	Delivered Lumen (lm)		
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	<b>22</b> - 22°	<b>CCT</b>	<b>22°</b>	<b>38°</b>
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K	<b>38</b> - 38°	2700K	2560	2351
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K		3000K	2763	2538
		<b>40K</b> - 4000K		3500K	2822	2592
				4000K	2880	2645

## HYPRO 40 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS

### MAGIQ WALLWASH

**FINISHES OPTIONS:**

See page 21 for color options and use 2 digit numbers to indicate your choices

MAGIQ HOLLOW WALLWASH	A38915-			qty	
Wattage: 18.7W	Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	<input type="checkbox"/> ____ (2 colors)	2700K	1270
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K		3000K	1270
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K		3500K	1513
	<b>40K</b> - 4000K	4000K		1544	

HOLLOW WALLWASH KORONA	A38916-			qty	
Wattage: 18.7W	Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	◆ ____ (28 colors)	2700K	1270
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K		3000K	1270
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K		3500K	1513
	<b>40K</b> - 4000K	4000K		1544	

MAGIQ WALLWASH	A380532-			qty	
Wattage: 31.3W	Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	<input type="checkbox"/> ____ (2 colors)	2700K	2125
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K		3000K	2260
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K		3500K	2429
	<b>40K</b> - 4000K	4000K		2564	

### OIKO PRO IN

OIKO PRO IN 34°	A380300-			qty	
Wattage: 19.3W	Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	◆ ____ ▲ ____ (28 colors)	CCT	<b>34°</b>
	<b>DV</b> - 0-10V	<b>30K</b> - 3000K		2700K	1510
	<b>35K</b> - 3500K	3000K		1517	
	<b>40K</b> - 4000K	3500K		1588	
				4000K	1603

OIKO PRO IN 36° TW	A380301-			qty	
Wattage: 14.4W	Finish			Delivered Lumen (lm)	
	◆ ____			<b>TUNABLE WHITE</b>	
	▲ ____			2700K - 6500K (MAX)	
	(28 colors)	36°		1081	

## HYPRO 40 SUSPENSION SYSTEM SPECIFICATION SHEET






PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS

### OIKO PRO IN

**FINISHES OPTIONS:**

See page 21 for color options and use 2 digit numbers to indicate your choices

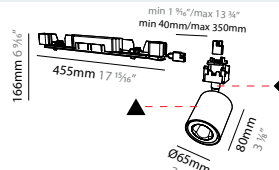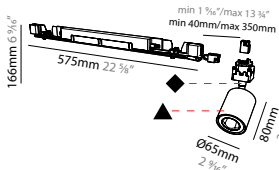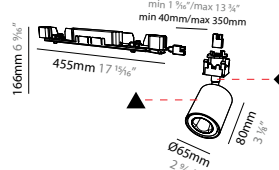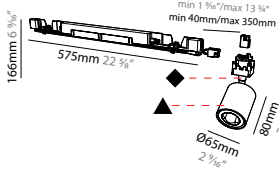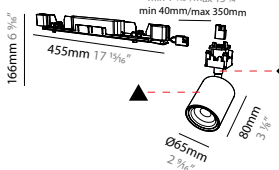OIKO PRO IN 50°		A380302-			qty	
Wattage: 19.3W		Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
	DN - Non Dim	27K - 2700K	◆ ____ ▲ ____ (28 colors)	CCT	50°	
	DV - 0-10V	30K - 3000K		2700K	1656	
		35K - 3500K		3000K	1665	
		40K - 4000K		3500K	1743	
				4000K	1759	
OIKO PRO IN 50° TW		A380303-			qty	
Wattage: 14.4W		Finish			Delivered Lumen (lm)	
	◆ ____			TUNABLE WHITE		
	▲ ____			2700K - 6500K (MAX)		
	(28 colors)	50°	1186			
OIKO PRO IN 60°		A380304-			qty	
Wattage: 19.3W		Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
	DN - Non Dim	27K - 2700K	◆ ____ ▲ ____ (28 colors)	CCT	60°	
	DV - 0-10V	30K - 3000K		2700K	1820	
		35K - 3500K		3000K	1829	
		40K - 4000K		3500K	1914	
				4000K	1932	
OIKO PRO IN 60° TW		A380305-			qty	
Wattage: 14.4W		Finish			Delivered Lumen (lm)	
	◆ ____			TUNABLE WHITE		
	▲ ____			2700K - 6500K (MAX)		
	(28 colors)	62°	1381			
OIKO PRO IN SUPERSPOT		A380308-			qty	
Wattage: 21.1W		Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
	DN - Non Dim	27K - 2700K	◆ ____ ▲ ____ (28 colors)	CCT	14°	
	DV - 0-10V	30K - 3000K		2700K	1278	
		35K - 3500K		3000K	1377	
		40K - 4000K		3500K	1432	
				4000K	1461	

## HYPRO 40 SUSPENSION SYSTEM SPECIFICATION SHEET


PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____


INSERTS

### OIKO PRO IN WALLWASH


**FINISHES OPTIONS:**


See page 21 for color options and use 2 digit numbers to indicate your choices

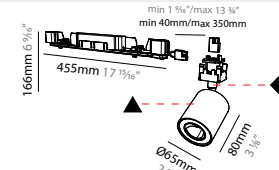
	<b>OIKO PRO IN WALLWASH</b>	<b>A380306-</b>	qty		
	Wattage: 19.3W	Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	◆ —		2700K   1624
	<b>DV</b> - 0-10V	<b>30K</b> - 3000K	▲ —		3000K   1632
		<b>35K</b> - 3500K	(28 colors)		3500K   1708
	<b>40K</b> - 4000K			4000K   1724	

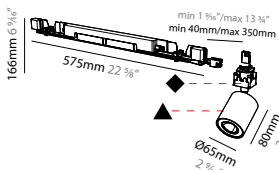	<b>OIKO PRO IN WALLWASH TW</b>	<b>A380307-</b>	qty	
	Wattage: 14.4W	Finish	Delivered Lumen (lm)	
	◆ —	TUNABLE WHITE		
	▲ —	2700K - 6500K (MAX)		
	(28 colors)	1162		

### RICO

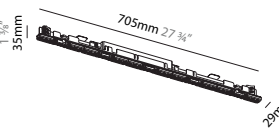	<b>RICO 705</b>	<b>A380436-</b>	qty		
	Wattage: 16.3W	Dimming	CCT - 90 CRI	Reflector	Delivered Lumen (lm)
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	<b>46</b> - 46°		CCT   46°   62°
	<b>DV</b> - 0-10V	<b>30K</b> - 3000K	<b>62</b> - 62°		2700K   1934   1695
		<b>35K</b> - 3500K			3000K   1981   1737
	<b>40K</b> - 4000K			3500K   2057   1803	
				4000K   2099   1840	

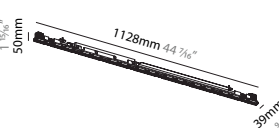	<b>RICO 1128</b>	<b>A380444-</b>	qty		
	Wattage: 26W	Dimming	CCT - 90 CRI	Reflector	Delivered Lumen (lm)
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	<b>46</b> - 46°		CCT   46°   62°
	<b>DV</b> - 0-10V	<b>30K</b> - 3000K	<b>62</b> - 62°		2700K   3095   2713
		<b>35K</b> - 3500K			3000K   3170   2779
	<b>40K</b> - 4000K			3500K   3291   2885	
				4000K   3358   2944	

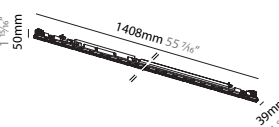	<b>RICO 1408</b>	<b>A380452-</b>	qty		
	Wattage: 32.6W	Dimming	CCT - 90 CRI	Reflector	Delivered Lumen (lm)
	<b>DN</b> - Non Dim	<b>27K</b> -2700K	<b>46</b> - 46°		CCT   46°   62°
	<b>DV</b> - 0-10V	<b>30K</b> - 3000K	<b>62</b> - 62°		2700K   3868   3391
		<b>35K</b> - 3500K			3000K   3962   3473
	<b>40K</b> - 4000K			3500K   4113   3605	
				4000K   4197   3679	



## HYPRO 40 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS

### SIGN DIVA TUBE

#### FINISHES OPTIONS:

See page 21 for color options and use 2 digit numbers to indicate your choices

SIGN DIVA Ø400	A380536-					qty					
	Wattage: 17.2W	Dimming	CCT - 90 CRI	Finish	Shine Ring	Diffuser	Delivered Lumen (lm)				
	<b>DN</b> - Non Dim <b>DV</b> - 0-10V	<b>27K</b> -2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	◆ ____ ▲ ____ (28 colors)	○ ____  (6 colors) No shine ring: indicate with <b>00</b>	____ (4 options)  Use 2 digit numbers below 	Diffuser	<b>01</b>	<b>02</b>	<b>03</b>	<b>04</b>	
						2700K	1807	1611	1868	1656	
						3000K	1943	1733	2009	1781	
						3500K	1959	1747	2025	1796	
4000K	1991	1776	2058	1825							

SIGN DIVA Ø400 KORONA	A380540-					qty				
	Wattage: 17.2W	Dimming	CCT - 90 CRI	Finish	Diffuser	Delivered Lumen (lm)				
	<b>DN</b> - Non Dim <b>DV</b> - 0-10V	<b>27K</b> -2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	◆ ____ ▲ ____ ● ____ (28 colors)	____ (4 options)  Use 2 digit numbers below 	Diffuser	<b>01</b>	<b>02</b>	<b>03</b>	<b>04</b>	
					2700K	1807	1611	1868	1656	
					3000K	1943	1733	2009	1781	
					3500K	1959	1747	2025	1796	
4000K	1991	1776	2058	1825						

SIGN DIVA Ø570	A380544-					qty					
	Wattage: 48.6W	Dimming	CCT - 90 CRI	Finish	Shine Ring	Diffuser	Delivered Lumen (lm)				
	<b>DN</b> - Non Dim <b>DV</b> - 0-10V	<b>27K</b> -2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	◆ ____ ▲ ____ (28 colors)	○ ____  (6 colors) No shine ring: indicate with <b>00</b>	____ (4 options)  Use 2 digit numbers below 	Diffuser	<b>01</b>	<b>02</b>	<b>03</b>	<b>04</b>	
						2700K	4978	4439	5145	4563	
						3000K	5337	4759	5516	4892	
						3500K	5382	4799	5563	4933	
4000K	5494	4899	5679	5035							

SIGN DIVA Ø570 KORONA	A380548-					qty				
	Wattage: 17.2W	Dimming	CCT - 90 CRI	Finish	Diffuser	Delivered Lumen (lm)				
	<b>DN</b> - Non Dim <b>DV</b> - 0-10V	<b>27K</b> -2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	◆ ____ ▲ ____ ● ____ (28 colors)	____ (4 options)  Use 2 digit numbers below 	Diffuser	<b>01</b>	<b>02</b>	<b>03</b>	<b>04</b>	
					2700K	4978	4439	5145	4563	
					3000K	5337	4759	5516	4892	
					3500K	5382	4799	5563	4933	
4000K	5494	4899	5679	5035						

### SNOOKER

SNOOKER	A380422-					qty			
	Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Shine Ring	Reflector	Cable	Delivered Lumen (lm)	
	<b>DN</b> - Non Dim <b>DV</b> - 0-10V	<b>27K</b> -2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	◆ ____ (28 colors)	○ ____  (6 colors) No shine ring: indicate with <b>00</b>	<b>32</b> - 32°  <b>58</b> - 58°	T ____  (5 colors/ 2 lengths)	CCT	<b>32°</b>	<b>58°</b>
							2700K	283	310
							3000K	300	328
							3500K	317	347
4000K	325	356							

## HYPRO 40 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

### SNOOKER

#### FINISHES OPTIONS:

See page 21 for color options and use 2 digit numbers to indicate your choices

INSERTS

SNOOKER METAL	A380430-						qty		
Wattage: 6.4W	Dimming	CCT - 90 CRI	Shine Ring	Reflector	Cable	Delivered Lumen (lm)			
	<b>DN</b> - Non Dim	<b>27K</b> - 2700K	 (6 colors) No shine ring: indicate with <b>00</b>	<b>32</b> - 32°  <b>58</b> - 58°	 (5 colors/ 2 lengths)	CCT	32°	58°	
	<b>DV</b> - 0-10V	<b>30K</b> - 3000K				2700K	283	310	
	<b>35K</b> - 3500K	<b>40K</b> - 4000K				3000K	300	328	
						3500K	317	347	
						4000K	325	356	

COMPONENTS



COVER BLACK	A38892- A38893- A38894-		qty
	Length		
	<b>A38892</b> - 1000mm		Lengths are pre cut at the factory.
	<b>A38893</b> - 2000mm		
	<b>A38894</b> - 3000mm		

KORONA PROFILE	A38895-	qty
	Finish	
	_____	Colored decorative cover profile, max length of a single run is 3000mm 118 1/8\".
	(28 colors)	

## HYPRO 40 SUSPENSION SYSTEM SPECIFICATION SHEET

### RECOMMENDED WALLWASH DISTANCES

Simplified diagrams - it does not reflect the specific photometry of the inserts.  
 Setback and on center spacing depends on the color and texture of your walls.  
 The calculations below were completed with a white wall.

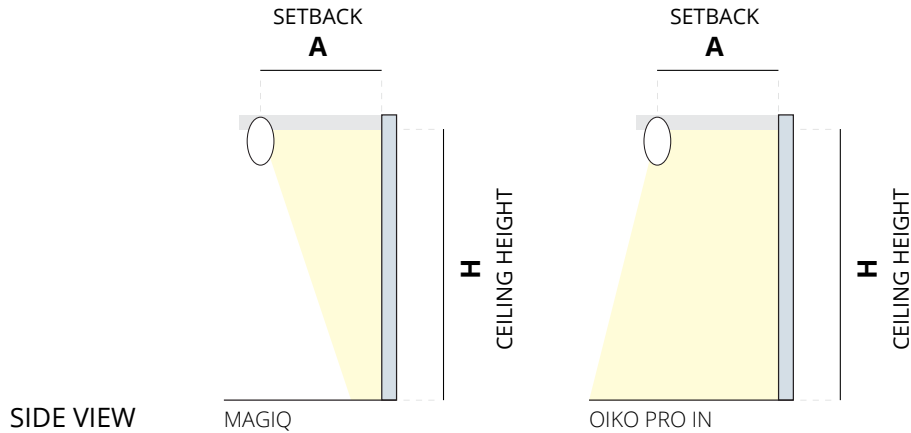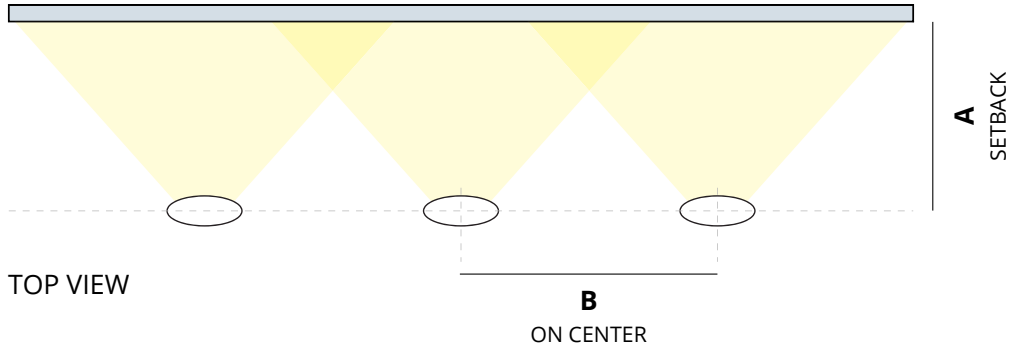

MAGIQ HOLLOW WALLWASH			MAGIQ WALLWASH			OIKO PRO IN WALLWASH		
H	A	B	H	A	B	H	A	B
7' 6.5"	17.5" - 29"	25" - 43"	9' 10"	32" - 35"	40" - 48"	7' 6.5"	18" - 30"	27.5" - 45"
8' 2.5"	19" - 32"	28" - 47"	11' 6"	35" - 40"	48" - 56"	8' 2.5"	19.5" - 33.5"	29.5" - 49"
8' 10"	21" - 34"	31" - 51"	13'	40" - 48"	56" - 63"	8' 10"	21.5" - 35.5"	31.5" - 53"
9' 10"	22.5" - 37.5"	34" - 55"	14' 9"	48" - 56"	63" - 71"	9' 10"	23.5" - 39"	35.5" - 59"

## HYPRO 40 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

### SYSTEM SUMMARY

#### System

##### Type

Suspension  
Rated for Dry Locations Ceiling Mounted

##### Approval Status

Certified to North American Standards

##### Emission

Refer to emission icon beside each light insert and symbol legend for descriptions

##### Efficiency

Acrylic opal diffuser (snap-in) lens 43%  
Micro-prismatic diffuser (snap-in) lens 53%  
Rico-cover diffuser (snap-in) lens

#### Profile

##### Measurement

w 38mm (1 1/2") x ht. 76mm (3")

##### Housing

Anodized extruded aluminum profile available per meter and field-cuttable  
Profiles have a maximum length of 3000mm (9' 10 1/4") and joined together with couplers to ensure uniform appearance and easy installation

##### Suspension Lengths

Standard lengths include 2000mm and 6000mm  
Any custom length must be pre-cut on site  
Maximum custom length available is 10000mm

#### Electrical

##### Connections

Luminaries are pre-wired with a factory installed branch circuit wiring and quick-release connectors  
Through wiring is used to connect the luminaries

##### Power Feed

Located 2 inches from one end of the fixture, on top of the profile  
If a different location is required, please specify  
3 Wires - non-dimming or phase dimming  
4 Wires - two circuits of non-dimming or phase dimming  
5 Wires - 0-10V dimming or dali dimming

##### LED Driver

Integrated with inserts  
Electronic Class 2 driver, Universal 120V/277V  
Non Dimming Driver, Dimming Driver 0-10V (10-100%)  
Consult factory for driver cutsheet  
If a different driver is required, please specify

##### Emergency Inverter Compatible

To be installed remotely, and provided by others  
It can be located up to 250m away from the fixture

Emergency circuit wiring is available upon request (Isolated track with dedicated driver used for emergency circuit will connect to emergency battery pack - supplied by others)

#### General

##### Features

Korona Cone is a glare-reduction cone that sits in front of the reflector - available in 29 standard colors, thus creating a special decorative effect

LFO lenses ensure a glare free downlight without illuminating the luminaries housing and the lowest UGR ratings perfect for residential and hospitality applications

Rico lines use special micro reflectors that improve efficiency and achieve extremely low UGR values (some cases less than 0)

Hadi fixtures with indirect lighting have clearly defined openings in the back to create a subtle glow

##### Custom Requests and Additional Options

Availability depends by insert, system, and configuration  
Must consult factory and allow up to 5 business days for an answer

Special beam angles, special LEDs, CRI 90, RGB-W, tunable, light inserts with different outputs, light inserts on different circuits

Special LEDs optimize luminaries to meet different applications

Gold+ invokes a heavy golden tone intended for bread and pastries


Meat+ displays saturated red light (white parts of product will appear slightly red)

Art+ highlights pieces of art without adversely affecting the perception of individual colors

Fashion+ has the entire color spectrum brilliantly orchestrated without distorting the color temperature

##### Configuration

Consult factory for patterns or custom designs  
Provide configuration drawings



\*Shop drawings provided upon receiving purchase order

#### Warranty

ZANEEN provides a limited warranty from date of purchase to original purchaser

**LED Inserts:** 5 year tested for 50,000 hours at 70% lumen output (L70)

**LED Driver:** 5 year

**Non-Electrical Components:** 1 year

\*Check boxes to complete specification order and submit to quotes@zaneen.com to receive a formal BOM and a finalized model number

\*In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

## HYPRO 40 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT \_\_\_\_\_  
 TYPE \_\_\_\_\_  
 NOTES \_\_\_\_\_  
 QUANTITY \_\_\_\_\_  
 DATE \_\_\_\_\_

### FINISH COLORS




Sparkling Silver - 01



Black Velvet - 02



Crystal White - 03



Creamy - 04



Hampton Bay - 05



Urban Forest - 07



In the Army - 08



Rusty Angel - 09



Fade to Grey - 12



Mysterious Grey - 13



Lost Dream - 15




Purple Sky - 16




Fresh Oh - 17



Funky P - 18



Kissing Aphrodite - 19




Poseidon's Paradise - 20



Blue Sky - 21



Spring Green - 22



Mellow Yellow - 23



Golden Heart - 24



Gun Metal - 25



Champagne Cream - 26



Copper Mine - 27



Ancient Bronze - 28




Jazz Gold - 29




Olive Breeze - 30



Moonlight Silver - 31



Rosewood Red - 32




### FRAME



Black - 02



White - 03



### SHINE RING



Opal - 01



Yellow - 02



Orange - 03



Red - 04



Blue - 05



Green - 06



### CABLE (COLORS/LENGTH)



Black/2m 01



Black/4m 02



White/2m 03



White/4m 04



Orange/2m 05



Orange/4m 06



Red/2m 07



Red/4m 08



Green/2m 09



Green/4m 10



**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

**Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.

**Gun Metal:** No Gun Metal finish is alike. It combines a mixture of transparent and black color particles which ensures a highly individual effect and no luminaire being identical.

**Champagne Cream, Copper Mine, Ancient Bronze + Jazz Gold:** These finishes have slight fading from specific powder coating production. Each luminaire will slightly vary.

RAL Color Upon Request



### LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

### IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

### IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

### WIRING DIAGRAMS


ALL ZANEEN FIXTURES ARE MANUFACTURED TO NORTH AMERICAN ELECTRICAL STANDARDS

Post Sales Support  
HQ 1-800-388-3382 X 625 support@zaneen.com


#### IMPORTANT

- Do NOT connect directly to line voltage
- There is a minimum and maximum load per driver (See fixture and driver specifications).
- Fixture MUST be connected to LED driver, prior to turning power on

#### PHASE/NON-DIMMING WIRING DIAGRAM

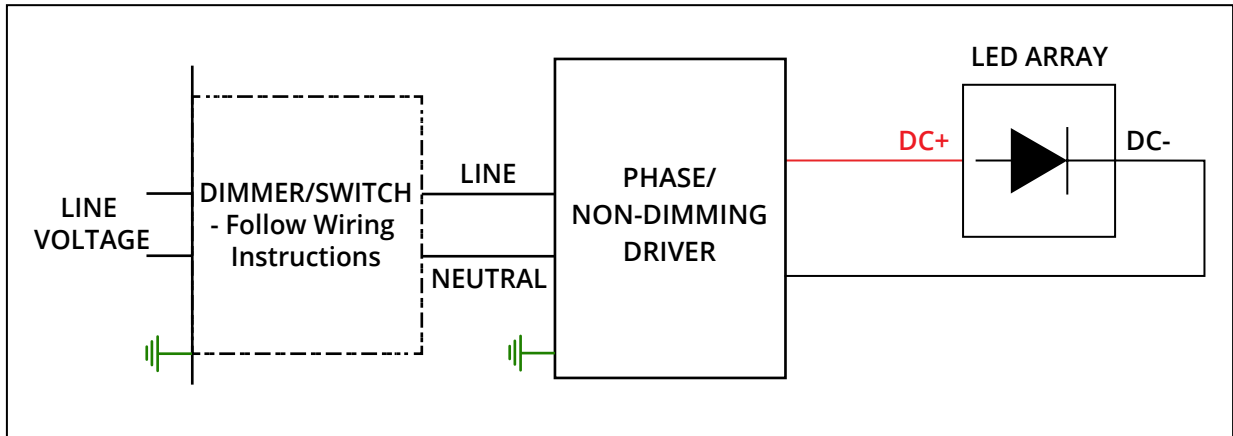

#### 0-10V DIMMING WIRING DIAGRAM

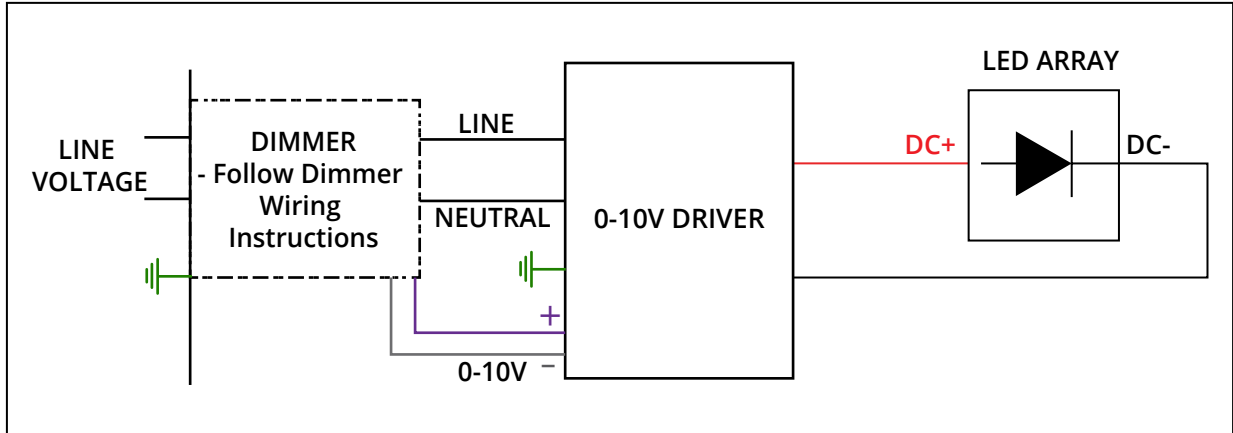

## HYPRO 40 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

Insert custom drawing here or attach with additional pages

