


HYPRO 40-X SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____




ARCHITECTURAL | HYPRO 40-X

HYPRO 40-X creates unique new levels of lighting structure: The individually configurable suspended profile can create floating lines of line thanks to a variety of connectors and nodes. Both general and accent lighting can be integrated into the profile at the same time. In addition to the large number of different downlight modules, Hypro 40-X is also available with uplight modules for indirect ceiling lighting. Direct and indirect lighting can be individually controlled.



The system is equipped with the innovative Rico reflectors, achieving the highest efficiency with a unique glare-free. With additional inserts such as the MAGIQ family, homogeneous illumination is guaranteed. For the most comfortable lighting scenario and greater flexibility, tunable white is available within the system spotlights CENTRIQ IN and OIKO PRO IN.

SYSTEM PROFILE

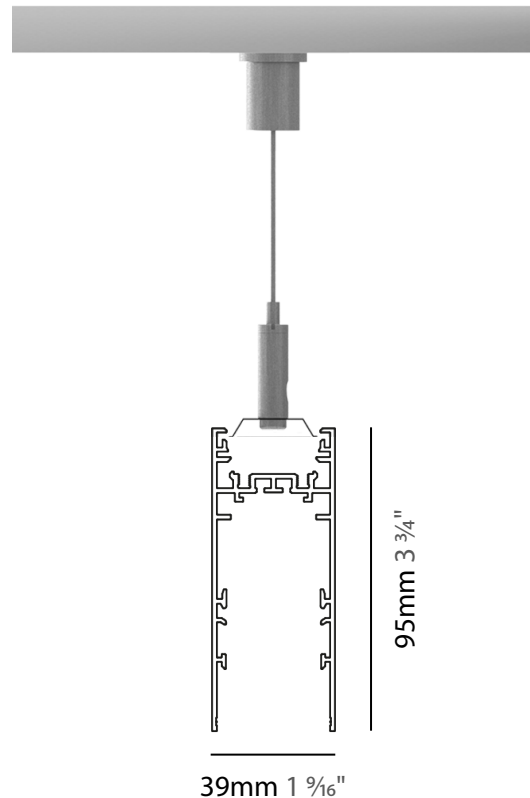

A

HYPRO 40-X SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT _____
 TYPE _____
 NOTES _____
 QUANTITY _____
 DATE _____

SYSTEM GUIDE

To make your product selection and complete system specification, proceed with the following: review system options, create your system code in the field below and include your quantity. For the inserts and components, use the field beside each product name. Submit to quotes@zaneen.com to receive a formal BOM and finalized model numbers.

UPON REQUEST
 Additional Options _____
 _____ Color Temperature
 _____ RGB-W / Tunable
 _____ Lumen Outputs
 _____ Beam Angle
 _____ Special LED
 _____ CRI



EXAMPLE A3HY40X-SUS-SYS-UNV-DN-2C-10"-S-01-01-01-01-2M

SYSTEM BUILD CODE: A3HY40X-SUS-SYS- qty

ELECTRICAL	Voltage	Dimming	Circuit
	UNV - 120/277V	DN - Non Dim	2C - 2 Circuit Operation
	120 - 120V	DP - Phase Dim (Triac/ELV)	EMCIR - Emergency Circuit
	347 - 347V	DV - 0-10V (100-1%) DD - DALI (100-1%)	

LAYOUT	Fixture Head Spacing* (approx.)	Run Shapes	System Finish	Cable Length
	10" - on center	S _____ ' Straight	Profile <input type="checkbox"/> End Cap <input type="checkbox"/> Installation Clip <input type="checkbox"/> Power Feed <input type="checkbox"/>	2M - 2000mm
	20" - on center	L _____ 'x _____'		6M - 6000mm
	30" - on center	U _____ 'x _____'x _____'		
	40" - on center	R _____ 'x _____' Rectangle		
	CUS (XX) - Custom	T _____ 'x _____'		
	*Dependent on fixture specified and length of integral driver	X _____ 'x _____'		

INSERTS	CENTRIQ	INSERT BUILD CODE EXAMPLE: A38897-DN-27K-01-01-01-24		FINISHES OPTIONS: See page 25 for color options and use 2 digit numbers to indicate your choices			
	CENTRIQ Ø30 Wattage: 4.4W	A38897-	Dimming	CCT - 90 CRI	Finish	Reflector	qty Delivered Lumen (lm)
		DN - Non Dim DV - 0-10V	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	◆ _____ ▲ _____ ● _____ (28 colors)	24 - 24° 32 - 32°	CCT 24° 32° 2700K 264 236 3000K 279 249 3500K 295 263 4000K 302 270	
CENTRIQ Ø40 SUPERSPOT Wattage: 6.4W	A38898-	Dimming	CCT - 90 CRI	Finish	Reflector	qty Delivered Lumen (lm)	
	DN - Non Dim DV - 0-10V	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	◆ _____ ▲ _____ ● _____ (28 colors)		CCT 12° 2700K 378 3000K 400 3500K 422 4000K 433		

HYPRO 40-X SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS

CENTRIQ

FINISHES OPTIONS:

See page 25 for color options and use 2 digit numbers to indicate your choices

	CENTRIQ Ø40	A38899-				qty
	Wattage: 6.5W	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)
	DN - Non Dim	27K -2700K	◆ ___	22 - 22°	CCT	22° 30° 34° 38° 48°
	DV - 0-10V	30K - 3000K	▲ ___	30 - 30°	2700K	519 501 379 480 472
		35K - 3500K	● ___	34 - 34°	3000K	544 524 397 502 494
		40K - 4000K	(28 colors)	38 - 38°	3500K	545 525 398 503 495
				48 - 48°	4000K	575 555 420 531 523

	CENTRIQ Ø55 SUPERSPOT	A38900-				qty
	Wattage: 9.1W	Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
	DN - Non Dim	27K -2700K	◆ ___	CCT		
	DV - 0-10V	30K - 3000K	▲ ___	8°		
		35K - 3500K	● ___	2700K 474		
		40K - 4000K	(28 colors)	3000K 502		
				3500K 530		
				4000K 553		

	CENTRIQ Ø55	A380465-				qty
	Wattage: 12W	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)
	DN - Non Dim	27K -2700K	◆ ___	18 - 18°	CCT	18° 26° 34° 36° 52°
	DV - 0-10V	30K - 3000K	▲ ___	26 - 26°	2700K	772 663 795 828 843
		35K - 3500K	● ___	34 - 34°	3000K	808 694 832 867 882
		40K - 4000K	(28 colors)	36 - 36°	3500K	838 719 863 899 915
				52 - 52°	4000K	857 735 882 919 935

	CENTRIQ DOUBLE Ø30	A38902-				qty
	Wattage: 8.8W	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)
	DN - Non Dim	27K -2700K	◆ ___	24 - 24°	CCT	24° 32°
	DV - 0-10V	30K - 3000K	▲ ___	32 - 32°	2700K	527 471
		35K - 3500K	● ___		3000K	558 499
		40K - 4000K	(28 colors)		3500K	589 527
					4000K	605 541

	CENTRIQ DOUBLE Ø40 SUPERSPOT	A38903-				qty
	Wattage: 12.8W	Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
	DN - Non Dim	27K -2700K	◆ ___	CCT		
	DV - 0-10V	30K - 3000K	▲ ___	12°		
		35K - 3500K	● ___	2700K 755		
		40K - 4000K	(28 colors)	3000K 800		
				3500K 844		
				4000K 867		

HYPRO 40-X SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS

CENTRIQ

FINISHES OPTIONS:

See page 25 for color options and use 2 digit numbers to indicate your choices

Wattage:	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)																																				
CENTRIQ DOUBLE Ø40 Wattage: 13.1W	A38904-				qty																																				
	DN - Non Dim DV - 0-10V	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	◆ ___ ▲ ___ ● ___ (28 colors)	22 - 22° 30 - 30° 34 - 34° 38 - 38° 48 - 48°	<table border="1"> <tr> <th colspan="6">Delivered Lumen (lm)</th> </tr> <tr> <th>CCT</th> <th>22°</th> <th>30°</th> <th>34°</th> <th>38°</th> <th>48°</th> </tr> <tr> <td>2700K</td> <td>1039</td> <td>1001</td> <td>759</td> <td>960</td> <td>944</td> </tr> <tr> <td>3000K</td> <td>1088</td> <td>1048</td> <td>794</td> <td>1004</td> <td>988</td> </tr> <tr> <td>3500K</td> <td>1090</td> <td>1051</td> <td>796</td> <td>1007</td> <td>990</td> </tr> <tr> <td>4000K</td> <td>1151</td> <td>1109</td> <td>841</td> <td>1063</td> <td>1045</td> </tr> </table>	Delivered Lumen (lm)						CCT	22°	30°	34°	38°	48°	2700K	1039	1001	759	960	944	3000K	1088	1048	794	1004	988	3500K	1090	1051	796	1007	990	4000K	1151	1109	841	1063	1045
Delivered Lumen (lm)																																									
CCT	22°	30°	34°	38°	48°																																				
2700K	1039	1001	759	960	944																																				
3000K	1088	1048	794	1004	988																																				
3500K	1090	1051	796	1007	990																																				
4000K	1151	1109	841	1063	1045																																				
CENTRIQ DOUBLE Ø55 SUPERSPOT Wattage: 18.2W	A38905-				qty																																				
	DN - Non Dim DV - 0-10V	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	◆ ___ ▲ ___ ● ___ (28 colors)		<table border="1"> <tr> <th colspan="2">Delivered Lumen (lm)</th> </tr> <tr> <th>CCT</th> <th>8°</th> </tr> <tr> <td>2700K</td> <td>948</td> </tr> <tr> <td>3000K</td> <td>1004</td> </tr> <tr> <td>3500K</td> <td>1060</td> </tr> <tr> <td>4000K</td> <td>1105</td> </tr> </table>	Delivered Lumen (lm)		CCT	8°	2700K	948	3000K	1004	3500K	1060	4000K	1105																								
Delivered Lumen (lm)																																									
CCT	8°																																								
2700K	948																																								
3000K	1004																																								
3500K	1060																																								
4000K	1105																																								
CENTRIQ DOUBLE Ø55 Wattage: 23.9W	A38906-				qty																																				
	DN - Non Dim DV - 0-10V	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	◆ ___ ▲ ___ ● ___ (28 colors)	18 - 18° 26 - 26° 34 - 34° 36 - 36° 52 - 52°	<table border="1"> <tr> <th colspan="6">Delivered Lumen (lm)</th> </tr> <tr> <th>CCT</th> <th>18°</th> <th>26°</th> <th>34°</th> <th>36°</th> <th>52°</th> </tr> <tr> <td>2700K</td> <td>1545</td> <td>1326</td> <td>1590</td> <td>1657</td> <td>1686</td> </tr> <tr> <td>3000K</td> <td>1616</td> <td>1387</td> <td>1664</td> <td>1733</td> <td>1764</td> </tr> <tr> <td>3500K</td> <td>1677</td> <td>1439</td> <td>1726</td> <td>1798</td> <td>1830</td> </tr> <tr> <td>4000K</td> <td>1714</td> <td>1471</td> <td>1764</td> <td>1838</td> <td>1871</td> </tr> </table>	Delivered Lumen (lm)						CCT	18°	26°	34°	36°	52°	2700K	1545	1326	1590	1657	1686	3000K	1616	1387	1664	1733	1764	3500K	1677	1439	1726	1798	1830	4000K	1714	1471	1764	1838	1871
Delivered Lumen (lm)																																									
CCT	18°	26°	34°	36°	52°																																				
2700K	1545	1326	1590	1657	1686																																				
3000K	1616	1387	1664	1733	1764																																				
3500K	1677	1439	1726	1798	1830																																				
4000K	1714	1471	1764	1838	1871																																				
CENTRIQ IN Ø65 Wattage: 23W	A380352-				qty																																				
	DN - Non Dim DV - 0-10V	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	◆ ___ ▲ ___ (28 colors)	24 - 24° 36 - 36° 52 - 52°	<table border="1"> <tr> <th colspan="4">Delivered Lumen (lm)</th> </tr> <tr> <th>CCT</th> <th>24°</th> <th>36°</th> <th>52°</th> </tr> <tr> <td>2700K</td> <td>1946</td> <td>2016</td> <td>1975</td> </tr> <tr> <td>3000K</td> <td>2026</td> <td>2099</td> <td>2056</td> </tr> <tr> <td>3500K</td> <td>2113</td> <td>2189</td> <td>2145</td> </tr> <tr> <td>4000K</td> <td>2211</td> <td>2291</td> <td>2245</td> </tr> </table>	Delivered Lumen (lm)				CCT	24°	36°	52°	2700K	1946	2016	1975	3000K	2026	2099	2056	3500K	2113	2189	2145	4000K	2211	2291	2245												
Delivered Lumen (lm)																																									
CCT	24°	36°	52°																																						
2700K	1946	2016	1975																																						
3000K	2026	2099	2056																																						
3500K	2113	2189	2145																																						
4000K	2211	2291	2245																																						
CENTRIQ IN Ø65 TW Wattage: 14.4W	A380353-				qty																																				
	◆ ___ ▲ ___ (28 colors)		18 - 18° 34 - 34° 54 - 54°	00 - No optic 01 - Linear Spread 02 - Spread 03 - Honeycomb	<table border="1"> <tr> <th colspan="2">Delivered Lumen (lm)</th> </tr> <tr> <th colspan="2">TUNABLE WHITE</th> </tr> <tr> <th colspan="2">2700K - 6500K (MAX)</th> </tr> <tr> <th>Reflector</th> <th>Optics</th> </tr> <tr> <td>18°</td> <td>1202</td> </tr> <tr> <td>34°</td> <td>1251</td> </tr> <tr> <td>54°</td> <td>1269</td> </tr> </table>	Delivered Lumen (lm)		TUNABLE WHITE		2700K - 6500K (MAX)		Reflector	Optics	18°	1202	34°	1251	54°	1269																						
Delivered Lumen (lm)																																									
TUNABLE WHITE																																									
2700K - 6500K (MAX)																																									
Reflector	Optics																																								
18°	1202																																								
34°	1251																																								
54°	1269																																								

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

INSERTS

CENTRIQ

FINISHES OPTIONS:

See page 25 for color options and use 2 digit numbers to indicate your choices

	CENTRIQ IN Ø65 SUPERSPOT	A380355-				qty
	Wattage: 21.1W	Dimming	CCT - 90 CRI	Finish	Optics	Delivered Lumen (lm)
	DN - Non Dim	27K - 2700K	◆ ___	00 - No optic	CCT	12°
	DV - 0-10V	30K - 3000K	▲ ___	01 - Linear Spread	2700K	1483
		35K - 3500K	(28 colors)	02 - Spread	3000K	1465
		40K - 4000K		03 - Honeycomb	3500K	1553
					4000K	1554

	CENTRIQ IN Ø65 FLEX	A380354-				qty	
	Wattage: 20.5W	Dimming	CCT - 90 CRI	Finish		Delivered Lumen (lm)	
	DN - Non Dim	27K - 2700K	◆ ___			CCT	14° - 44°
	DV - 0-10V	30K - 3000K	▲ ___			2700K	1205 - 1127
		35K - 3500K	(28 colors)			3000K	1298 - 1214
		40K - 4000K				3500K	1376 - 1287
						4000K	1377 - 1288

	CENTRIQ IN Ø83	A380357-				qty				
	Wattage: 36.2W	Dimming	CCT - 90 CRI	Finish	Reflector	Optics	Delivered Lumen (lm)			
	DN - Non Dim	27K - 2700K	◆ ___		20 - 20°	00 - No optic	CCT	20°	32°	54°
	DV - 0-10V	30K - 3000K	▲ ___		32 - 32°	01 - Linear Spread	2700K	2923	3030	2916
		35K - 3500K	(28 colors)		54 - 54°	02 - Spread	3000K	3044	3156	3037
		40K - 4000K				03 - Honeycomb	3500K	3173	3290	3166
							4000K	3328	3450	3320

	CENTRIQ IN Ø83 TW	A380358-				qty	
	Wattage: 34.9W	Finish	Reflector	Optics		Delivered Lumen (lm)	
	◆ ___		24 - 24°	00 - No optic		TUNABLE WHITE	
	▲ ___		34 - 34°	01 - Linear Spread		2700K - 6500K (MAX)	
	(28 colors)		54 - 54°	02 - Spread		24°	2893
				03 - Honeycomb		34°	2907
						54°	2805

	CENTRIQ IN Ø83 SUPERSPOT	A380361-				qty	
	Wattage: 25.7W	Dimming	CCT - 90 CRI	Finish	Optics	Delivered Lumen (lm)	
	DN - Non Dim	27K - 2700K	◆ ___		00 - No optic	CCT	12°
	DV - 0-10V	30K - 3000K	▲ ___		01 - Linear Spread	2700K	1609
		35K - 3500K	(28 colors)		02 - Spread	3000K	1733
		40K - 4000K			03 - Honeycomb	3500K	1838
						4000K	1839

HYPRO 40-X SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

INSERTS

CENTRIQ

FINISHES OPTIONS:

See page 25 for color options and use 2 digit numbers to indicate your choices

	CENTRIQ IN Ø83 SUPERSPOT TW	A380362-			qty
	Wattage: 8.2W	Finish	Optics		Delivered Lumen (lm)
		◆ — ▲ — (28 colors)	00 - No optic 01 - Linear Spread 02 - Spread 03 - Honeycomb		TUNABLE WHITE 2700K - 6500K (MAX)
					10° 569

	CENTRIQ IN Ø83 FLEX	A380359-			qty
	Wattage: 20.5W	Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)
		DN - Non Dim DV - 0-10V	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	◆ — ▲ — (28 colors)	CCT 14° - 44° 2700K 2923 3000K 3044 3500K 3261 4000K 3328

	CENTRIQ IN Ø83 FLEX TW	A380360-			qty
	Wattage: 8.2W	Finish	Optics		Delivered Lumen (lm)
		◆ — ▲ — (28 colors)	00 - No optic 01 - Linear Spread 02 - Spread 03 - Honeycomb		TUNABLE WHITE 2700K - 6500K (MAX)
					14° - 46° 479 - 451

HADI

	HADI-M SUSPENDED	A380553-			qty
	Wattage: 37.3W	Dimming	CCT - 90 CRI	Finish	Cable Length
		DN - Non Dim DP - Phase Dim DV - 0-10V	30K - 3000K 35K - 3500K 40K - 4000K	◆ — ▲ — (28 colors)	01 - 2000mm 02 - 6000mm
					3000K 4269 3500K 4311 4000K 4352

	HADI-M SUSPENDED DIR/IND	A380557-			qty
	Wattage: 77.8W	Dimming	CCT - 90 CRI	Finish	Cable Length
		DN - Non Dim DP - Phase Dim DV - 0-10V	30K - 3000K 35K - 3500K 40K - 4000K	◆ — ▲ — (28 colors)	01 - 2000mm 02 - 6000mm
					3000K 5998 3500K 6059 4000K 6119

HYPRO 40-X SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS

HADI

FINISHES OPTIONS:

See page 25 for color options and use 2 digit numbers to indicate your choices

HADI-Q SUSPENDED		A380561-			qty	
Wattage: 37.3W		Dimming	CCT - 90 CRI	Finish	Cable Length	Delivered Lumen (lm)
	DN - Non Dim	30K - 3000K	◆ ____	01 - 2000mm 02 - 6000mm	3000K	3911
	DP - Phase Dim	35K - 3500K	▲ ____		3500K	3949
	DV - 0-10V	40K - 4000K	(28 colors)		4000K	3987
HADI-Q SUSPENDED DIR/IND		A380565-			qty	
Wattage: 77.8W		Dimming	CCT - 90 CRI	Finish	Cable Length	Delivered Lumen (lm)
	DN - Non Dim	30K - 3000K	◆ ____	01 - 2000mm 02 - 6000mm	3000K	5783
	DP - Phase Dim	35K - 3500K	▲ ____		3500K	5841
	DV - 0-10V	40K - 4000K	(28 colors)		4000K	5899
HADI-M INTEGRATED		A380569-			qty	
Wattage: 37.3W		Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
	DN - Non Dim	30K - 3000K	◆ ____	(28 colors)	3000K	4269
	DP - Phase Dim	35K - 3500K			3500K	4311
	DV - 0-10V	40K - 4000K			4000K	4352
HADI-M INTEGRATED DIR/IND		A380573-			qty	
Wattage: 77.8W		Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
	DN - Non Dim	30K - 3000K	◆ ____	(28 colors)	3000K	5998
	DP - Phase Dim	35K - 3500K			3500K	6059
	DV - 0-10V	40K - 4000K			4000K	6119
HADI-Q INTEGRATED		A380577-			qty	
Wattage: 37.3W		Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
	DN - Non Dim	30K - 3000K	◆ ____	(28 colors)	3000K	3911
	DP - Phase Dim	35K - 3500K			3500K	3949
	DV - 0-10V	40K - 4000K			4000K	3987

HYPRO 40-X SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS

HADI

FINISHES OPTIONS:

See page 25 for color options and use 2 digit numbers to indicate your choices

HADI-Q INTEGRATED DIR/IND		A380581-			qty	
Wattage: 77.8W		Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
	DN - Non Dim	30K - 3000K	◆ ____ (28 colors)	3000K	5783	
	DP - Phase Dim	35K - 3500K		3500K	5841	
	DV - 0-10V	40K - 4000K		4000K	5899	

HANGOVER PLUG

HANGOVER PLUG Ø28 H:150		A380406-					qty					
Wattage: 6.4W		Dimming	CCT - 90 CRI	Finish	Shine Ring	Reflector	Cable	Delivered Lumen (lm)				
	DN - Non Dim	27K - 2700K	◆ ____ ▲ ____ (28 colors)	○ ____ (6 colors) No shine ring: indicate with 00	20 - 20°	26 - 26°	56 - 56°	┌ ____ (5 colors/ 2 lengths)	CCT	20°	26°	56°
	DV - 0-10V	30K - 3000K							2700K	403	397	381
	35K - 3500K	3000K							427	420	404	
	40K - 4000K	3500K							451	443	426	
			4000K	463	455	438						

HANGOVER PLUG Ø28 H:300		A380408-					qty					
Wattage: 6.4W		Dimming	CCT - 90 CRI	Finish	Shine Ring	Reflector	Cable	Delivered Lumen (lm)				
	DN - Non Dim	27K - 2700K	◆ ____ ▲ ____ (28 colors)	○ ____ (6 colors) No shine ring: indicate with 00	20 - 20°	26 - 26°	56 - 56°	┌ ____ (5 colors/ 2 lengths)	CCT	20°	26°	56°
	DV - 0-10V	30K - 3000K							2700K	403	397	381
	35K - 3500K	3000K							427	420	404	
	40K - 4000K	3500K							451	443	426	
			4000K	463	455	438						

HANGOVER PLUG Ø28 H:450		A380410-					qty					
Wattage: 6.4W		Dimming	CCT - 90 CRI	Finish	Shine Ring	Reflector	Cable	Delivered Lumen (lm)				
	DN - Non Dim	27K - 2700K	◆ ____ ▲ ____ (28 colors)	○ ____ (6 colors) No shine ring: indicate with 00	20 - 20°	26 - 26°	56 - 56°	┌ ____ (5 colors/ 2 lengths)	CCT	20°	26°	56°
	DV - 0-10V	30K - 3000K							2700K	403	397	381
	35K - 3500K	3000K							427	420	404	
	40K - 4000K	3500K							451	443	426	
			4000K	463	455	438						

HANGOVER PLUG Ø40 H:150		A380412-					qty			
Wattage: 9.8W		Dimming	CCT - 90 CRI	Finish	Shine Ring	Reflector	Cable	Delivered Lumen (lm)		
	DN - Non Dim	27K - 2700K	◆ ____ ▲ ____ (28 colors)	○ ____ (6 colors) No shine ring: indicate with 00	40 - 40°	52 - 52°	┌ ____ (5 colors/ 2 lengths)	CCT	40°	52°
	DV - 0-10V	30K - 3000K						2700K	694	684
	35K - 3500K	3000K						726	716	
	40K - 4000K	3500K						753	742	
			4000K	770	759					

HYPRO 40-X SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS

HANGOVER PLUG

FINISHES OPTIONS:
See page 25 for color options and use 2 digit numbers to indicate your choices

HANGOVER PLUG Ø40 H:300	A380414-							qty		
		Wattage: 9.8W	Dimming	CCT - 90 CRI	Finish	Shine Ring	Reflector	Cable	Delivered Lumen (lm)	
	DN - Non Dim DV - 0-10V	27K -2700K 30K - 3000K 35K - 3500K 40K - 4000K	◆ ____ ▲ ____ (28 colors)	○ ____ (6 colors) No shine ring: indicate with 00	40 - 40° 52 - 52°	T ____ (5 colors/ 2 lengths)	CCT	40°	52°	
							2700K	694	684	
							3000K	726	716	
							3500K	753	742	
							4000K	770	759	

HANGOVER PLUG Ø40 H:450	A380416-							qty		
		Wattage: 9.8W	Dimming	CCT - 90 CRI	Finish	Shine Ring	Reflector	Cable	Delivered Lumen (lm)	
	DN - Non Dim DV - 0-10V	27K -2700K 30K - 3000K 35K - 3500K 40K - 4000K	◆ ____ ▲ ____ (28 colors)	○ ____ (6 colors) No shine ring: indicate with 00	40 - 40° 52 - 52°	T ____ (5 colors/ 2 lengths)	CCT	40°	52°	
							2700K	694	684	
							3000K	726	716	
							3500K	753	742	
							4000K	770	759	

HANGOVER PLUG Ø75 H:150	A380418-							qty			
		Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Shine Ring	Reflector	Cable	Delivered Lumen (lm)		
	DN - Non Dim DV - 0-10V	27K -2700K 30K - 3000K 35K - 3500K 40K - 4000K	◆ ____ ▲ ____ (28 colors)	○ ____ (6 colors) No shine ring: indicate with 00	6 - 6° 22 - 22° 38 - 38°	T ____ (5 colors/ 2 lengths)	CCT	6°	22°	38°	
							2700K	389	335	371	
							3000K	412	355	393	
							3500K	435	375	415	
							4000K	447	385	426	

Ø75 H:150 DIR/IND	A380419-							qty			
		Wattage: 9.6W	Dimming	CCT - Direct	CCT - Indirect	Finish	Shine Ring	Reflector	Cable	Delivered Lumen (lm)	
	DN - Non Dim DV - 0-10V	27K -2700K 30K - 3000K 35K - 3500K 40K - 4000K	27K -2700K 30K - 3000K 40K - 4000K	◆ ____ ▲ ____ (28 colors)	○ ____ (6 colors) No shine ring: indicate with 00	6 - 6° 22 - 22° 38 - 38°	T ____ (5 colors/ 2 lengths)	CCT	6°	22°	38°
								27K/27K	712	656	691
								30K/30K	750	690	728
								35K/30K	770	709	748
								40K/40K	793	730	770

HANGOVER PLUG MICRO-DOT

MICRO-DOT Ø28 H:150	A380407-						qty		
		Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Reflector	Cable	Delivered Lumen (lm)	
	DN - Non Dim DV - 0-10V	27K -2700K 30K - 3000K 35K - 3500K 40K - 4000K	◆ ____ ▲ ____ (28 colors)	32 - 32° 58 - 58°	T ____ (5 colors/ 2 lengths)	CCT	32°	58°	
						2700K	283	310	
						3000K	300	328	
						3500K	317	347	
						4000K	325	356	

HYPRO 40-X SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

INSERTS

HANGOVER PLUG MICRO-DOT

FINISHES OPTIONS:

See page 25 for color options and use 2 digit numbers to indicate your choices

MICRO-DOT Ø28 H:300	A380409-						qty		
Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Reflector	Cable	Delivered Lumen (lm)			
	DN - Non Dim	27K -2700K	◆ ___	32 - 32°	T ___ (5 colors/ 2 lengths)	CCT	32°	58°	
	DV - 0-10V	30K - 3000K	▲ ___	58 - 58°		2700K	283	310	
		35K - 3500K	(28 colors)			3000K	300	328	
		40K - 4000K				3500K	317	347	
						4000K	325	356	
MICRO-DOT Ø28 H:450	A380411-						qty		
Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Reflector	Cable	Delivered Lumen (lm)			
	DN - Non Dim	27K -2700K	◆ ___	32 - 32°	T ___ (5 colors/ 2 lengths)	CCT	32°	58°	
	DV - 0-10V	30K - 3000K	▲ ___	58 - 58°		2700K	283	310	
		35K - 3500K	(28 colors)			3000K	300	328	
		40K - 4000K				3500K	317	347	
						4000K	325	356	
MICRO-DOT Ø40 H:150	A380413-						qty		
Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Reflector	Cable	Delivered Lumen (lm)			
	DN - Non Dim	27K -2700K	◆ ___	32 - 32°	T ___ (5 colors/ 2 lengths)	CCT	32°	58°	
	DV - 0-10V	30K - 3000K	▲ ___	58 - 58°		2700K	283	310	
		35K - 3500K	(28 colors)			3000K	300	328	
		40K - 4000K				3500K	317	347	
						4000K	325	356	
MICRO-DOT Ø40 H:300	A380415-						qty		
Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Reflector	Cable	Delivered Lumen (lm)			
	DN - Non Dim	27K -2700K	◆ ___	32 - 32°	T ___ (5 colors/ 2 lengths)	CCT	32°	58°	
	DV - 0-10V	30K - 3000K	▲ ___	58 - 58°		2700K	283	310	
		35K - 3500K	(28 colors)			3000K	300	328	
		40K - 4000K				3500K	317	347	
						4000K	325	356	
MICRO-DOT Ø40 H:450	A380417-						qty		
Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Reflector	Cable	Delivered Lumen (lm)			
	DN - Non Dim	27K -2700K	◆ ___	32 - 32°	T ___ (5 colors/ 2 lengths)	CCT	32°	58°	
	DV - 0-10V	30K - 3000K	▲ ___	58 - 58°		2700K	283	310	
		35K - 3500K	(28 colors)			3000K	300	328	
		40K - 4000K				3500K	317	347	
						4000K	325	356	

HYPRO 40-X SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS

HYPLINE

HYPLINE 705	A380264-	qty						
Wattage: 16.3W	Dimming	CCT - 90 CRI	Diffuser		Delivered Lumen (lm)			
	DN - Non Dim	27K - 2700K	MP - Microprism OP - Opal U - U-Diffusor	Microprism Opal U-Diffusor	Diffuser	MP	OP	U
	DV - 0-10V	30K - 3000K			2700K	1405	1511	1797
	35K - 3500K	3000K			1439	1548	1841	
	40K - 4000K	3500K			1494	1607	1911	
		4000K			1524	1640	1950	

HYPLINE 1128	A380272-	qty						
Wattage: 26W	Dimming	CCT - 90 CRI	Diffuser		Delivered Lumen (lm)			
	DN - Non Dim	27K - 2700K	MP - Microprism OP - Opal U - U-Diffusor	Microprism Opal U-Diffusor	Diffuser	MP	OP	U
	DV - 0-10V	30K - 3000K			2700K	2247	2418	2876
	35K - 3500K	3000K			2302	2477	2946	
	40K - 4000K	3500K			2390	2572	3059	
		4000K			2439	2624	3121	

HYPLINE 1408	A380280-	qty						
Wattage: 32.6W	Dimming	CCT - 90 CRI	Diffuser		Delivered Lumen (lm)			
	DN - Non Dim	27K - 2700K	MP - Microprism OP - Opal U - U-Diffusor	Microprism Opal U-Diffusor	Diffuser	MP	OP	U
	DV - 0-10V	30K - 3000K			2700K	2809	3023	3595
	35K - 3500K	3000K			2877	3096	3682	
	40K - 4000K	3500K			2987	3214	3823	
		4000K			3048	3280	3901	

HYPRO-X Profile includes LED + diffuser opal (indirect light)



FINISHES OPTIONS:

See page 25 for color options and use 2 digit numbers to indicate your choices


HYPRO-X 1410	A300122-	qty					
Wattage: 21.3W	Dimming	CCT - 90 CRI	Finish	Diffuser	Delivered Lumen (lm)		
	DN - Non Dim	27K - 2700K	◆ ____ (28 colors)	01 - Opal 07 - Linear Scattering Lens	Diffuser	Opal	Linear S. L.
	DV - 0-10V	30K - 3000K			2700K	2314	2068
	35K - 3500K	3000K			2391	2138	
	40K - 4000K	3500K			2412	2156	
		4000K			2432	2174	

HYPRO-X 1410 TW	A300318-	qty			
Wattage: 40.9W	Finish	Diffuser		Delivered Lumen (lm)	
Same as drawing above	◆ ____ (28 colors)	01 - Opal	07 - Linear Scattering Lens	TUNABLE WHITE	
				2700K - 6500K (MAX)	
				Opal	4136
				Linear S. Lens	3697

HYPRO 40-X SUSPENSION SYSTEM SPECIFICATION SHEET




PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS

HYPRO-X Profile includes LED + diffuser opal (indirect light) 

FINISHES OPTIONS:

See page 25 for color options and use 2 digit numbers to indicate your choices

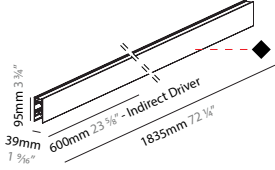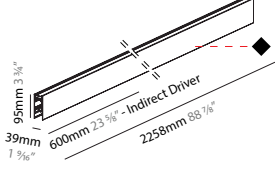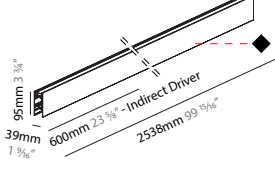HYPRO-X 1835	A300123-			qty			
Wattage: 25.5W	Dimming	CCT - 90 CRI	Finish	Diffuser	Delivered Lumen (lm)		
	DN - Non Dim	27K - 2700K	◆ _____ (28 colors)	01 - Opal 07 - Linear Scattering Lens	Diffuser	Opal	Linear S. L.
	DV - 0-10V	30K - 3000K			2700K	2777	2482
		35K - 3500K			3000K	2870	2565
		40K - 4000K			3500K	2894	2587
					4000K	2918	2609
HYPRO-X 1835 TW	A300319-			qty			
Wattage: 49.1W	Finish	Diffuser		Delivered Lumen (lm)			
Same as drawing above	◆ _____ (28 colors)	01 - Opal 07 - Linear Scattering Lens		TUNABLE WHITE			
				2700K - 6500K (MAX)			
				Opal	4963		
				Linear S. Lens	4437		
HYPRO-X 2258	A300124-			qty			
Wattage: 34.1W	Dimming	CCT - 90 CRI	Finish	Diffuser	Delivered Lumen (lm)		
	DN - Non Dim	27K - 2700K	◆ _____ (28 colors)	01 - Opal 07 - Linear Scattering Lens	Diffuser	Opal	Linear S. L.
	DV - 0-10V	30K - 3000K			2700K	3702	3310
		35K - 3500K			3000K	3826	3420
		40K - 4000K			3500K	3859	3449
					4000K	3891	3478
HYPRO-X 2258 TW	A300320-			qty			
Wattage: 65.5W	Finish	Diffuser		Delivered Lumen (lm)			
Same as drawing above	◆ _____ (28 colors)	01 - Opal 07 - Linear Scattering Lens		TUNABLE WHITE			
				2700K - 6500K (MAX)			
				Opal	6618		
				Linear S. Lens	5915		
HYPRO-X 2538	A300125-			qty			
Wattage: 38.3W	Dimming	CCT - 90 CRI	Finish	Diffuser	Delivered Lumen (lm)		
	DN - Non Dim	27K - 2700K	◆ _____ (28 colors)	01 - Opal 07 - Linear Scattering Lens	Diffuser	Opal	Linear S. L.
	DV - 0-10V	30K - 3000K			2700K	4165	3723
		35K - 3500K			3000K	4304	3848
		40K - 4000K			3500K	4341	3881
					4000K	4377	3913
HYPRO-X 2538 TW	A300321-			qty			
Wattage: 73.7W	Finish	Diffuser		Delivered Lumen (lm)			
Same as drawing above	◆ _____ (28 colors)	01 - Opal 07 - Linear Scattering Lens		TUNABLE WHITE			
				2700K - 6500K (MAX)			
				Opal	7445		
				Linear S. Lens	6655		

HYPRO 40-X SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT
TYPE
NOTES
QUANTITY
DATE

INSERTS

HYPRO-X LINE Profile includes LEDLINE (direct) + LED diffuser opal (indirect)



FINISHES OPTIONS:

See page 25 for color options and use 2 digit numbers to indicate your choices

HYPRO-X LINE 1410	A300114-						qty		
Wattage: 53.8W	Dimming	CCT - Direct	CCT - Indirect	Finish	Direct Diffuser	Delivered Lumen (lm)			
	DN - Non Dim	27K - 2700K	27K - 2700K	◆ ____ (28 colors)	MP - Microprism OP - Opal	Diffuser	MP	OP	
	DV - 0-10V	30K - 3000K	30K - 3000K			27K/27K	4854	5407	
		35K - 3500K	35K - 3500K			30K/30K	4988	5556	
		40K - 4000K	40K - 4000K			35K/35K	5103	5684	
						40K/40K	5207	5800	
HYPRO-X LINE 1835	A300115-						qty		
Wattage: 67.9W	Dimming	CCT - Direct	CCT - Indirect	Finish	Direct Diffuser	Delivered Lumen (lm)			
	DN - Non Dim	27K - 2700K	27K - 2700K	◆ ____ (28 colors)	MP - Microprism OP - Opal	Diffuser	MP	OP	
	DV - 0-10V	30K - 3000K	30K - 3000K			27K/27K	6134	6833	
		35K - 3500K	35K - 3500K			30K/30K	6303	7020	
		40K - 4000K	40K - 4000K			35K/35K	6452	7187	
						40K/40K	6584	7334	
HYPRO-X LINE 2258	A300116-						qty		
Wattage: 86.2W	Dimming	CCT - Direct	CCT - Indirect	Finish	Direct Diffuser	Delivered Lumen (lm)			
	DN - Non Dim	27K - 2700K	27K - 2700K	◆ ____ (28 colors)	MP - Microprism OP - Opal	Diffuser	MP	OP	
	DV - 0-10V	30K - 3000K	30K - 3000K			27K/27K	7766	8650	
		35K - 3500K	35K - 3500K			30K/30K	7981	8889	
		40K - 4000K	40K - 4000K			35K/35K	2412	9094	
						40K/40K	8331	9280	
HYPRO-X LINE 2538	A300117-						qty		
Wattage: 96.9W	Dimming	CCT - Direct	CCT - Indirect	Finish	Direct Diffuser	Delivered Lumen (lm)			
	DN - Non Dim	27K - 2700K	27K - 2700K	◆ ____ (28 colors)	MP - Microprism OP - Opal	Diffuser	MP	OP	
	DV - 0-10V	30K - 3000K	30K - 3000K			27K/27K	8737	9732	
		35K - 3500K	35K - 3500K			30K/30K	8978	10001	
		40K - 4000K	40K - 4000K			35K/35K	2412	10231	
						40K/40K	9373	10440	

HYPRO 40-X SUSPENSION SYSTEM SPECIFICATION SHEET

INSERTS

HYPRO-X RICO Profile includes RICO LEDLINE (direct) + LED diffuser opal (indirect)



FINISHES OPTIONS:

See page 25 for color options and use 2 digit numbers to indicate your choices

HYPRO-X RICO 1410	A300118-						qty		
		Wattage: 53.8W	Dimming	CCT - 90 CRI - Direct	CCT - 90 CRI - Indirect	Finish	Reflector	Delivered Lumen (lm)	
	DN - Non Dim	27K - 2700K	27K - 2700K	◆ _____ (28 colors)	46 - 46° 62 - 62°	CCT	46°	62°	
	DV - 0-10V	30K - 3000K	30K - 3000K			27K/27K	6165	5930	
		35K - 3500K	35K - 3500K			30K/30K	6335	6094	
		40K - 4000K	40K - 4000K			35K/35K	6481	6235	
						40K/40K	6613	6362	

HYPRO-X RICO 1835	A300119-						qty		
		Wattage: 67.9W	Dimming	CCT - 90 CRI - Direct	CCT - 90 CRI - Indirect	Finish	Reflector	Delivered Lumen (lm)	
	DN - Non Dim	27K - 2700K	27K - 2700K	◆ _____ (28 colors)	46 - 46° 62 - 62°	CCT	46°	62°	
	DV - 0-10V	30K - 3000K	30K - 3000K			27K/27K	7791	7495	
		35K - 3500K	35K - 3500K			30K/30K	8005	7700	
		40K - 4000K	40K - 4000K			35K/35K	8196	7884	
						40K/40K	8363	8045	

HYPRO-X RICO 2258	A300120-						qty		
		Wattage: 86.2W	Dimming	CCT - 90 CRI - Direct	CCT - 90 CRI - Indirect	Finish	Reflector	Delivered Lumen (lm)	
	DN - Non Dim	27K - 2700K	27K - 2700K	◆ _____ (28 colors)	46 - 46° 62 - 62°	CCT	46°	62°	
	DV - 0-10V	30K - 3000K	30K - 3000K			27K/27K	9864	9488	
		35K - 3500K	35K - 3500K			30K/30K	10136	9751	
		40K - 4000K	40K - 4000K			35K/35K	10369	9975	
						40K/40K	10581	10179	

HYPRO-X RICO 2538	A300121-						qty		
		Wattage: 96.9W	Dimming	CCT - 90 CRI - Direct	CCT - 90 CRI - Indirect	Finish	Reflector	Delivered Lumen (lm)	
	DN - Non Dim	27K - 2700K	27K - 2700K	◆ _____ (28 colors)	46 - 46° 62 - 62°	CCT	46°	62°	
	DV - 0-10V	30K - 3000K	30K - 3000K			27K/27K	11097	10675	
		35K - 3500K	35K - 3500K			30K/30K	11403	10969	
		40K - 4000K	40K - 4000K			35K/35K	11666	11222	
						40K/40K	11904	11451	

MAGIQ

MAGIQ 4	A380489-					qty		
		Wattage: 13.3W	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)	
	DN - Non Dim	27K - 2700K	□ _____ (2 colors)	8 - 8° 14 - 14° 34 - 34°	CCT	8°	14°	34°
	DP - Phase Dim	30K - 3000K			2700K	659	612	781
	DV - 0-10V	35K - 3500K			3000K	712	661	843
		40K - 4000K			3500K	727	675	860
					4000K	742	689	878

HYPRO 40-X SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT
TYPE
NOTES
QUANTITY
DATE

MAGIQ

FINISHES OPTIONS:

See page 25 for color options and use 2 digit numbers to indicate your choices

INSERTS

MAGIQ 4 KORONA		A380429-			qty				
Wattage: 13.3W		Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)			
	DN - Non Dim DP - Phase Dim DV - 0-10V	27K -2700K 30K - 3000K 35K - 3500K 40K - 4000K	◆ ____ (28 colors) □ ____ (2 colors)	8 - 8° 14 - 14° 34 - 34°	CCT	8°	14°	34°	
					2700K	659	612	781	
					3000K	712	661	843	
					3500K	727	675	860	
					4000K	742	689	878	
MAGIQ 4 + 4		A380498-			qty				
Wattage: 26.6W		Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)			
	DN - Non Dim DP - Phase Dim DV - 0-10V	27K -2700K 30K - 3000K 35K - 3500K 40K - 4000K	□ ____ (2 colors)	8 - 8° 14 - 14° 34 - 34°	CCT	8°	14°	34°	
					2700K	1318	1225	1561	
					3000K	1423	1322	1685	
					3500K	1453	1350	1721	
					4000K	1483	1378	1756	
MAGIQ 4 + 4 KORONA		A380501-			qty				
Wattage: 26.6W		Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)			
	DN - Non Dim DP - Phase Dim DV - 0-10V	27K -2700K 30K - 3000K 35K - 3500K 40K - 4000K	◆ ____ (28 colors) □ ____ (2 colors)	8 - 8° 14 - 14° 34 - 34°	CCT	8°	14°	34°	
					2700K	1318	1225	1561	
					3000K	1423	1322	1685	
					3500K	1453	1350	1721	
					4000K	1483	1378	1756	
MAGIQ 8		A380508-			qty				
Wattage: 26.6W		Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)			
	DN - Non Dim DP - Phase Dim DV - 0-10V	27K -2700K 30K - 3000K 35K - 3500K 40K - 4000K	□ ____ (2 colors)	8 - 8° 14 - 14° 34 - 34°	CCT	8°	14°	34°	
					2700K	1318	1225	1561	
					3000K	1423	1322	1685	
					3500K	1453	1350	1721	
					4000K	1483	1378	1756	
MAGIQ 8 KORONA		A380511-			qty				
Wattage: 26.6W		Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)			
	DN - Non Dim DP - Phase Dim DV - 0-10V	27K -2700K 30K - 3000K 35K - 3500K 40K - 4000K	◆ ____ (28 colors) □ ____ (2 colors)	8 - 8° 14 - 14° 34 - 34°	CCT	8°	14°	34°	
					2700K	1318	1225	1561	
					3000K	1423	1322	1685	
					3500K	1453	1350	1721	
					4000K	1483	1378	1756	

HYPRO 40-X SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS

MAGIQ

FINISHES OPTIONS:

See page 25 for color options and use 2 digit numbers to indicate your choices

MAGIQ 8 + 8	A380517-				qty			
Wattage: 53.2W	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)			
	DN - Non Dim	27K -2700K	<input type="checkbox"/> ____ (2 colors)	8 - 8° 14 - 14° 34 - 34°	CCT	8°	14°	34°
	DP - Phase Dim	30K - 3000K			2700K	2636	2450	3122
	DV - 0-10V	35K - 3500K			3000K	2846	2645	3371
		40K - 4000K			3500K	2907	2701	3443
					4000K	2966	2756	3513

MAGIQ 8 + 8 KORONA	A380520-				qty			
Wattage: 53.2W	Dimming	CCT - 90 CRI	Finish	Reflector	Delivered Lumen (lm)			
	DN - Non Dim	27K -2700K	◆ ____ (28 colors) <input type="checkbox"/> ____ (2 colors)	8 - 8° 14 - 14° 34 - 34°	CCT	8°	14°	34°
	DP - Phase Dim	30K - 3000K			2700K	2636	2450	3122
	DV - 0-10V	35K - 3500K			3000K	2846	2645	3371
		40K - 4000K			3500K	2907	2701	3443
					4000K	2966	2756	3513

MAGIQ MICRO-DOT

MAGIQ 4 MICRO-DOT	A380495-			qty		
Wattage: 13.3W	Dimming	CCT - 90 CRI	Reflector	Delivered Lumen (lm)		
	DN - Non Dim	27K -2700K	22 - 22° 38 - 38°	CCT	22°	38°
	DP - Phase Dim	30K - 3000K		2700K	640	588
	DV - 0-10V	35K - 3500K		3000K	691	635
		40K - 4000K		3500K	706	648
				4000K	720	661

MAGIQ 4 + 4 MICRO-DOT	A380505-			qty		
Wattage: 26.6W	Dimming	CCT - 90 CRI	Reflector	Delivered Lumen (lm)		
	DN - Non Dim	27K -2700K	22 - 22° 38 - 38°	CCT	22°	38°
	DP - Phase Dim	30K - 3000K		2700K	1280	1176
	DV - 0-10V	35K - 3500K		3000K	1382	1269
		40K - 4000K		3500K	1411	1297
				4000K	1440	1323

MAGIQ 8 MICRO-DOT	A380514-			qty		
Wattage: 26.6W	Dimming	CCT - 90 CRI	Reflector	Delivered Lumen (lm)		
	DN - Non Dim	27K -2700K	22 - 22° 38 - 38°	CCT	22°	38°
	DP - Phase Dim	30K - 3000K		2700K	1280	1176
	DV - 0-10V	35K - 3500K		3000K	1382	1269
		40K - 4000K		3500K	1411	1297
				4000K	1440	1323

HYPRO 40-X SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS

MAGIQ MICRO-DOT

FINISHES OPTIONS:

See page 25 for color options and use 2 digit numbers to indicate your choices

MAGIQ 8 + 8 MICRO-DOT	A380524-			qty		
Wattage: 53.2W	Dimming	CCT - 90 CRI	Reflector	Delivered Lumen (lm)		
	DN - Non Dim	27K -2700K	22 - 22°	CCT	22°	38°
	DP - Phase Dim	30K - 3000K	38 - 38°	2700K	2560	2351
	DV - 0-10V	35K - 3500K		3000K	2763	2538
		40K - 4000K		3500K	2822	2592
				4000K	2880	2645

MAGIQ WALLWASH

MAGIQ HOLLOW WALLWASH	A380527-			qty	
Wattage: 18.7W	Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
	DN - Non Dim	27K -2700K	<input type="checkbox"/> ____	2700K	1270
	DP - Phase Dim	30K - 3000K	(2 colors)	3000K	1270
	DV - 0-10V	35K - 3500K		3500K	1513
		40K - 4000K		4000K	1544

HOLLOW WALLWASH KORONA	A380530-			qty	
Wattage: 18.7W	Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
	DN - Non Dim	27K -2700K	<input checked="" type="checkbox"/> ____	2700K	1270
	DP - Phase Dim	30K - 3000K	(28 colors)	3000K	1270
	DV - 0-10V	35K - 3500K	<input type="checkbox"/> ____	3500K	1513
		40K - 4000K	(2 colors)	4000K	1544

MAGIQ WALLWASH	A380533-			qty	
Wattage: 31.3W	Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
	DN - Non Dim	27K -2700K	<input type="checkbox"/> ____	2700K	2125
	DP - Phase Dim	30K - 3000K	(2 colors)	3000K	2260
	DV - 0-10V	35K - 3500K		3500K	2429
		40K - 4000K		4000K	2564

HYPRO 40-X SUSPENSION SYSTEM SPECIFICATION SHEET

INSERTS	OIKO PRO IN				FINISHES OPTIONS: See page 25 for color options and use 2 digit numbers to indicate your choices	
		OIKO PRO IN 34°	A380309-			qty
Wattage: 19.3W		Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
		DN - Non Dim	27K - 2700K	◆ ____	CCT	
		DV - 0-10V	30K - 3000K	▲ ____	34°	
			35K - 3500K	(28 colors)	2700K	1510
		40K - 4000K		3000K	1517	
	OIKO PRO IN 36° TW	A380310-			qty	
	Wattage: 14.4W	Finish			Delivered Lumen (lm)	
		◆ ____			TUNABLE WHITE	
		▲ ____			2700K - 6500K (MAX)	
		(28 colors)			36°	1081
				4000K	1603	
	OIKO PRO IN 50°	A380311-			qty	
	Wattage: 19.3W	Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
		DN - Non Dim	27K - 2700K	◆ ____	CCT	
		DV - 0-10V	30K - 3000K	▲ ____	50°	
			35K - 3500K	(28 colors)	2700K	1656
		40K - 4000K		3000K	1665	
	OIKO PRO IN 50° TW	A380312-			qty	
	Wattage: 14.4W	Finish			Delivered Lumen (lm)	
		◆ ____			TUNABLE WHITE	
		▲ ____			2700K - 6500K (MAX)	
		(28 colors)			50°	1186
				4000K	1759	
	OIKO PRO IN 60°	A380313-			qty	
	Wattage: 19.3W	Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
		DN - Non Dim	27K - 2700K	◆ ____	CCT	
		DV - 0-10V	30K - 3000K	▲ ____	60°	
			35K - 3500K	(28 colors)	2700K	1820
		40K - 4000K		3000K	1829	
	OIKO PRO IN 60° TW	A380313-			qty	
	Wattage: 19.3W	Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)	
		DN - Non Dim	27K - 2700K	◆ ____	CCT	
		DV - 0-10V	30K - 3000K	▲ ____	60°	
			35K - 3500K	(28 colors)	2700K	1820
		40K - 4000K		3000K	1829	

HYPRO 40-X SUSPENSION SYSTEM SPECIFICATION SHEET


PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____


INSERTS

OIKO PRO IN


FINISHES OPTIONS:


See page 25 for color options and use 2 digit numbers to indicate your choices

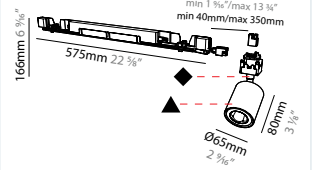	OIKO PRO IN 60° TW	A380314-	qty	
	Wattage: 14.4W	Finish	Delivered Lumen (lm)	
	◆ —	▲ —	TUNABLE WHITE	
	(28 colors)		2700K - 6500K (MAX)	
			62°	1381

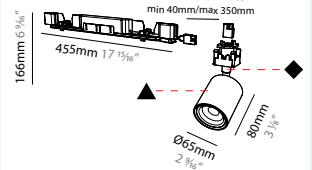	OIKO PRO IN SUPERSPOT	A380317-	qty		
	Wattage: 21.1W	Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)
	DN - Non Dim	27K - 2700K	◆ —	CCT 14°	
	DV - 0-10V	30K - 3000K	▲ —	2700K	1278
		35K - 3500K	(28 colors)	3000K	1377
		40K - 4000K		3500K	1432
			4000K	1461	

OIKO PRO IN WALLWASH

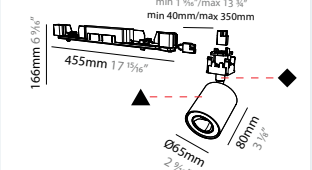	OIKO PRO IN WALLWASH	A380315-	qty		
	Wattage: 19.3W	Dimming	CCT - 90 CRI	Finish	Delivered Lumen (lm)
	DN - Non Dim	27K - 2700K	◆ —	2700K 1624	
	DV - 0-10V	30K - 3000K	▲ —	3000K	1632
		35K - 3500K	(28 colors)	3500K	1708
		40K - 4000K		4000K	1724

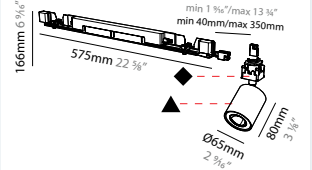	OIKO PRO IN WALLWASH TW	A380316-	qty	
	Wattage: 14.4W	Finish	Delivered Lumen (lm)	
	◆ —	▲ —	TUNABLE WHITE	
	(28 colors)		2700K - 6500K (MAX)	
			1162	

HYPRO 40-X SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS

RICO

FINISHES OPTIONS:

See page 25 for color options and use 2 digit numbers to indicate your choices

	RICO 705	A380438-	qty		
	Wattage: 16.3W	Dimming	CCT - 90 CRI	Reflector	Delivered Lumen (lm)
	DN - Non Dim	27K - 2700K	46 - 46°		
	DV - 0-10V	30K - 3000K	62 - 62°		
		35K - 3500K			
		40K - 4000K			

	RICO 1128	A380446-	qty		
	Wattage: 26W	Dimming	CCT - 90 CRI	Reflector	Delivered Lumen (lm)
	DN - Non Dim	27K - 2700K	46 - 46°		
	DV - 0-10V	30K - 3000K	62 - 62°		
		35K - 3500K			
		40K - 4000K			

	RICO 1408	A380454-	qty		
	Wattage: 32.6W	Dimming	CCT - 90 CRI	Reflector	Delivered Lumen (lm)
	DN - Non Dim	27K - 2700K	46 - 46°		
	DV - 0-10V	30K - 3000K	62 - 62°		
		35K - 3500K			
		40K - 4000K			

SIGN DIVA TUBE

	SIGN DIVA Ø400	A380537-	qty						
	Wattage: 17.2W	Dimming	CCT - 90 CRI	Finish	Shine Ring	Diffuser	Delivered Lumen (lm)		
	DN - Non Dim	27K - 2700K	◆ —	○ —	(4 options) Use 2 digit numbers below 				
	DV - 0-10V	30K - 3000K	▲ —	(6 colors)					
		35K - 3500K	(28 colors)	No shine ring: indicate with 00					
		40K - 4000K							

	SIGN DIVA Ø400 KORONA	A380541-	qty					
	Wattage: 17.2W	Dimming	CCT - 90 CRI	Finish	Diffuser	Delivered Lumen (lm)		
	DN - Non Dim	27K - 2700K	◆ —	(4 options) Use 2 digit numbers below 				
	DV - 0-10V	30K - 3000K	▲ —					
		35K - 3500K	● —					
		40K - 4000K	(28 colors)					

HYPRO 40-X SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS	SIGN DIVA TUBE		FINISHES OPTIONS:					See page 25 for color options and use 2 digit numbers to indicate your choices				
		SIGN DIVA Ø570	A380545-			qty						
Wattage: 48.6W		Dimming	CCT - 90 CRI	Finish	Shine Ring	Diffuser	Delivered Lumen (lm)					
DN - Non Dim		27K - 2700K	◆ _____	○ _____	(4 options)		Diffuser	01	02	03	04	
DV - 0-10V		30K - 3000K	▲ _____	(6 colors)	No shine ring: indicate with 00	Use 2 digit numbers below	2700K	4978	4439	5145	4563	
35K - 3500K		40K - 4000K	(28 colors)	01	02	03	04	3000K	5337	4759	5516	4892
							3500K	5382	4799	5563	4933	
							4000K	5494	4899	5679	5035	
	SIGN DIVA Ø570 KORONA	A380549-			qty							
	Wattage: 17.2W	Dimming	CCT - 90 CRI	Finish	Shine Ring	Diffuser	Delivered Lumen (lm)					
	DN - Non Dim	27K - 2700K	◆ _____	○ _____	(4 options)		Diffuser	01	02	03	04	
	DV - 0-10V	30K - 3000K	▲ _____	(28 colors)	No shine ring: indicate with 00	Use 2 digit numbers below	2700K	4978	4439	5145	4563	
	35K - 3500K	40K - 4000K	(28 colors)	01	02	03	04	3000K	5337	4759	5516	4892
							3500K	5382	4799	5563	4933	
							4000K	5494	4899	5679	5035	
	SNOOKER	A380250-			qty							
	Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Shine Ring	Reflector	Cable	Delivered Lumen (lm)				
	DN - Non Dim	27K - 2700K	◆ _____	○ _____	32 - 32°	┌ _____	CCT	32°	58°			
	DV - 0-10V	30K - 3000K	▲ _____	(28 colors)	(6 colors)	58 - 58°	2700K	283	310			
	35K - 3500K	40K - 4000K	(28 colors)	No shine ring: indicate with 00	(5 colors/ 2 lengths)	3000K	300	328				
						3500K	317	347				
						4000K	325	356				
	SNOOKER METAL	A380431-			qty							
	Wattage: 6.4W	Dimming	CCT - 90 CRI	Shine Ring	Reflector	Cable	Delivered Lumen (lm)					
	DN - Non Dim	27K - 2700K	○ _____	32 - 32°	┌ _____	CCT	32°	58°				
	DV - 0-10V	30K - 3000K	(6 colors)	58 - 58°	(5 colors/ 2 lengths)	2700K	283	310				
	35K - 3500K	40K - 4000K	No shine ring: indicate with 00			3000K	300	328				
					3500K	317	347					
						4000K	325	356				



HYPRO 40-X SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

FINISHES OPTIONS:

See page 25 for color options and use 2 digit numbers to indicate your choices



COMPONENTS

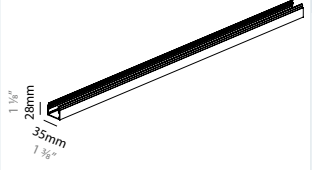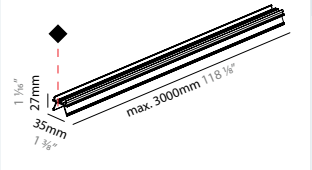	COVER BLACK		qty
	Length	A38892 - 1000mm A38893 - 2000mm A38894 - 3000mm	Lengths are pre cut at the factory.
	KORONA PROFILE	A38895-	qty
	Finish	◆ _____ (28 colors)	Colored decorative cover profile, max length of a single run is 3000mm 118 1/8". Lengths are pre cut at the factory.

HYPRO 40-X SUSPENSION SYSTEM SPECIFICATION SHEET

RECOMMENDED WALLWASH DISTANCES

Simplified diagrams - it does not reflect the specific photometry of the inserts.
 Setback and on center spacing depends on the color and texture of your walls.
 The calculations below were completed with a white wall.

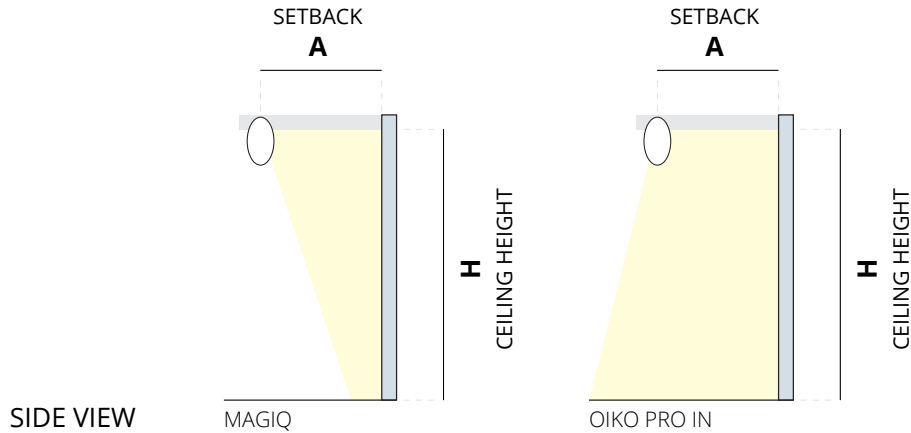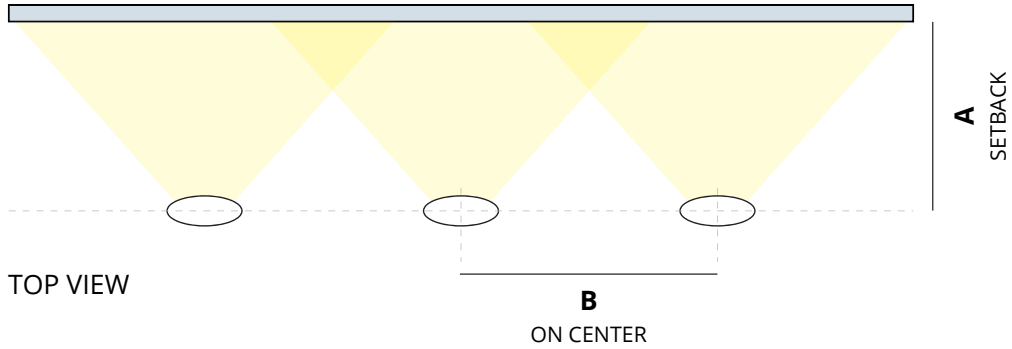

MAGIQ HOLLOW WALLWASH			MAGIQ WALLWASH			OIKO PRO IN WALLWASH		
H	A	B	H	A	B	H	A	B
7' 6.5"	17.5" - 29"	25" - 43"	9' 10"	32" - 35"	40" - 48"	7' 6.5"	18" - 30"	27.5" - 45"
8' 2.5"	19" - 32"	28" - 47"	11' 6"	35" - 40"	48" - 56"	8' 2.5"	19.5" - 33.5"	29.5" - 49"
8' 10"	21" - 34"	31" - 51"	13'	40" - 48"	56" - 63"	8' 10"	21.5" - 35.5"	31.5" - 53"
9' 10"	22.5" - 37.5"	34" - 55"	14' 9"	48" - 56"	63" - 71"	9' 10"	23.5" - 39"	35.5" - 59"

HYPRO 40-X SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

SYSTEM SUMMARY

System

Type

Suspension
Rated for Dry Locations Ceiling Mounted

Approval Status

Certified to North American Standards

Emission

Refer to emission icon beside each light insert and symbol legend for descriptions

Efficiency

Acrylic opal diffuser (snap-in) lens 43%
Micro-prismatic diffuser (snap-in) lens 53%
Rico-cover diffuser (snap-in) lens

Profile

Measurement

w 38mm (1 1/2") x ht. 95mm (3 3/4")

Housing

Anodized extruded aluminum profile available per meter and field-cuttable
Profiles have a maximum length of 3000mm (9' 10 1/4") and joined together with couplers to ensure uniform appearance and easy installation

Suspension Lengths

Standard lengths include 2000mm and 6000mm
Any custom length must be pre-cut on site
Maximum custom length available is 10000mm

Electrical

Connections

Luminaries are pre-wired with a factory installed branch circuit wiring and quick-release connectors
Through wiring is used to connect the luminaries

Power Feed

Located 2 inches from one end of the fixture, on top of the profile
If a different location is required, please specify
3 Wires - non-dimming or phase dimming
4 Wires - two circuits of non-dimming or phase dimming
5 Wires - 0-10V dimming or dali dimming

LED Driver

Integrated with inserts
Electronic Class 2 driver, Universal 120V/277V
Non Dimming Driver, Dimming Driver 0-10V (10-100%)
Consult factory for driver cutsheet
If a different driver is required, please specify

Emergency Inverter Compatible

To be installed remotely, and provided by others
It can be located up to 250m away from the fixture

Emergency circuit wiring is available upon request (Isolated track with dedicated driver used for emergency circuit will connect to emergency battery pack - supplied by others)

General

Features

Korona Cone is a glare-reduction cone that sits in front of the reflector - available in 29 standard colors, thus creating a special decorative effect

LFO lenses ensure a glare free downlight without illuminating the luminaries housing and the lowest UGR ratings perfect for residential and hospitality applications

Rico lines use special micro reflectors that improve efficiency and achieve extremely low UGR values (some cases less than 0)

Hadi fixtures with indirect lighting have clearly defined openings in the back to create a subtle glow

Custom Requests and Additional Options

Availability depends by insert, system, and configuration
Must consult factory and allow up to 5 business days for an answer

Special beam angles, special LEDs, CRI 90, RGB-W, tunable, light inserts with different outputs, light inserts on different circuits

Special LEDs optimize luminaries to meet different applications

Gold+ invokes a heavy golden tone intended for bread and pastries


Meat+ displays saturated red light (white parts of product will appear slightly red)

Art+ highlights pieces of art without adversely affecting the perception of individual colors

Fashion+ has the entire color spectrum brilliantly orchestrated without distorting the color temperature

Configuration

Consult factory for patterns or custom designs
Provide configuration drawings

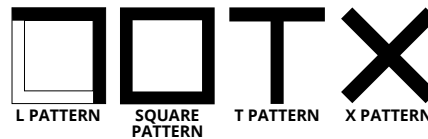

*Shop drawings provided upon receiving purchase order

Warranty

ZANEEN provides a limited warranty from date of purchase to original purchaser

LED Inserts: 5 year tested for 50,000 hours at 70% lumen output (L70)

LED Driver: 5 year

Non-Electrical Components: 1 year


*Check boxes to complete specification order and submit to quotes@zaneen.com to receive a formal BOM and a finalized model number

*In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

HYPRO 40-X SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT _____
 TYPE _____
 NOTES _____
 QUANTITY _____
 DATE _____


FINISH COLORS




Sparkling Silver - 01



Black Velvet - 02




Crystal White - 03



Creamy - 04



Hampton Bay - 05



Urban Forest - 07



In the Army - 08



Rusty Angel - 09



Fade to Grey - 12




Mysterious Grey - 13



Lost Dream - 15



Purple Sky - 16



Fresh Oh - 17



Funky P - 18



Kissing Aphrodite - 19




Poseidon's Paradise - 20




Blue Sky - 21



Spring Green - 22



Mellow Yellow - 23



Golden Heart - 24



Gun Metal - 25



Champagne Cream - 26



Copper Mine - 27



Ancient Bronze - 28




Jazz Gold - 29



Olive Breeze - 30



Moonlight Silver - 31



Rosewood Red - 32




FRAME



Black - 02



White - 03



SHINE RING



Opal - 01



Yellow - 02



Orange - 03



Red - 04



Blue - 05



Green - 06



CABLE (COLORS/LENGTH)



Black/2m 01



Black/4m 02



White/2m 03



White/4m 04



Orange/2m 05



Orange/4m 06



Red/2m 07



Red/4m 08



Green/2m 09



Green/4m 10



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.

Gun Metal: No Gun Metal finish is alike. It combines a mixture of transparent and black color particles which ensures a highly individual effect and no luminaire being identical.

Champagne Cream, Copper Mine, Ancient Bronze + Jazz Gold: These finishes have slight fading from specific powder coating production. Each luminaire will slightly vary.

RAL Color Upon Request



HYPRO 40-X SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

WIRING DIAGRAMS


ALL ZANEEN FIXTURES ARE MANUFACTURED TO NORTH AMERICAN ELECTRICAL STANDARDS

Post Sales Support
HQ 1-800-388-3382 X 625 support@zaneen.com


IMPORTANT

- Do NOT connect directly to line voltage
- There is a minimum and maximum load per driver (See fixture and driver specifications).
- Fixture MUST be connected to LED driver, prior to turning power on

PHASE/NON-DIMMING WIRING DIAGRAM

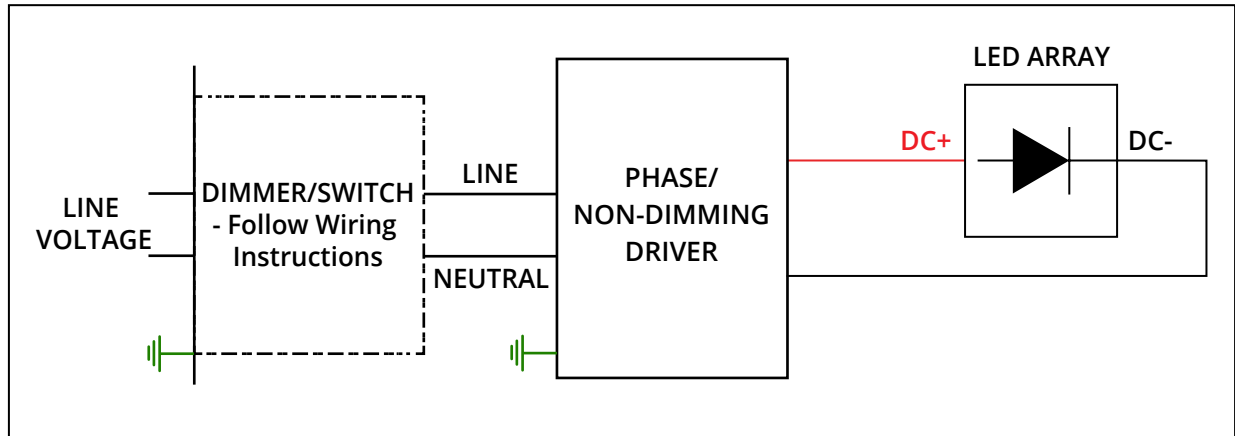

0-10V DIMMING WIRING DIAGRAM

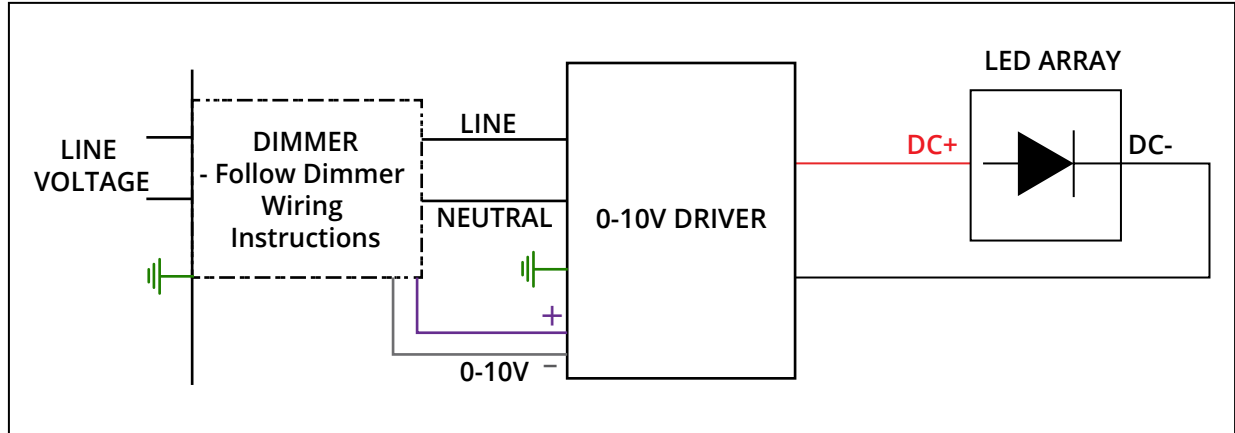

HYPRO 40-X SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

Insert custom drawing here or attach with additional pages

