

CLICKTRACK 30 SUSPENSION SYSTEM

SPECIFICATION SHEET

PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____

ARCHITECTURAL




An optional uplight LED module is available with a diffuser for protection. The up and downlight sections can be controlled separately

UPON REQUEST

- Additional Options**
- Color Temperature
 - Special Beam Angle
 - Special LED
 - RGB-W / Tunable
 - Individual Sizes
 - Different Output



Drawing is Required



PROLIGHT

BUILDING GUIDE

Check boxes to complete specification order and submit to quotes@zaneen.com to receive a formal BOM and finalized model number
For specification purposes, build a unique model number with bold text [30K - DIR - OP - ...]

Quick Ship (QS) - Not Available

Build Code L3CLK30-SUS-SYS-					
Product	Color Temperature	Distribution	Diffuser	Cable	Length
L3CLK30-SUS-SYS Suspension Magtrack 48V	27K 2700K	DIR Direct	OP Opal	2M 2000mm	Alum Profile System length
	30K 3000K	IND Indirect		6M 6000mm	Specify in mm length
	40K 4000K	DIR/IND Direct/Indirect		XM Custom (Upon Request)	Specify in X'-X" qty
					PAT Pattern/Design Ambition (Consult Factory with Drawings) qty

Electrical	Input Voltage	Emergency	Finish	
DN Non-Dimming	UNV Universal 120V / 277V	EMCIR Emergency Circuit	Profile ◆ 01-29	
DV 0-10 Dimming			End Cap ◆ 01-29	
DD Dali Dimming (Upon Request)			Suspension Kit ◆ 01-29	
			Power Supply Unit ◆ 01-29	

refer to color chart
refer to inserts to build code
RAL color # (upon request)

CLICKTRACK 30 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

ALUMINUM PROFILE	Build Code L38930-_- qty					
		Dimension mm	mm ²	Build Code Addition	Finish	
		W: 30 H: 64	per meter	30 - ----	◆ 01-29	
			max 3000mm field-cuttable	enter length up to 3000mm		
		1000 x 30	H: 64	30 - <u>1000</u>		
		2000 x 30	H: 64	30 - <u>2000</u>		
		3000 x 30	H: 64	30 - <u>3000</u>		
END CAP	Build Code L38931- qty					
		Dimension mm	mm ²	Finish		
		30 x 12	H: 64	◆ 01-29		
LINEAR COUPLER	Build Code L38952 qty					
		Dimension mm	mm ²			
		142 x 18	H: 19			
SUSPENSION KIT	Build Code L3895_- qty					
		Dimension mm		Build Code Addition	Finish	Suspension
		26 x 30 L: 2000		5 <u>7</u>	◆ 01-29	200 ↓ 2000mm
		26 x 30 L: 6000		5 <u>8</u>		600 ↓ 6000mm
						XM ↓ Custom
POWER FEED CONNECTOR	Build Code L38803 qty					
		Dimension mm	mm ²			
		143 x 18	H: 16			

CLICKTRACK 30 SUSPENSION SYSTEM SPECIFICATION SHEET



PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____

Build Code		L38959- L38960-						qty										
		↑		Dimension		Build Code		Finish		Suspension								
				mm		mm ²		Addition										
EXTERNAL POWER SUPPLY UNIT DIRECT							528 x 30		H: 64		9 5 9 - DN - Non-Dimming		◆ 01-29		200 ↓ 2000mm			
									0-10V (DV) only available remotely		9 6 0 - DV - 0-10V Dimming				600 ↓ 6000mm		XM ↓ Custom	
Build Code		L38961- L38962-								qty								
		↑		Dimension		Build Code		Finish		Suspension								
				mm		mm ²		Addition										
EXTERNAL POWER SUPPLY UNIT INDIRECT							550 x 30		H: 64		9 6 1 - DN - Non-Dimming		◆ 01-29		200 ↓ 2000mm			
									0-10V (DV) only available remotely		9 6 2 - DV - 0-10V Dimming				600 ↓ 6000mm		XM ↓ Custom	

CLICKTRACK 30 SUSPENSION SYSTEM

SPECIFICATION SHEET

PROJECT _____


TYPE _____

NOTES _____


QUANTITY _____

DATE _____


CLICKLINE INDIRECT 1000

Build Code L38963-								qty
			Wattage	Delivered Lumens	CRI	Diffuser	Dimming	Color Temperature
			9 9.5W	403 403lm	90	OP Opal	DN Non-Dim DV 0-10V	24K 2400K 27K 2700K 30K 3000K

CLICKLINE INDIRECT 2000

Build Code L38964-								qty
			Wattage	Delivered Lumens	CRI	Diffuser	Dimming	Color Temperature
			20 20.1W	851 851lm	90	OP Opal	DN Non-Dim DV 0-10V	24K 2400K 27K 2700K 30K 3000K

CLICKLINE INDIRECT 3000

Build Code L38965-								qty
			Wattage	Delivered Lumens	CRI	Diffuser	Dimming	Color Temperature
			30 30.6W	1299 1299lm	90	OP Opal	DN Non-Dim DV 0-10V	24K 2400K 27K 2700K 30K 3000K

CLICKTRACK 30 SUSPENSION SYSTEM

SPECIFICATION SHEET

PROJECT _____

TYPE _____

NOTES _____


QUANTITY _____

DATE _____

LEDLINE 620

Build Code **L3T086-**

qty


			Wattage	Delivered Lumens	CRI	Diffuser	Dimming	Color Temperature	
			6 6.6W 7 7.9W	360 360lm 540 540lm	90	OP Opal	DN Non-Dim DV 0-10V	27K 2700K 30K 3000K 40K 4000K	

6.6W - Non-Dimming (DN)
7.9W - 0-10V Dimming (DV)

LEDLINE 820

Build Code **L3T087-**

qty


			Wattage	Delivered Lumens	CRI	Diffuser	Dimming	Color Temperature	
			8 8.8W 10 10.6W	480 480lm 720 720lm	90	OP Opal	DN Non-Dim DV 0-10V	27K 2700K 30K 3000K 40K 4000K	

8.8W - Non-Dimming (DN)
10.6W - 0-10V Dimming (DV)

LEDLINE 1020

Build Code **L3T088-**

qty


			Wattage	Delivered Lumens	CRI	Diffuser	Dimming	Color Temperature	
			11 11.0W 13 13.2W	600 600lm 900 900lm	90	OP Opal	DN Non-Dim DV 0-10V	27K 2700K 30K 3000K 40K 4000K	

11.0W - Non-Dimming (DN)
13.2W - 0-10V Dimming (DV)

LEDLINE 1220

Build Code **L3T089-**

qty


			Wattage	Delivered Lumens	CRI	Diffuser	Dimming	Color Temperature	
			13 13.2W 15 15.8W	720 720lm 1080 1080lm	90	OP Opal	DN Non-Dim DV 0-10V	27K 2700K 30K 3000K 40K 4000K	


13.2W - Non-Dimming (DN)
15.8W - 0-10V Dimming (DV)


CLICKTRACK 30 SUSPENSION SYSTEM


SPECIFICATION SHEET

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

Build Code L3T078-			qty								
					Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Finish	Lens
			4	250	90	DN Non-Dim	27K 2700K	◆ 01-29	24		
			4.4W	250lm						24°	
				270						32	
				270lm						32°	
			290	290lm		DV 0-10V	30K 3000K	▲ 01-29			
							40K 4000K				

CENTRIQ 40 SUPER SPOT	Build Code L3T079-		qty						
			Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Finish	Super Spot
			6 6.5W	360 360lm 390 390lm 420 420lm	90	DN Non-Dim DV 0-10V	27K 2700K 30K 3000K 40K 4000K	◆ 01-29 ▲ 01-29	10  10°

Build Code L3T080-			qty						
 			Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Finish	Beam Angle
			6	468	90	DN Non-Dim DV 0-10V	27K	◆ 01-29	20
			6.5W	468lm			2700K		20°
				490			30K		31°
				490lm			3000K		31°
				520			40K		36°
				520lm	4000K	40°	▲ 01-29	36°	
									40°
									50°
									50°

CENTRIQ 55 SUPER SPOT	Build Code L3T081-		qty								
					Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Finish	Super Spot
					9 9.2W	486 486lm 524 524lm 548 548lm	90	DN Non-Dim DV 0-10V	27K 2700K 30K 3000K 40K 4000K	◆ 01-29 ▲ 01-29	9 

CLICKTRACK 30 SUSPENSION SYSTEM

SPECIFICATION SHEET

PROJECT _____

TYPE _____

NOTES _____


QUANTITY _____

DATE _____

CENTRIQ 55

Build Code **L3T082-**


qty

 		 	Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Finish	Lens
			12 12.0W	720 720lm	90	DN Non-Dim DV 0-10V	27K 2700K 30K 3000K 40K 4000K	◆ 01-29	15°
				760 760lm					17°
				820 820lm					25°
									33°
									35°
									46°
									46°

MAGIQ 4

Build Code **L380062-**


qty

 		 	Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Finish	Reflector
			16 16.3W	780 780lm	90	DN Non-Dim DV 0-10V	27K 2700K 30K 3000K 40K 4000K	◆ 01-29	10°
				850 850lm					20°
				880 880lm					40°
									40°

MAGIQ 4 KORONA

Build Code **L380052-**

qty

 		 	Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Finish	Reflector
			16 16.3W	780 780lm	90	DN Non-Dim DV 0-10V	27K 2700K 30K 3000K 40K 4000K	◆ 01-29	10°
				850 850lm					20°
				880 880lm					40°
									40°

CLICKTRACK 30 SUSPENSION SYSTEM SPECIFICATION SHEET





PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____

Build Code L3T090- qty										
SNOOKER				Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Finish	Susp. Cable Color + Length
				6 6.5W	280 280lm 310 310lm 330 330lm	90	DN Non-Dim DV 0-10V	27K 2700K 30K 3000K 40K 4000K	◆ 01-29	T 2000mm 01 BLK 03 WHI 05 ORG 07 RED 09 GRN T 4000mm 02 BLK 04 WHI 06 ORG 08 RED 10 GRN
Build Code L3T091- qty										
SNOOKER SHINE				Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Finish	Shine Ring Susp. Cable Color + Length
				6 6.5W	280 280lm 310 310lm 330 330lm	90	DN Non-Dim DV 0-10V	27K 2700K 30K 3000K 40K 4000K	◆ 01-29	01 Clear 02 Yellow 03 Orange 04 Red 05 Blue 06 Green T 2000mm 01 BLK 03 WHI 05 ORG 07 RED 09 GRN T 4000mm 02 BLK 04 WHI 06 ORG 08 RED 10 GRN
Build Code L3T117- qty										
HANGOVER PLUG 30				Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Finish	Lens Susp. Cable Color + Length
				7 7.0W	328 328lm 363 363lm 386 386lm	90	DN Non-Dim DV 0-10V	27K 2700K 30K 3000K 40K 4000K	◆ 01-29 ▲ 01-29	T 2000mm 01 BLK 03 WHI 05 ORG 07 RED 09 GRN T 4000mm 02 BLK 04 WHI 06 ORG 08 RED 10 GRN 24 24° 32 32° 58 58° 34 34° 55 55°
Build Code L3T118- qty										
HANGOVER PLUG 30				Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Finish	Lens Susp. Cable Color + Length
				7 7.0W	328 328lm 363 363lm 386 386lm	90	DN Non-Dim DV 0-10V	27K 2700K 30K 3000K 40K 4000K	◆ 01-29 ▲ 01-29	T 2000mm 01 BLK 03 WHI 05 ORG 07 RED 09 GRN T 4000mm 02 BLK 04 WHI 06 ORG 08 RED 10 GRN 24 24° 32 32° 58 58° 34 34° 55 55°



CLICKTRACK 30 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

HANGOVER 40	Build Code L3T129-											qty
			Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Finish	Reflector	Shine Ring	Susp. Cable Color + Length	
			10 10.0W	843 843lm	90	DN Non-Dim DV 0-10V	27K 2700K 30K 3000K 40K 4000K	◆ 01-29 ▲ 01-29	40 △ 40° 50 △ 50°	00 XX 01 Clear 02 Yellow 03 Orange 04 Red 05 Blue 06 Green	T 2000mm 01 WHI 02 BLK 03 ORG 04 RED T 6000mm 06 WHI 07 BLK 08 ORG 09 RED	
HANGOVER 40	Build Code L3T130-											qty
			Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Finish	Reflector	Shine Ring	Susp. Cable Color + Length	
			10 10.0W	843 843lm	90	DN Non-Dim DV 0-10V	27K 2700K 30K 3000K 40K 4000K	◆ 01-29 ▲ 01-29	40 △ 40° 50 △ 50°	00 XX 01 Clear 02 Yellow 03 Orange 04 Red 05 Blue 06 Green	T 2000mm 01 WHI 02 BLK 03 ORG 04 RED T 6000mm 06 WHI 07 BLK 08 ORG 09 RED	
HANGOVER 40	Build Code L3T131-											qty
			Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Finish	Reflector	Shine Ring	Susp. Cable Color + Length	
			10 10.0W	843 843lm	90	DN Non-Dim DV 0-10V	27K 2700K 30K 3000K 40K 4000K	◆ 01-29 ▲ 01-29	40 △ 40° 50 △ 50°	00 XX 01 Clear 02 Yellow 03 Orange 04 Red 05 Blue 06 Green	T 2000mm 01 WHI 02 BLK 03 ORG 04 RED T 6000mm 06 WHI 07 BLK 08 ORG 09 RED	
HANGOVER PLUG 40	Build Code L3T132-											qty
			Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Finish	Reflector	Shine Ring	Susp. Cable Color + Length	
			10 10.0W	843 843lm	90	DN Non-Dim DV 0-10V	27K 2700K 30K 3000K 40K 4000K	◆ 01-29 ▲ 01-29	40 △ 40° 50 △ 50°	00 XX 01 Clear 02 Yellow 03 Orange 04 Red 05 Blue 06 Green	T 2000mm 01 BLK 03 WHI 05 ORG 07 RED 09 GRN T 4000mm 02 BLK 04 WHI 06 ORG 08 RED 10 GRN	

CLICKTRACK 30 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT _____

TYPE _____

NOTES _____


QUANTITY _____

DATE _____

HANGOVER PLUG 40

Build Code **L3T133-**


qty

			Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Finish	Reflector	Shine Ring	Susp. Cable Color + Length
			10 10.0W	843 843lm	90	DN Non-Dim DV 0-10V	27K 2700K 30K 3000K 40K 4000K	◆ 01-29 ▲ 01-29	40 △ 40° 50 △ 50°	00 XX 01 Clear 02 Yellow 03 Orange 04 Red 05 Blue 06 Green	2000mm 01 BLK 03 WHI 05 ORG 07 RED 09 GRN 4000mm 02 BLK 04 WHI 06 ORG 08 RED 10 GRN

HANGOVER PLUG 40

Build Code **L3T134-**

qty

		Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Finish	Reflector	Shine Ring	Susp. Cable Color + Length
		10 10.0W	843 843lm	90	DN Non-Dim DV 0-10V	27K 2700K 30K 3000K 40K 4000K	◆ 01-29 ▲ 01-29	40 △ 40° 50 △ 50°	00 XX 01 Clear 02 Yellow 03 Orange 04 Red 05 Blue 06 Green	2000mm 01 BLK 03 WHI 05 ORG 07 RED 09 GRN 4000mm 02 BLK 04 WHI 06 ORG 08 RED 10 GRN

CLICKTRACK 30 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____

HANGOVER 75

Build Code L3T135-

<

CLICKTRACK 30 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT _____




TYPE _____

NOTES _____

QUANTITY _____

DATE _____

HANGOVER 75

Build Code L3T137-											qty			
				Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Finish	Reflector	Shine Ring	Susp. Cable Color + Length		
				10 10.0W	923 923lm	90	DN Non-Dim DV 0-10V	27K 2700K 30K 3000K 40K 4000K	◆ 01-29 ▲ 01-29	18 △ 18° 36 △ 36° 52 △ 52°	00 XX 01 Clear 02 Yellow 03 Orange 04 Red 05 Blue 06 Green	2000mm 01 WHI 02 BLK 03 ORG 04 RED 6000mm 06 WHI 07 BLK 08 ORG 09 RED		
Build Code L3T138-											qty			
				Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Finish	Reflector	Shine Ring	Susp. Cable Color + Length		
				20 20.0W	1821 1821lm	90	DN Non-Dim DV 0-10V	27K 2700K 30K 3000K 40K 4000K DIR - IND 30K - 27K	◆ 01-29 ▲ 01-29	18 △ 18° 36 △ 36° 52 △ 52°	00 XX 01 Clear 02 Yellow 03 Orange 04 Red 05 Blue 06 Green	2000mm 01 WHI 02 BLK 03 ORG 04 RED 6000mm 06 WHI 07 BLK 08 ORG 09 RED		
Build Code L380106-											qty			
				Dimension mm	Indirect Finish	Color Temperature								
 				Ø71	○ Clear ● Yellow ● Orange ● Red ● Blue ● Green	27K 2700K 30K 3000K 40K 4000K								

CLICKTRACK 30 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____

HANGOVER PLUG 75

Build Code **L3T139-**

qty

6 6.0W	432 432lm	90	DN Non-Dim DV 0-10V	27K 2700K 30K 3000K 40K 4000K	01-29 01-29 	9 9° 24 24° 39 39°	00 XX 01 Clear 02 Yellow 03 Orange 04 Red 05 Blue 06 Green	2000mm 01 BLK 03 WHI 05 ORG 07 RED 09 GRN 4000mm 02 BLK 04 WHI 06 ORG 08 RED 10 GRN				

HANGOVER PLUG 75 INDIRECT

Build Code **L3T140-**

qty

9.5 9.5W	778 778lm	90	DN Non-Dim DV 0-10V	27K 2700K 30K 3000K 40K 4000K DIR - IND 30K - 27K	01-29 01-29 	9 9° 24 24° 39 39°	00 XX 01 Clear 02 Yellow 03 Orange 04 Red 05 Blue 06 Green	2000mm 01 BLK 03 WHI 05 ORG 07 RED 09 GRN 4000mm 02 BLK 04 WHI 06 ORG 08 RED 10 GRN				

HANGOVER PLUG 75
INDIRECT DIFFUSER

Build Code **L380106-**

qty


Ø71	Clear Yellow Orange Red Blue Green	27K 2700K 30K 3000K 40K 4000K			

CLICKTRACK 30 SUSPENSION SYSTEM SPECIFICATION SHEET


PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

FINISH COLORS 01-29

Sparkling Silver - 01



Black Velvet - 02



Crystal White - 03



Creamy - 04




Hampton Bay - 05




Lagoon - 06



Urban Forest - 07




In the Army - 08




Rusty Angel - 09



Rusty Rush - 10




Milk and Chocolate - 11



Fade to Gray - 12




Mysterious Gray - 13




Twilight - 14




Lost Dream - 15



Purple Sky - 16




Fresh Oh - 17




Funky P. - 18




Kissing Aphrodite - 19




Poseidon's Paradise - 20




Blue Sky - 21




Spring Green - 22



Mellow Yellow - 23



Golden Heart - 24




Gun Metal - 25



Champagne Cream - 26



Copper Mine - 27



Ancient Bronze - 28



Jazz Gold - 29



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.

Gun Metal: No Gun Metal finish is alike. It combines a mixture of transparent and black color particles which ensures a highly individual effect and no luminaire being identical.

Champagne Cream, Copper Mine, Ancient Bronze + Jazz Gold: These finishes have slight fading from specific powder coating production. Each luminaire will slightly vary.

RAL Color Upon Request



CLICKTRACK 30 SUSPENSION SYSTEM

SPECIFICATION SHEET

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/ control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

CLICKTRACK 30 SUSPENSION SYSTEM

SPECIFICATION SHEET

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

SYSTEM SUMMARY

System

Type
Suspension
Rated for Dry Locations Ceiling Mounted

Approval Status
CSA Certified to CSA and UL Standards

Emission
Refer to emission icon beside each light insert and symbol legend for descriptions

Efficiency
Acrylic Opal Diffuser (snap-in) lens 43%

Profile

Measurement
w 30mm (1 1/2") x ht. 64mm (2 1/2")

Housing
Anodized extruded aluminum profile available per meter and field-cuttable
Profiles have a maximum length of 3000mm (9' 10 5/16") and joined together with couplers to ensure uniform appearance and easy installation

Suspension Lengths
Standard lengths include 2000mm and 6000mm
Any custom length must be pre-cut on site
Maximum custom length available is 10000mm

Electrical

Connections
Luminaries are pre-wired by factory

Power Feed
Located next to the end cap at the end of the fixture, on top of the profile
If a different location is required, please specify
A connector is located on one end of the 48V profile channel to carry the electrical power from the supply unit - there is 165mm (6 1/2") of unusable space for inserts from the end cap
3 Wires - non-dimming or phase dimming
4 Wires - two circuits of non-dimming or phase dimming
5 Wires - 0-10V dimming or dali dimming

LED Driver
Driver Included with Power Supply Unit (Non-dimming only). 0-10V driver must be remote with supplied enclosure. Maximum distance between the power supply and the last fixture on the circuit is 30' using a 18-gauge wire. For more than 30', the gauge of the wire must be determined by a certified professional. The length of the fixture specified must be considered within the maximum distance of 3'. Provisions must be made on site for accessibility to the power supplies.
Electronic Class 2 driver, Universal 120V/277V
Non Dimming Driver, Dimming Driver 0-10V (10-100%)
Consult factory for driver cutsheet
If a different driver is required, please specify

Emergency Inverter Compatible
To be installed remotely, and provided by others
It can be located up to 250m away from the fixture

Emergency circuit wiring is available upon request (Isolated track with dedicated driver used for emergency circuit will connect to emergency battery pack - supplied by others)

General

Features
Korona Cone is a glare-reduction cone that sits in front of the reflector - available in 29 standard colors, thus creating a special decorative effect

LFO lenses ensure a glare free downlight without illuminating the luminaries housing and the lowest UGR ratings perfect for residential and hospitality applications

All spots are mounted simply by clicking them into the track, without the need for tools. The cable of the pendants can be flexibly shortened or extended at any time

The Clicktrack is standard black on the inside, while the outside is available in the 29 colors to complement any interior design concept


An optional uplight LED module is available. The up and downlight sections can be controlled separately

Custom Requests and Additional Options
Availability depends by insert, system, and configuration
Must consult factory and allow up to 5 business days for an answer

Special beam angles, individual sizes, special LEDs, RGB-W, tunable, light inserts with different outputs

Special LEDs optimize luminaries to meet different applications
Gold+ invokes a heavy golden tone intended for bread and pastries
Meat+ displays saturated red light (white parts of product will appear slightly red)
Art+ highlights pieces of art without adversely affecting the perception of individual colors
Fashion+ has the entire color spectrum brilliantly orchestrated without distorting the color temperature

Configuration
Consult factory for patterns or custom designs
Provide configuration drawings



*Shop drawings provided upon receiving purchase order

Warranty

ZANEEN provides a limited warranty from date of purchase to original purchaser

LED Inserts : 5 year tested for 50,000 hours at 70% lumen output (L70)
LED Driver : 5 year
Non-Electrical Components : 1 year

*Check boxes to complete specification order and submit to quotes@zaneen.com to receive a formal BOM and a finalized model number

*In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

CLICKTRACK 30 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT
TYPE
NOTES
QUANTITY
DATE

SYSTEM SUMMARY

Inserts

*Delivered lumens is the maximum possible; using widest lens, optic, or reflector

Linears

Clickline Indirect

Wattage: 9.5W - 30.6W
Lumen: 403lm - 1299lm
Color Temperature: 24K, 27K, 30K
Length: 1000mm (39 3/8") - 3000mm (118 1/8")

Ledline

Wattage: 6.6W - 15.8W
Lumen: 360lm - 1080lm
Color Temperature: 27K, 30K, 40K
Length: 620mm (24 7/16") - 1220mm (48 1/16")

Spots

Centriq Spots

Wattage: 4.4W - 12.0W
Lumen: 250lm - 820lm
Color Temperature: 27K, 30K, 40K
Lens Option: 24°, 32°
Super Spot Option: 9°, 10°
Reflector/Lens Option: 20°, 31°, 36°, 40°, 50° / 15°, 17°, 25°, 33°, 35°, 46°
Available in 29 colors

Downlights

Magiq 4 Downlights

Wattage: 16.3W
Lumen: 780lm - 880lm
Color Temperature: 27K, 30K, 40K
Reflector Option: 10°, 20°, 40°
Korona Available in 29 colors

Pendants

Snooker

Wattage: 6.5W
Lumen: 280lm - 330lm
Color Temperature: 27K, 30K, 40K
Suspension Cable: Black, White, Orange, Red, Green
Shine Ring: Clear, Yellow, Orange, Red, Blue, Green
Available in 29 colors

Hangover Plug 30

Wattage: 7.0W
Lumen: 328lm - 386lm
Color Temperature: 27K, 30K, 40K
LFO Lens Option: 34°, 55°
Lens Option: 24°, 32°, 58°
Suspension Cable: Black, White, Orange, Red, Green
Shine Ring: Clear, Yellow, Orange, Red, Blue, Green
Available in 29 colors

Hangover 40 / Plug

Wattage: 10.0W
Lumen: 843lm
Color Temperature: 27K, 30K, 40K
Reflector Option: 40°, 50°
Suspension Cable: White, Black, Orange, Red / Black, White, Orange, Red, Green
Shine Ring: No Ring, Clear, Yellow, Orange, Red, Blue, Green
Available in 29 colors

Hangover 75 / Plug (Direct & Direct/Indirect)

Wattage: 6.0W - 20.0W
Lumen: 432lm - 1821
Color Temperature: 27K, 30K, 40K
Lens Option: 18°, 36°, 52° / 9°, 24°, 39°
Suspension Cable: White, Black, Orange, Red / Black, White, Orange, Red, Green
Shine Ring: No Ring, Clear, Yellow, Orange, Red, Blue, Green
Indirect: Yellow, Orange, Red, Blue, Green
Available in 29 colors

WIRING DIAGRAMS

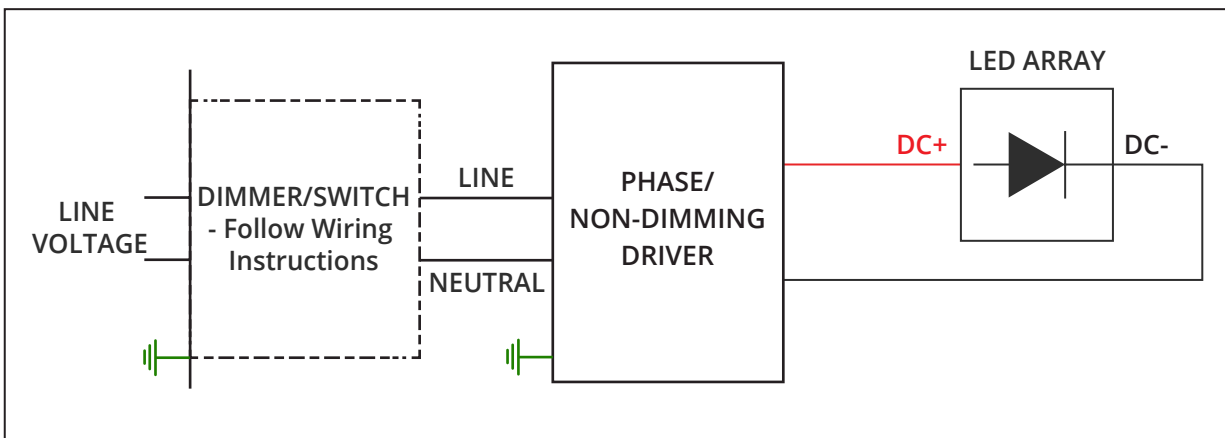
ALL ZANEEN FIXTURES ARE MANUFACTURED TO NORTH AMERICAN ELECTRICAL STANDARDS

Post Sales Support
HQ 1-800-388-3382 X 625 support@zaneen.com


IMPORTANT:

- Do NOT connect directly to line voltage
- There is a minimum and maximum load per driver (See fixture and driver specifications).
- Fixture MUST be connected to LED driver, prior to turning power on

PHASE/NON-DIMMING WIRING DIAGRAM



0-10V DIMMING WIRING DIAGRAM

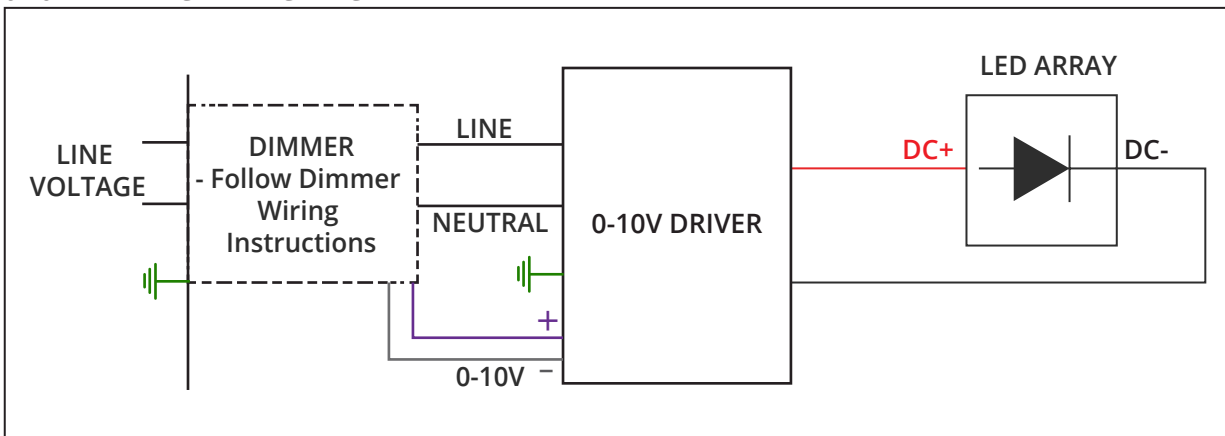



CLICKTRACK 30 SUSPENSION SYSTEM
SPECIFICATION SHEET

PROJECT	
TYPE	
NOTES	
QUANTITY	
DATE	

INSERT CUSTOM DRAWING HERE OR ATTACH WITH ADDITIONAL PAGES