


## HYPRO 40 RECESSED SYSTEM SPECIFICATION SHEET


PROJECT \_\_\_\_\_  
 TYPE \_\_\_\_\_  
 NOTES \_\_\_\_\_  
 QUANTITY \_\_\_\_\_  
 DATE \_\_\_\_\_

ARCHITECTURAL

HYPRO 40 is individually configurable and extremely flexible. With the recessed profile system, you can draw graphical lines in the room thanks to a variety of connectors, even across corner situations. Both general and accent lighting can be integrated into the profile. The glare-free Magiq downlight modules and Magiq Wallwashers are perfect tools to effectively illuminate corridors and hallways



A: Opening width | B: Recess depth  
 C: Profile height | D: Profile width  
 E: Mounting width including trim




Special micro reflectors inside the RICO LINE improve efficiency and achieve extremely low UGR values, sometimes less than 0. The Magiq Micro Dot and Hollow Wallwash complement the Rico Line to ensure a complete glare-free solution

UPON REQUEST

- Additional Options**
- Color Temperature
  - Special Beam Angle
  - Special LED
  - CRI 90
  - RGB-W / Tunable
  - Different Output



Configuration Drawing is Required



### BUILDING GUIDE

Check boxes to complete specification order and submit to [quotes@zaneen.com](mailto:quotes@zaneen.com) to receive a formal BOM and finalized model number. For specification purposes, build a unique model number with bold text [30K - DIR - OP - ...]

Quick Ship (QS) - Not Available

Build Code <b>L3HY40-REC-SYS-</b>					
	Product	Color Temperature	Distribution	Diffuser	Length
<b>PROFILE - SYSTEM</b>	<b>L3HY40-REC-SYS</b> Recessed	<b>27K</b> 2700K	<b>DIR</b> Direct	<b>OP</b> Opal	<b>Alum Profile System</b> length
		<b>30K</b> 3000K			
		<b>35K</b> 3500K			
		<b>40K</b> 4000K			
				<b>MP</b> Microprism	length
				<b>RC</b> Rico Cover	qty
				<b>PAT</b> Pattern/Design Ambition (Consult Factory with Drawings)	qty

	Electrical	Input Voltage	Emergency	Finish	
<b>PROFILE - SYSTEM</b>	<b>DN</b> Non-Dimming	<b>UNV</b> Universal 120V / 277V	<b>EMCIR</b> Emergency Circuit	<b>Profile</b> ◆ 01-29	<b>X-Connector</b> ◆ 01-29
	<b>DV</b> 0-10 Dimming			<b>End Cap</b> ◆ 01-29	<b>Wall/Ceiling Cntr.</b> ◆ 01-29
				<b>L-Connector</b> ◆ 01-29	<b>Korona Profile</b> ◆ 01-29
				<b>T-Connector</b> ◆ 01-29	<b>Korona End Plate</b> ◆ 01-29

◆ ◆ ◆ ◆  
 refer to color chart  
 refer to inserts to build code  
 RAL color # (upon request)

## HYPRO 40 RECESSED SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

Build Code <b>L35641-</b>		Dimension		Finish	qty
ALUMINUM PROFILE		mm			
		<b>W: 50</b> <b>H: 76</b>	<b>per meter</b> max 3000mm field-cuttable	◆ 01-29	
Build Code <b>L38869-</b>		Dimension		Finish	qty
END CAP		mm			
		<b>20 x 50</b> <b>H: 76</b>		◆ 01-29	
Build Code <b>L38870-</b>		Dimension			qty
LINEAR COUPLER		mm			
		<b>150 x 35</b> <b>H: 33</b>			
Build Code <b>L38871-</b>		Dimension		Finish	qty
L-CONNECTOR		mm			
		<b>75 x 75</b> <b>H: 76</b>		◆ 01-29	
Build Code <b>L38872-</b>		Dimension		Finish	qty
T-CONNECTOR		mm			
		<b>75 x 100</b> <b>H: 76</b>		◆ 01-29	

## HYPRO 40 RECESSED SYSTEM SPECIFICATION SHEET

Build Code <b>L38873-</b>		Dimension		Finish	qty
mm		mm			
X-CONNECTOR		<b>100 x 100</b> <b>H: 76</b>		◆ 01-29	
		<b>210 x 50</b> <b>H: 210</b>		◆ 01-29	
Build Code <b>L38875</b>		Dimension			qty
mm		mm			
INSTALLATION CLIP		<b>30 x 16</b> <b>H: 70</b>			
	Build Code <b>L38876</b>		Dimension		
mm		mm			
CENTRAL FEED		<b>31 x 27</b> <b>H: 45</b>			
	Build Code <b>L38877</b>		Dimension		
mm		mm			
CABLE HOLDER		<b>25 x 36</b> <b>H: 22</b>			



PROJECT \_\_\_\_\_  
 TYPE \_\_\_\_\_  
 NOTES \_\_\_\_\_  
 QUANTITY \_\_\_\_\_  
 DATE \_\_\_\_\_

## HYPRO 40 RECESSED SYSTEM SPECIFICATION SHEET

Build Code <b>L38</b> _ _ _ _ -		Dimension		Build Code Addition	qty
		mm			
OPAL DIFFUSER		<b>W: 35 H:28</b>	<b>per meter</b>	<b>8 0 1 1 4</b>	
		<b>L: 705</b>	max 3000mm field-cutttable	<b>8 8 8 0</b>	
		<b>L: 1128</b>		<b>8 0 1 1 5</b>	
		<b>L: 1408</b>		<b>8 8 8 1</b>	
		<b>L: 2113</b>		<b>8 8 8 2</b>	
		<b>L: 2815</b>		<b>8 8 8 3</b>	
Build Code <b>L38</b> _ _ _ _ -					
MICROPRISM DIFFUSER		<b>W: 35 H:28</b>	<b>per meter</b>	<b>8 0 1 1 6</b>	
		<b>L: 705</b>	max 3000mm field-cutttable	<b>8 8 8 4</b>	
		<b>L: 1128</b>		<b>8 0 1 1 7</b>	
		<b>L: 1408</b>		<b>8 8 8 5</b>	
		<b>L: 2113</b>		<b>8 8 8 6</b>	
		<b>L: 2815</b>		<b>8 8 8 7</b>	
Build Code <b>L38</b> _ _ _ _ -					
RICO COVER		<b>W: 35 H:29</b>	<b>per meter</b>	<b>8 0 1 1 8</b>	
		<b>L: 705</b>	max 3000mm field-cutttable	<b>8 8 8 8</b>	
		<b>L: 1128</b>		<b>8 0 1 1 9</b>	
		<b>L: 1408</b>		<b>8 8 8 9</b>	
		<b>L: 1833</b>		<b>8 0 1 2 0</b>	
		<b>L: 2113</b>		<b>8 8 9 0</b>	
<b>L: 2256</b>	<b>8 0 1 2 1</b>				
<b>L: 2536</b>	<b>8 0 1 2 2</b>				
<b>L: 2815</b>	<b>8 8 9 1</b>				
Build Code <b>L3889</b> _ -					
COVER BLACK		<b>1000 x 35</b>	field-cutttable	<b>9 2</b>	
		<b>H: 28</b>		<b>9 3</b>	
		<b>2000 x 35</b>		<b>9 4</b>	
		<b>H: 28</b>			
		<b>3000 x 35</b>			
		<b>H: 28</b>			

## HYPRO 40 RECESSED SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

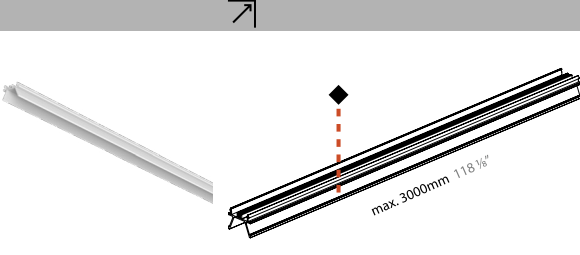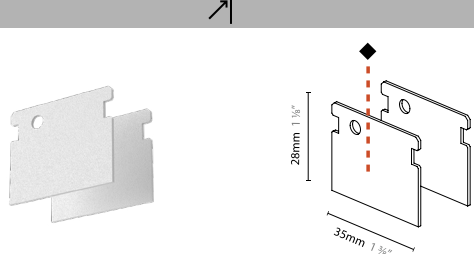


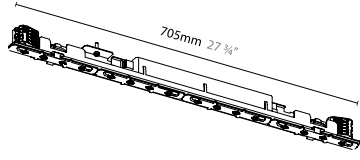
Build Code <b>L38895-</b>		Dimension		Finish	qty
		mm			
KORONA PROFILE		<b>x 35</b> <b>H: 27</b>	<b>per meter</b> max 3000mm field-cutttable	◆ <b>01-29</b>	
Build Code <b>L38896-</b>		Dimension		Finish	qty
		mm			
END PLATE KORONA		<b>1 x 35</b> <b>H: 28</b>	<b>1 Pair</b>	◆ <b>01-29</b>	

## HYPRO 40 RECESSED SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____




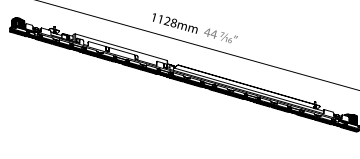
Build Code **L38878-**

qty

HYPLINE 40	 	Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Diffuser	qty
		16 16.5W	1595 1595lm	80	DN Non-Dim DV 0-10V	27K 2700K	OP Opal MP Microprism	
			1702 1702lm			30K 3000K		
			1737 1737lm			35K 3500K		
			1772 1772lm			40K 4000K		




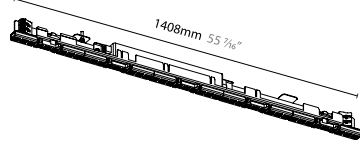
Build Code **L380123-**

qty

HYPLINE 40	 	Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Diffuser	qty
		26.4 26.4W	2552 2552lm	80	DN Non-Dim DV 0-10V	27K 2700K	OP Opal MP Microprism	
			2723 2723lm			30K 3000K		
			2779 2779lm			35K 3500K		
			2836 2836lm			40K 4000K		




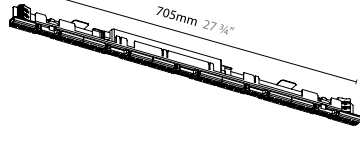
Build Code **L38879-**

qty

HYPLINE 40	 	Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Diffuser	qty
		33 33.0W	3190 3190lm	80	DN Non-Dim DV 0-10V	27K 2700K	OP Opal MP Microprism	
			3403 3403lm			30K 3000K		
			3474 3474lm			35K 3500K		
			3545 3545lm			40K 4000K		




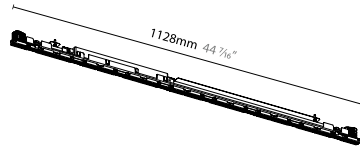
Build Code **L38919-**




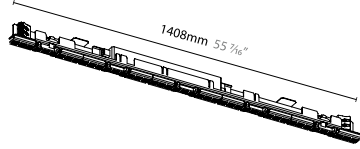
qty






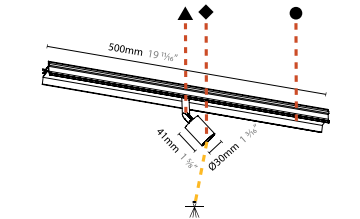
HYP-RICO	 	Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Diffuser	qty
		16 16.5W	1762 1762lm	80	DN Non-Dim DV 0-10V	27K 2700K	RC Rico Cover	
			1879 1879lm			30K 3000K		
			1919 1919lm			35K 3500K		
			1958 1958lm			40K 4000K		






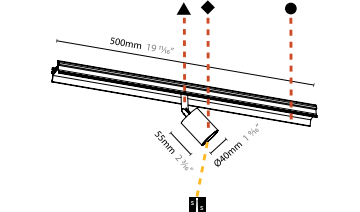
## HYPRO 40 RECESSED SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

HYP-RICO	Build Code <b>L380128-</b>								qty
			Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Diffuser	
		<b>26.4</b> 26.4W	<b>2819</b> 2819lm <b>3007</b> 3007lm <b>3069</b> 3069lm <b>3132</b> 3132lm	<b>80</b>	<b>DN</b> Non-Dim <b>DV</b> 0-10V	<b>27K</b> 2700K <b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K	<b>RC</b> Rico Cover		

HYP-RICO	Build Code <b>L38920-</b>								qty
			Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Diffuser	
		<b>33</b> 33.0W	<b>3524</b> 3524lm <b>3758</b> 3758lm <b>3837</b> 3837lm <b>3915</b> 3915lm	<b>80</b>	<b>DN</b> Non-Dim <b>DV</b> 0-10V	<b>27K</b> 2700K <b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K	<b>RC</b> Rico Cover		

CENTRIQ 30	Build Code <b>L38897-</b>								qty	
					Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Finish
		<b>4</b> 4.4W	<b>258</b> 258lm <b>270</b> 270lm <b>288</b> 288lm <b>294</b> 294lm	<b>90</b>	<b>DN</b> Non-Dim <b>DV</b> 0-10V	<b>27K</b> 2700K <b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K	◆ <b>01-29</b> ▲ <b>01-29</b> ● <b>01-29</b>	⊕ <b>24°</b> ⊕ <b>32°</b>		




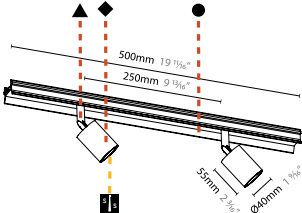

CENTRIQ 40 SUPER SPOT	Build Code <b>L38898-</b>								qty	
					Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Finish
		<b>6</b> 6.4W	<b>350</b> 350lm <b>378</b> 378lm <b>394</b> 394lm <b>402</b> 402lm	<b>90</b>	<b>DN</b> Non-Dim <b>DV</b> 0-10V	<b>27K</b> 2700K <b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K	◆ <b>01-29</b> ▲ <b>01-29</b> ● <b>01-29</b>	⊕ <b>10°</b>		




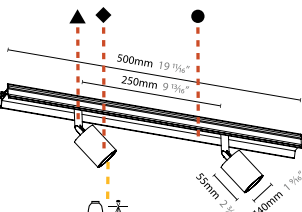










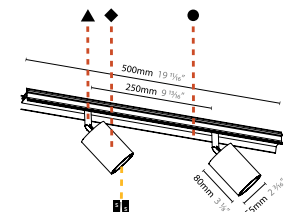






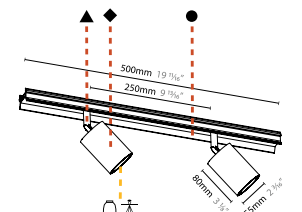






## HYPRO 40 RECESSED SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

CENTRIQ 40 DOUBLE SUPER SPOT	Build Code <b>L38903-</b>		qty						
			Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Finish	Super Spot
 			<b>12.9</b> 12.9W	<b>701</b> 701lm	<b>90</b>	<b>DN</b> Non-Dim <b>DV</b> 0-10V	<b>27K</b> 2700K <b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K	<b>◆ 01-29</b>  <b>▲ 01-29</b>  <b>● 01-29</b>	<b>10</b>  10°
			<b>12</b> 12.8W	<b>756</b> 756lm					
			<b>12</b> 12.8W	<b>788</b> 788lm					
			<b>12</b> 12.8W	<b>804</b> 804lm					
			<b>12</b> 12.8W	<b>804</b> 804lm					

CENTRIQ 40 DOUBLE	Build Code <b>L38904-</b>		qty						
			Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Finish	Beam Angle
 			<b>13</b> 13.0W	<b>936</b> 936lm	<b>90</b>	<b>DN</b> Non-Dim <b>DV</b> 0-10V	<b>27K</b> 2700K <b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K	<b>◆ 01-29</b>  <b>▲ 01-29</b>  <b>● 01-29</b>	<b>20</b>  20° <b>31</b>  31° <b>36</b>  36° <b>40</b>  40° <b>50</b>  50°
			<b>980</b> 980lm						
			<b>1019</b> 1019lm						
			<b>1040</b> 1040lm						
			<b>1040</b> 1040lm						

CENTRIQ 55 DOUBLE SUPER SPOT	Build Code <b>L38905-</b>		qty						
			Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Finish	Super Spot
 			<b>18</b> 18.3W	<b>972</b> 972lm	<b>90</b>	<b>DN</b> Non-Dim <b>DV</b> 0-10V	<b>27K</b> 2700K <b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K	<b>◆ 01-29</b>  <b>▲ 01-29</b>  <b>● 01-29</b>	<b>9</b>  9°
			<b>1048</b> 1048lm						
			<b>1074</b> 1074lm						
			<b>1096</b> 1096lm						
			<b>1096</b> 1096lm						








CENTRIQ 55 DOUBLE	Build Code <b>L38906-</b>		qty						
			Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Finish	Beam Angle
 			<b>24</b> 24.0W	<b>1440</b> 1440lm	<b>90</b>	<b>DN</b> Non-Dim <b>DV</b> 0-10V	<b>27K</b> 2700K <b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K	<b>◆ 01-29</b>  <b>▲ 01-29</b>  <b>● 01-29</b>	<b>15</b>  15° <b>17</b>  17° <b>25</b>  25° <b>33</b>  33° <b>35</b>  35° <b>46</b>  46°
			<b>1520</b> 1520lm						
			<b>1607</b> 1607lm						
			<b>1640</b> 1640lm						
			<b>1640</b> 1640lm						

## HYPRO 40 RECESSED SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

Build Code **L38909-**

qty

MAGIQ 4+4	 	<b>BLACK</b>  	Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Reflector	
			  	<b>26</b> 26.6W	<b>1526</b> 1526lm <b>1654</b> 1654lm <b>1683</b> 1683lm <b>1717</b> 1717lm	<b>90</b>	<b>DN</b> Non-Dim <b>DV</b> 0-10V	<b>27K</b> 2700K <b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K	<b>10</b> Δ 10° <b>20</b> Δ 20° <b>40</b> Δ 40°

DV (0-10V Dimming) is the longer insert

## HYPRO 40 RECESSED SYSTEM SPECIFICATION SHEET

Build Code <b>L38910-</b>										qty
MAGIQ 4+4 KORONA		Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Finish	Reflector		
		26	1565	90	DN	27K	◆ 01-29	10		
		26.6W	1565lm		Non-Dim	2700K		△ 10°		
			1696		DV	30K		△ 20°		
	1725		0-10V	3000K		40				
	1725lm			35K		△ 40°				
	1760			40K						
	1760lm			4000K						

DV (0-10V Dimming) is the longer insert

Build Code <b>L380125-</b>										qty
MAGIQ 4+4 MICRO-DOT		Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Lens			
		26	1280	90	DN	27K	21			
		26.6W	1280lm		Non-Dim	2700K	21°			
			1384		DV	30K	38			
	1411		0-10V	3000K	38°					
	1411lm			35K						
	1440			40K						
	1440lm			4000K						

DV (0-10V Dimming) is the longer insert  
 \*FLFO lens is an anti-glare solution (micro-dot)

Build Code <b>L38911-</b>										qty
MAGIQ 8		Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Reflector			
		26	1526	90	DN	27K	10			
		26.6W	1526lm		Non-Dim	2700K	△ 10°			
			1654		DV	30K	20			
	1683		0-10V	3000K	40					
	1683lm			35K	△ 40°					
	1717			40K						
	1717lm			4000K						







DV (0-10V Dimming) is the longer insert






Build Code <b>L38912-</b>										qty
MAGIQ 8 KORONA		Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Finish	Reflector		
		26	1565	90	DN	27K	◆ 01-29	10		
		26.6W	1565lm		Non-Dim	2700K		△ 10°		
			1696		DV	30K		△ 20°		
	1725		0-10V	3000K		40				
	1725lm			35K		△ 40°				
	1760			40K						
	1760lm			4000K						





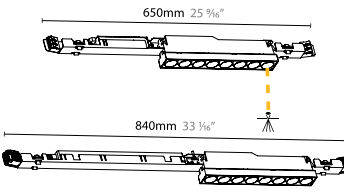
DV (0-10V Dimming) is the longer insert



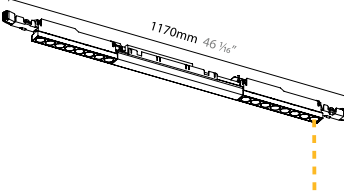



## HYPRO 40 RECESSED SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

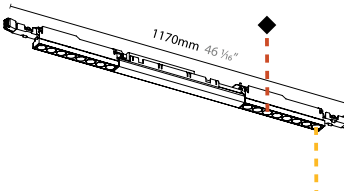MAGIQ 8 MICRO-DOT	Build Code <b>L380126-</b>								qty
	 	BLACK 	Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Lens	
  <p>DV (0-10V Dimming) is the longer insert   LFO lens is an anti-glare solution (micro-dot)</p>			<b>26</b> 26.6W	<b>1280</b> 1280lm	<b>90</b>	<b>DN</b> Non-Dim <b>DV</b> 0-10V	<b>27K</b> 2700K <b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K	<b>21</b> 21°	
				<b>1384</b> 1384lm				<b>38</b> 38°	
				<b>1411</b> 1411lm					
				<b>1440</b> 1440lm					

MAGIQ 8+8	Build Code <b>L38913-</b>								qty
	 	BLACK 	Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Reflector	
 			<b>53</b> 53.1W	<b>3053</b> 3053lm	<b>90</b>	<b>DN</b> Non-Dim <b>DV</b> 0-10V	<b>27K</b> 2700K <b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K	<b>10</b> △ 10°	
				<b>3308</b> 3308lm				<b>20</b> △ 20°	
				<b>3365</b> 3365lm				<b>40</b> △ 40°	
				<b>3434</b> 3434lm					

MAGIQ 8+8 KORONA	Build Code <b>L38914-</b>								qty
	 	BLACK 	Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Finish	Reflector
 			<b>53</b> 53.1W	<b>3053</b> 3053lm	<b>90</b>	<b>DN</b> Non-Dim <b>DV</b> 0-10V	<b>27K</b> 2700K <b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K	<b>01-29</b>	<b>10</b> △ 10°
				<b>3308</b> 3308lm				<b>20</b> △ 20°	
				<b>3365</b> 3365lm				<b>40</b> △ 40°	
				<b>3434</b> 3434lm					

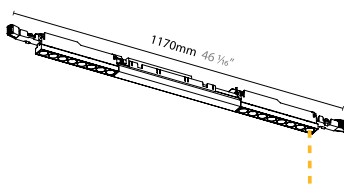MAGIQ 8+8 MICRO-DOT	Build Code <b>L380127-</b>								qty
	 	BLACK 	Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Lens	
  <p> LFO lens is an anti-glare solution (micro-dot)</p>			<b>26</b> 26.6W	<b>1565</b> 1565lm	<b>90</b>	<b>DN</b> Non-Dim <b>DV</b> 0-10V	<b>27K</b> 2700K <b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K	<b>21</b> 21°	
				<b>1696</b> 1696lm				<b>38</b> 38°	
				<b>1725</b> 1725lm					
				<b>1760</b> 1760lm					


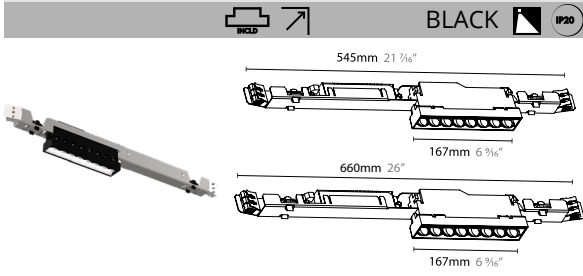
## HYPRO 40 RECESSED SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

Build Code **L38915-**

qty


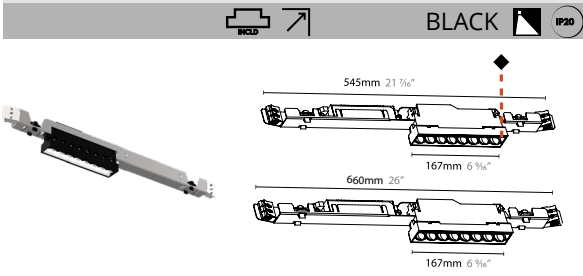

MAGIQ HOLLOW WALLWASH

BLACK 		Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	
 <p>DV (0-10V Dimming) is the longer insert</p>	<b>19</b>	<b>1113</b>	<b>90</b>	<b>DN</b> Non-Dim <b>DV</b> 0-10V	<b>27K</b> 2700K <b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K		
	19.0W	1113lm					
		1177					
		1411					
	<b>1346</b>	<b>1346lm</b>					

Build Code **L38916-**

qty


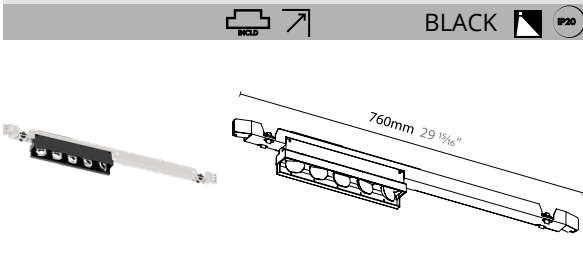
MAGIQ HOLLOW WALLWASH  
KORONA

BLACK 		Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Finish
 <p>DV (0-10V Dimming) is the longer insert</p>	<b>19</b>	<b>1113</b>	<b>90</b>	<b>DN</b> Non-Dim <b>DV</b> 0-10V	<b>27K</b> 2700K <b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K	 <b>01-29</b>	
	19.0W	1113lm					
		1177					
		1411					
	<b>1346</b>	<b>1346lm</b>					

Build Code **L38917-**

qty


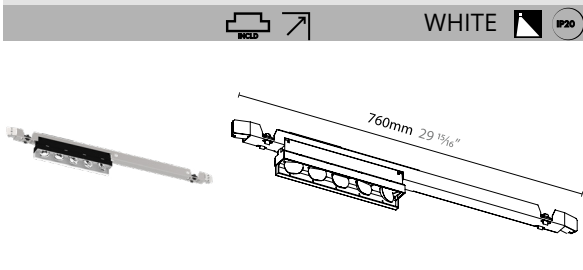
MAGIQ WALLWASH

BLACK 		Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	
	<b>31</b>	<b>2303</b>	<b>90</b>	<b>DN</b> Non-Dim <b>DV</b> 0-10V	<b>27K</b> 2700K <b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K		
	31.4W	2303lm					
		<b>2522</b>					
		2522lm					
		<b>2651</b>				<b>2651lm</b>	

Build Code **L38918-**

qty

MAGIQ WALLWASH

WHITE 		Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	
	<b>31</b>	<b>2303</b>	<b>90</b>	<b>DN</b> Non-Dim <b>DV</b> 0-10V	<b>27K</b> 2700K <b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K		
	31.4W	2303lm					
		<b>2522</b>					
		2522lm					
		<b>2651</b>				<b>2651lm</b>	

PROJECT \_\_\_\_\_  
 TYPE \_\_\_\_\_  
 NOTES \_\_\_\_\_  
 QUANTITY \_\_\_\_\_  
 DATE \_\_\_\_\_

### FINISH COLORS 01-29

Sparkling Silver - 01




Black Velvet - 02



Crystal White - 03



Creamy - 04



Hampton Bay - 05




Lagoon - 06



Urban Forest - 07



In the Army - 08



Rusty Angel - 09




Rusty Rush - 10



Milk and Chocolate - 11



Fade to Gray - 12



Mysterious Gray - 13



Twilight - 14



Lost Dream - 15



Purple Sky - 16



Fresh Oh - 17



Funky P. - 18



Kissing Aphrodite - 19




Poseidon's Paradise - 20




Blue Sky - 21



Spring Green - 22



Mellow Yellow - 23



Golden Heart - 24



Gun Metal - 25



Champagne Cream - 26



Copper Mine - 27



Ancient Bronze - 28



Jazz Gold - 29



**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

**Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.






































































**Gun Metal:** No Gun Metal finish is alike. It combines a mixture of transparent and black color particles which ensures a highly individual effect and no luminaire being identical.

**Champagne Cream, Copper Mine, Ancient Bronze + Jazz Gold:** These finishes have slight fading from specific powder coating production. Each luminaire will slightly vary.











RAL Color Upon Request













### LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimnable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

### IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

### IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

PROJECT
TYPE
NOTES
QUANTITY
DATE

### SYSTEM SUMMARY

#### System

**Type**  
Recessed (Non-IC type)  
Rated for Dry Locations Ceiling and Wall Mounted

**Approval Status**  
CSA Certified to CSA and UL Standards

**Emission**  
Refer to emission icon beside each light insert and symbol legend for descriptions

**Efficiency**  
Acrylic opal diffuser (snap-in) lens 43%  
Micro-prismatic diffuser (snap-in) lens 53%  
Rico-cover diffuser (snap-in) lens

#### Profile

**Measurement**  
w 50mm (1 15/16") x ht. 76mm (3")

**Housing**  
Anodized extruded aluminum profile available per meter and field-cuttable  
Profiles have a maximum length of 3000mm (9' 10 15/16") and joined together with couplers to ensure uniform appearance and easy installation

**Cutout**  
w 43mm (1 11/16") ± 1mm x Profile Length + 30mm (1 3/16")  
**Drywall Ceiling Thickness**  
Installation clips function with drywall thickness between 10mm (3/8") - 25mm (1 1/4")  
**Recessed Depth**  
h 100mm (3 15/16")

#### Electrical

**Connections**  
Luminaries are pre-wired with a factory installed branch circuit wiring and quick-release connectors  
Through wiring is used to connect the luminaries

**Power Feed**  
Located 2 inches from one end of the fixture, on top of the profile  
If a different location is required, please specify  
3 Wires - non-dimming or phase dimming  
4 Wires - two circuits of non-dimming or phase dimming  
5 Wires - 0-10V dimming or dali dimming

**LED Driver**  
Integrated with inserts  
Electronic Class 2 driver, Universal 120V/277V  
Non Dimming Driver, Dimming Driver 0-10V (10-100%)  
Consult factory for driver cutsheet  
If a different driver is required, please specify

**Emergency Inverter Compatible**  
To be installed remotely, and provided by others  
It can be located up to 250m away from the fixture

Emergency circuit wiring is available upon request (Isolated track with dedicated driver used for emergency circuit will connect to emergency battery pack - supplied by others)

#### General

**Features**  
Korona Cone is a glare-reduction cone that sits in front of the reflector - available in 29 standard colors, thus creating a special decorative effect

LFO lenses ensure a glare free downlight without illuminating the luminaries housing and the lowest UGR ratings perfect for residential and hospitality applications

Rico lines use special micro reflectors that improve efficiency and achieve extremely low UGR values (some cases less than 0)


Aura fixtures have clearly defined openings in the back to create a subtle glow

**Custom Requests and Additional Options**  
Availability depends by insert, system, and configuration  
Must consult factory and allow up to 5 business days for an answer

Special beam angles, special LEDs, CRI 90, RGB-W, tunable, light inserts with different outputs, light inserts on different circuits

Special LEDs optimize luminaries to meet different applications  
Gold+ invokes a heavy golden tone intended for bread and pastries  
Meat+ displays saturated red light (white parts of product will appear slightly red)  
Art+ highlights pieces of art without adversely affecting the perception of individual colors  
Fashion+ has the entire color spectrum brilliantly orchestrated without distorting the color temperature

**Configuration**  
Consult factory for patterns or custom designs  
Provide configuration drawings

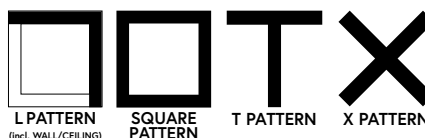

\*Shop drawings provided upon receiving purchase order

#### Warranty

ZANEEN provides a limited warranty from date of purchase to original purchaser

**LED Inserts** : 5 year tested for 50,000 hours at 70% lumen output (L70)  
**LED Driver** : 5 year  
**Non-Electrical Components** : 1 year

\*Check boxes to complete specification order and submit to [quotes@zaneen.com](mailto:quotes@zaneen.com) to receive a formal BOM and a finalized model number

\*In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at [zaneen.com](http://zaneen.com)



PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

### SYSTEM SUMMARY

#### Inserts

\*Delivered lumens is the maximum possible; using widest lens, optic, or reflector

#### Linears

##### Hypline

Wattage: 16.5W - 33.0W  
Lumen: 1595lm - 3545lm  
Color Temperature: 27K, 30K, 35K, 40K  
Length: 705mm (27 3/4") - 1408mm (55 7/16")

##### Hyp-Rico

Wattage: 16.5W - 33.0W  
Lumen: 1762lm - 3915lm  
Color Temperature: 27K, 30K, 35K, 40K  
Length: 705mm (27 3/4") - 1408mm (55 7/16")

#### Spots

##### Centriq Spots

Wattage: 4.4W - 12.0W  
Lumen: 258lm - 820lm  
Color Temperature: 27K, 30K, 35K, 40K  
Lens Option: 24°, 32°  
Super Spot Option: 9°, 10°  
Reflector/Lens Option: 20°, 31°, 36°, 40°, 50° / 15°, 17°, 25°, 33°, 35°, 46°  
Available in 29 colors

##### Centriq / Centriq Double Spots

Wattage: 8.7W - 24.0W  
Lumen: 517lm - 1640lm  
Color Temperature: 27K, 30K, 35K, 40K  
Lens Option: 24°, 32°  
Super Spot Option: 9°, 10°  
Reflector/Lens Option: 20°, 31°, 36°, 40°, 50° / 15°, 17°, 25°, 33°, 35°, 46°  
Available in 29 colors

#### Downlights

##### Magiq 4+4 Downlights

Wattage: 26.6W  
Lumen: 1280lm - 1760lm  
Color Temperature: 27K, 30K, 35K, 40K  
Lens Option: 21°, 38°  
Reflector Option: 10°, 20°, 40°  
Korona Available in 29 colors

##### Magiq 8 Downlights

Wattage: 26.6W  
Lumen: 1280lm - 1760lm  
Color Temperature: 27K, 30K, 35K, 40K  
Lens Option: 21°, 38°  
Reflector Option: 10°, 20°, 40°  
Korona Available in 29 colors

##### Magiq 8+8 Downlights

Wattage: 53.1W  
Lumen: 2560lm - 3434lm  
Color Temperature: 27K, 30K, 35K, 40K  
Lens Option: 21°, 38°  
Reflector Option: 10°, 20°, 40°  
Korona Available in 29 colors

#### Wallwasher

##### Magiq Hollow Wallwash

Wattage: 19.0W  
Lumen: 1113lm - 1346lm  
Color Temperature: 27K, 30K, 35K, 40K  
Korona Available in 29 colors

##### Magiq Wallwash

Wattage: 31.4W  
Lumen: 2303lm - 2651lm  
Color Temperature: 27K, 30K, 35K, 40K  
Available in Black and White

#### Panels

##### Hadi

TBD

# WIRING DIAGRAMS


ALL ZANEEN FIXTURES ARE MANUFACTURED TO NORTH AMERICAN ELECTRICAL STANDARDS

Post Sales Support  
HQ 1-800-388-3382 X 625 support@zaneen.com


### IMPORTANT:

- Do NOT connect directly to line voltage
- There is a minimum and maximum load per driver (See fixture and driver specifications).
- Fixture MUST be connected to LED driver, prior to turning power on

### PHASE/NON-DIMMING WIRING DIAGRAM

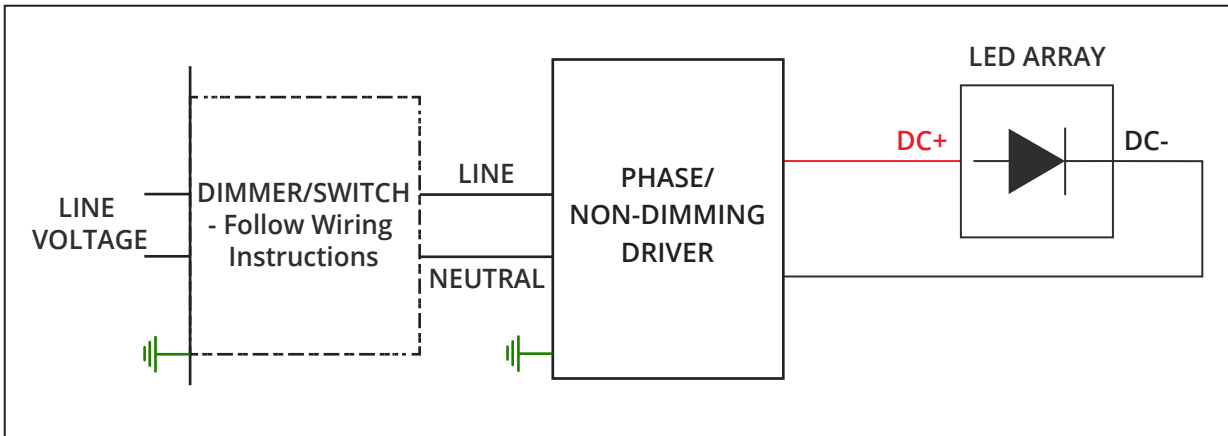

### 0-10V DIMMING WIRING DIAGRAM

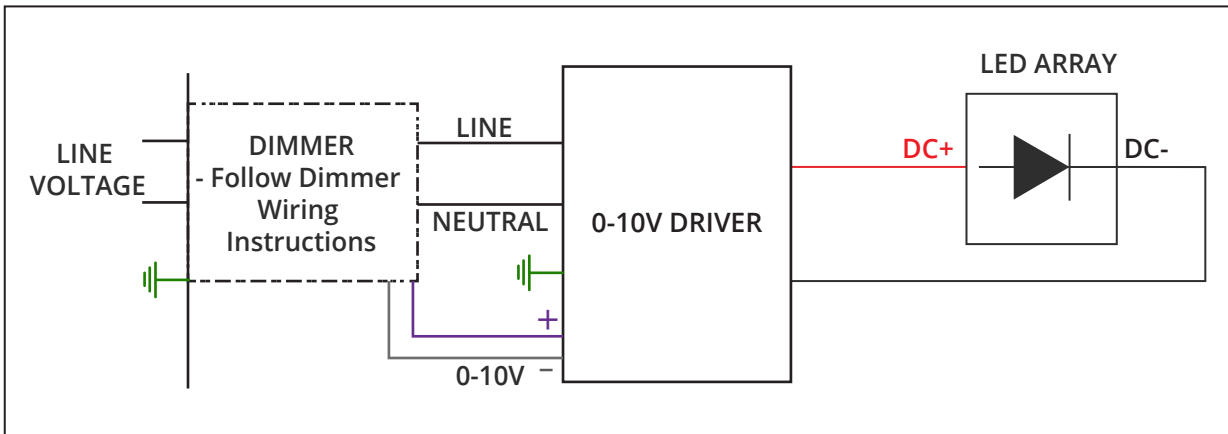

## **HYPRO 40** RECESSED SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERT CUSTOM DRAWING HERE OR ATTACH WITH ADDITIONAL PAGES