

PROJECT _____

TYPE _____

NOTES _____



QUANTITY _____

DATE _____

HYPRO 40 SUSPENSION SYSTEM SPECIFICATION SHEET

ARCHITECTURAL

The HYPRO 40 profile system stands for minimalist lighting structures that can be configured individually. The suspended profile with 120V plug system can be used for general as well as accent lighting. Thanks to a variety of connectors and nodes, floating lines of light can be drawn in the room and designed in 29 standard colors. The system can be specified as a complete glare-free solution. Special micro reflectors inside the Rico Line improve efficiency and achieve extremely low UGR values, sometimes less than 0

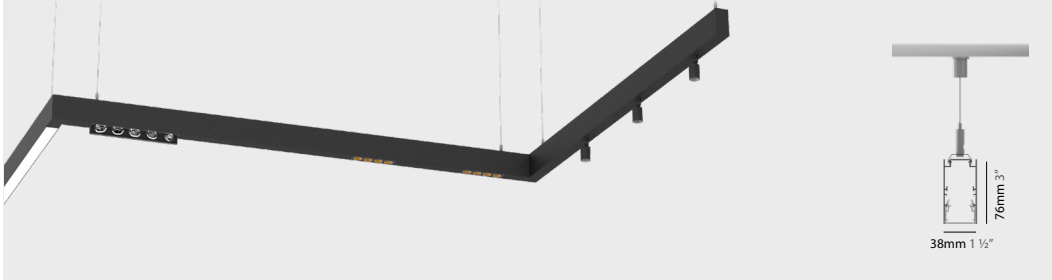

A slightly deeper aluminum KORONA cover, available in the 29 colors, creates a great focal point and compliments way-finding and branding colors. This compliments the korona colors used with the magiq 4 + 8 and magiq hol-low wallwash

PROLICHT

UPON REQUEST

- Additional Options**
- Color Temperature
 - Special Beam Angle
 - Special LED
 - CRI 90
 - RGB-W / Tunable
 - Different Output



Configuration Drawing is Required



BUILDING GUIDE

Check boxes to complete specification order and submit to quotes@zaneen.com to receive a formal BOM and finalized model number. For specification purposes, build a unique model number with bold text [30K - DIR - OP - ...]

Quick Ship (QS) - Not Available

Build Code **L3HY40-SUS-SYS-**

Product	Color Temperature	Distribution	Diffuser	Cable	Length	
L3HY40-SUS-SYS Suspension	27K 2700K	DIR Direct	OP Opal	2M 2000mm	Alum Profile System length	
	30K 3000K		MP Microprism	6M 6000mm		Specify in mm length
	35K 3500K		RC Rico Cover	XM Custom (Upon Request)	Specify in 'X'-X"	qty
	40K 4000K					PAT Pattern/Design Ambition (Consult Factory with Drawings)

PROFILE - SYSTEM

Electrical	Input Voltage	Emergency	Finish		
DN Non-Dimming	UNV Universal 120V / 277V	EMCIR Emergency Circuit	Profile ◆ 01-29	X-Connector ◆ 01-29	Korona Profile ◆ 01-29
DV 0-10 Dimming			End Cap ◆ 01-29	Wall/Ceiling Cntr. ◆ 01-29	Korona End Plate ◆ 01-29
			L-Connector ◆ 01-29	Installation Clip ◆ 01-29	
			T-Connector ◆ 01-29	Power Feed ◆ 01-29	

PROFILE - SYSTEM

◆ ◆ ◆ ◆
refer to color chart
refer to inserts to build code
RAL color # (upon request)











HYPRO 40 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____




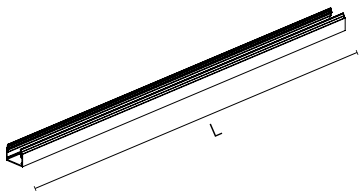

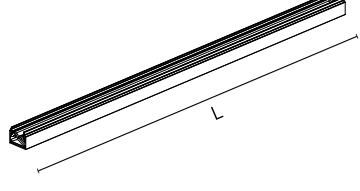

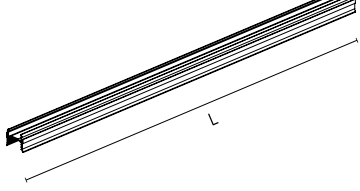

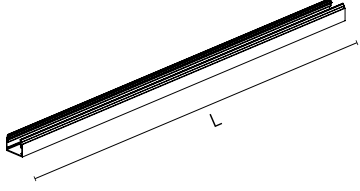
Build Code L300095-		Dimension		Finish	qty
mm		mm			
ALUMINUM PROFILE		W: 38 H: 76	per meter max 3000mm field-cuttable	◆ 01-29	
Build Code L38937-		Dimension		Finish	qty
mm		mm			
END CAP		12 x 38 H: 76		◆ 01-29	
Build Code L38870		Dimension			qty
mm		mm			
LINEAR COUPLER		150 x 35 H: 33			
Build Code L38939-		Dimension		Finish	qty
mm		mm			
L-CONNECTOR		70 x 70 H: 76		◆ 01-29	
Build Code L38940-		Dimension		Finish	qty
mm		mm			
T-CONNECTOR		100 x 70 H: 76		◆ 01-29	

HYPRO 40 SUSPENSION SYSTEM SPECIFICATION SHEET

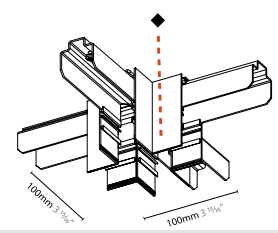PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

Build Code L38941-		Dimension		Finish	qty			
mm		mm						
X-CONNECTOR			100 x 100	◆ 01-29				
	H: 76							
Build Code L38942-		Dimension		Finish	qty			
mm		mm						
WALL/CEILING CONNECTOR			210 x 39	◆ 01-29				
	H: 210							
Build Code L389 _ _ -		Dimension		Build Code Addition	Finish	Suspension		
mm		mm						
INSTALLATION CLIP			30 x 30	◆ 01-29	9 6 7	200		
			L: 2000			↓ 2000mm		
			30 x 30			9 5 3	600	
L: 6000		↓ 6000mm						
						XM		
						↓ Custom		
Build Code L3901 _ -		Dimension		Build Code Addition	Finish	Suspension		
mm		mm	mm ²					
POWER FEED			Ø114 H: 32	◆ 01-29	1 3	200		
			L: 2000			↓ 2000mm		
						3 x 0.75	1 4	
						5 x 0.75	1 5	
						4 x 0.75	1 6	600
						Ø114 H: 32	3 x 0.75	↓ 6000mm
	L: 6000	5 x 0.75						
		4 x 0.75	1 8			XM		
						↓ Custom		
Build Code L38876		Dimension		qty				
mm		mm						
CENTRAL FEED			31 x 27					
	H: 45							

HYPRO 40 SUSPENSION SYSTEM SPECIFICATION SHEET

Build Code L38877		Dimension		qty	
mm					
CABLE HOLDER			25 x 36 H: 22		
Build Code L38 _ _ _ _ -		Dimension		Build Code Addition	qty
mm					
OPAL DIFFUSER			W: 35 H:28	per meter	8 0 1 1 4
			L: 705	max 3000mm field-cutttable	8 8 8 0
			L: 1128		8 0 1 1 5
			L: 1408		8 8 8 1
			L: 2113		8 8 8 2
			L: 2815		8 8 8 3
Build Code L38 _ _ _ _ -		Dimension		Build Code Addition	qty
mm					
MICROPRISM DIFFUSER			W: 35 H:28	per meter	8 0 1 1 6
			L: 705	max 3000mm field-cutttable	8 8 8 4
			L: 1128		8 0 1 1 7
			L: 1408		8 8 8 5
			L: 2113		8 8 8 6
			L: 2815		8 8 8 7
Build Code L38 _ _ _ _ -		Dimension		Build Code Addition	qty
mm					
RICO COVER			W: 35 H:29	per meter	8 0 1 1 8
			L: 705	max 3000mm field-cutttable	8 8 8 8
			L: 1128		8 0 1 1 9
			L: 1408		8 8 8 9
			L: 1833		8 0 1 2 0
			L: 2113		8 8 9 0
			L: 2256		8 0 1 2 1
			L: 2536		8 0 1 2 2
L: 2815	8 8 9 1				
Build Code L3889 _ -		Dimension		Build Code Addition	qty
mm					
COVER BLACK			1000 x 35	field-cutttable	9 2
			H: 28		9 3
			2000 x 35		9 4
			H: 28		
			3000 x 35		
			H: 28		

HYPRO 40 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT _____

TYPE _____


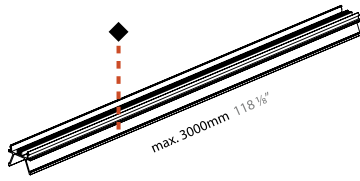
NOTES _____

QUANTITY _____

DATE _____



Build Code **L38895-** qty

KORONA PROFILE

		mm	Dimension	Finish
 				
		x 35 H: 27	per meter max 3000mm field-cutttable	◆ 01-29


Build Code **L38896-** qty


END PLATE KORONA


		mm	Dimension	Finish
 				
		1 x 35 H: 28	1 Pair	◆ 01-29


HYPRO 40 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

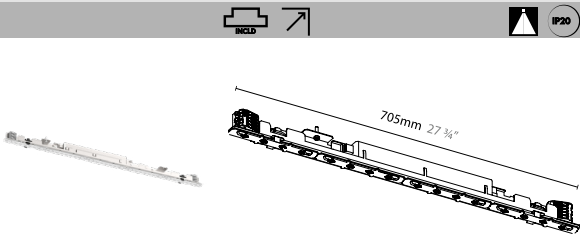Build Code L38878-									qty
HYPLINE 40		Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Diffuser		
		16 16.5W 1595 1595lm 1702 1702lm 1737 1737lm 1772 1772lm	80	DN Non-Dim DV 0-10V	27K 2700K 30K 3000K 35K 3500K 40K 4000K	OP Opal MP Microprism			

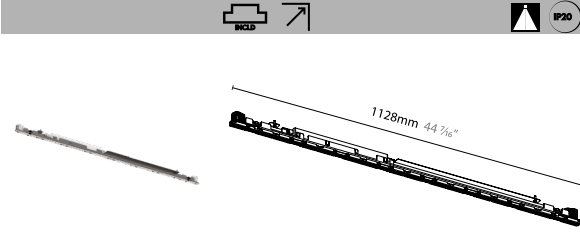

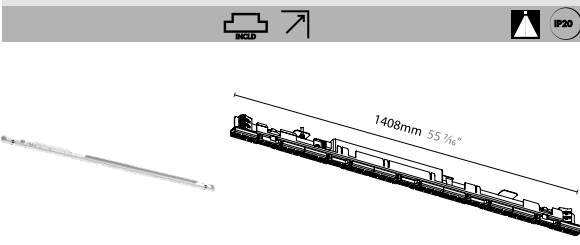
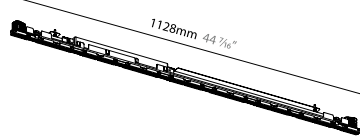
Build Code L380123-									qty
HYPLINE 40		Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Diffuser		
		26.4 26.4W 2552 2552lm 2723 2723lm 2779 2779lm 2836 2836lm	80	DN Non-Dim DV 0-10V	27K 2700K 30K 3000K 35K 3500K 40K 4000K	OP Opal MP Microprism			

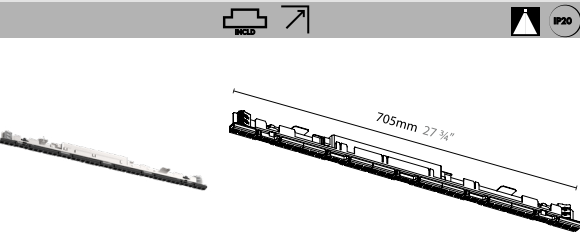


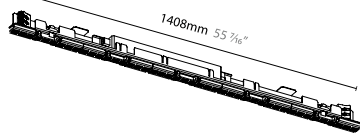
Build Code L38879-									qty
HYPLINE 40		Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Diffuser		
		33 33.0W 3190 3190lm 3403 3403lm 3474 3474lm 3545 3545lm	80	DN Non-Dim DV 0-10V	27K 2700K 30K 3000K 35K 3500K 40K 4000K	OP Opal MP Microprism			






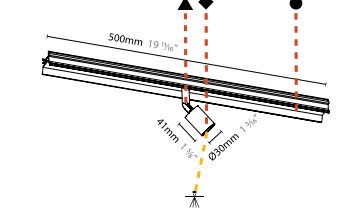
Build Code L38919-									qty
HYP-RICO		Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Diffuser		
		16 16.5W 1762 1762lm 1879 1879lm 1919 1919lm 1958 1958lm	80	DN Non-Dim DV 0-10V	27K 2700K 30K 3000K 35K 3500K 40K 4000K	RC Rico Cover			






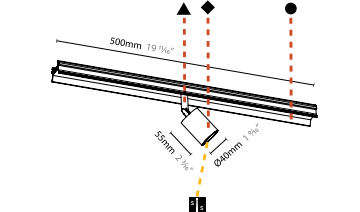
HYPRO 40 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

HYP-RICO	Build Code L380128-								qty
			Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Diffuser	
			26.4 26.4W	2819 2819lm 3007 3007lm 3069 3069lm 3132 3132lm	80	DN Non-Dim DV 0-10V	27K 2700K 30K 3000K 35K 3500K 40K 4000K	RC Rico Cover	




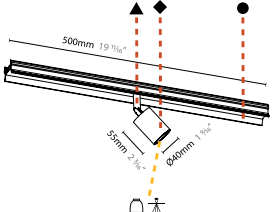
HYP-RICO	Build Code L38920-								qty
			Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Diffuser	
			33 33.0W	3524 3524lm 3758 3758lm 3837 3837lm 3915 3915lm	80	DN Non-Dim DV 0-10V	27K 2700K 30K 3000K 35K 3500K 40K 4000K	RC Rico Cover	




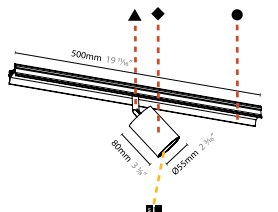
CENTRIQ 30	Build Code L38897-								qty	
					Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Finish
			4 4.4W	258 258lm 270 270lm 288 288lm 294 294lm	90	DN Non-Dim DV 0-10V	27K 2700K 30K 3000K 35K 3500K 40K 4000K	◆ 01-29 ▲ 01-29 ● 01-29		⊕ 24° ⊕ 32°




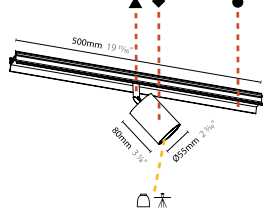
CENTRIQ 40 SUPER SPOT	Build Code L38898-								qty	
					Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Finish
			6 6.4W	350 350lm 378 378lm 394 394lm 402 402lm	90	DN Non-Dim DV 0-10V	27K 2700K 30K 3000K 35K 3500K 40K 4000K	◆ 01-29 ▲ 01-29 ● 01-29		⊕ 10°




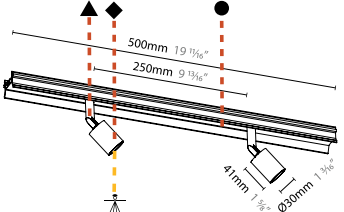
HYPRO 40 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

CENTRIQ 40	Build Code L38899-		qty						
			Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Finish	Beam Angle
 			6 6.5W	468 468lm	90	DN Non-Dim	27K 2700K	◆ 01-29	20 △ 20°
				490 490lm		DV 0-10V	30K 3000K	▲ 01-29	31 △ 31°
				510 510lm			35K 3500K	● 01-29	36 △ 36°
				520 520lm			40K 4000K		40 △ 40°
									50 △ 50°





CENTRIQ 55 SUPER SPOT	Build Code L38900-		qty						
			Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Finish	Super Spot
 			9 9.2W	486 486lm	90	DN Non-Dim	27K 2700K	◆ 01-29	9 ■ 9°
				524 524lm		DV 0-10V	30K 3000K	▲ 01-29	
				537 537lm			35K 3500K	● 01-29	
				548 548lm			40K 4000K		









CENTRIQ 55	Build Code L38901-		qty						
			Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Finish	Beam Angle
 			12 12.0W	720 720lm	90	DN Non-Dim	27K 2700K	◆ 01-29	15 △ 15°
				760 760lm		DV 0-10V	30K 3000K	▲ 01-29	17 △ 17°
				804 804lm			35K 3500K	● 01-29	25 △ 25°
				820 820lm			40K 4000K		33 △ 33°
									35 △ 35°
									46 △ 46°
									46 △ 46°





CENTRIQ 30 DOUBLE	Build Code L38902-		qty						
			Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Finish	Lens
 			8.8 8.8W	517 517lm	90	DN Non-Dim	27K 2700K	◆ 01-29	24 △ 24°
				541 541lm		DV 0-10V	30K 3000K	▲ 01-29	32 △ 32°
				576 576lm			35K 3500K	● 01-29	32 △ 32°
				588 588lm			40K 4000K		

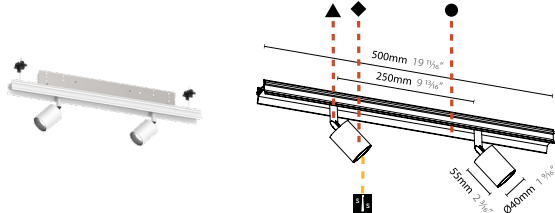








HYPRO 40 SUSPENSION SYSTEM SPECIFICATION SHEET

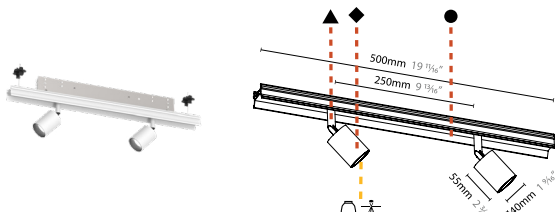PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

CENTRIO 40 DOUBLE SUPER SPOT	Build Code L38903-									qty
			Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Finish	Super Spot	
			12.9 12.9W	701 701lm	90	DN Non-Dim DV 0-10V	27K 2700K 30K 3000K 35K 3500K 40K 4000K	◆ 01-29 ▲ 01-29 ● 01-29	10  10°	
			12 12.8W	756 756lm						
			12 12.8W	788 788lm						
			12 12.8W	804 804lm						
			12 12.8W	804 804lm						

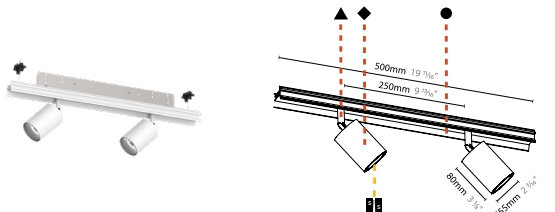CENTRIO 40 DOUBLE	Build Code L38904-									qty
			Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Finish	Beam Angle	
			13 13.0W	936 936lm	90	DN Non-Dim DV 0-10V	27K 2700K 30K 3000K 35K 3500K 40K 4000K	◆ 01-29 ▲ 01-29 ● 01-29	20  20° 31  31° 36  36° 40  40° 50  50°	
			980 980lm							
			1019 1019lm							
			1040 1040lm							
			1040 1040lm							

CENTRIO 55 DOUBLE SUPER SPOT	Build Code L38905-									qty
			Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Finish	Super Spot	
			18 18.3W	972 972lm	90	DN Non-Dim DV 0-10V	27K 2700K 30K 3000K 35K 3500K 40K 4000K	◆ 01-29 ▲ 01-29 ● 01-29	9  9°	
			1048 1048lm							
			1074 1074lm							
			1096 1096lm							
			1096 1096lm							

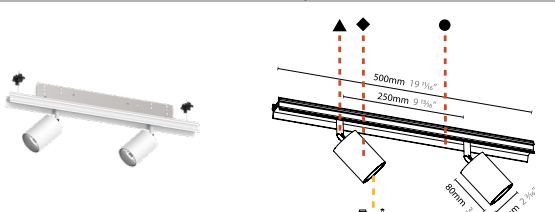






CENTRIO 55 DOUBLE	Build Code L38906-									qty
			Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Finish	Beam Angle	
			24 24.0W	1440 1440lm	90	DN Non-Dim DV 0-10V	27K 2700K 30K 3000K 35K 3500K 40K 4000K	◆ 01-29 ▲ 01-29 ● 01-29	15  15° 17  17° 25  25° 33  33° 35  35° 46  46°	
			1520 1520lm							
			1607 1607lm							
			1640 1640lm							
			1640 1640lm							

HYPRO 40 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____





Build Code **L38909-**





qty





MAGIQ 4+4	 	BLACK  	Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Reflector	
			   <small>DV (0-10V Dimming) is the longer insert</small>	26 26.6W	1526 1526lm 1654 1654lm 1683 1683lm 1717 1717lm	90	DN Non-Dim DV 0-10V	27K 2700K 30K 3000K 35K 3500K 40K 4000K	10 Δ 10° 20 Δ 20° 40 Δ 40°





HYPRO 40 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

MAGIQ 4+4 KORONA	Build Code L38910-								qty
	   <p>DV (0-10V Dimming) is the longer insert</p>	BLACK 	Wattage 26 26.6W	Delivered Lumens 1565 1565lm 1696 1696lm 1725 1725lm 1760 1760lm	CRI 90	Dimming DN Non-Dim DV 0-10V	Color Temperature 27K 2700K 30K 3000K 35K 3500K 40K 4000K	Finish ◆ 01-29	Reflector 10 △ 10° 20 △ 20° 40 △ 40°

MAGIQ 4+4 MICRO-DOT	Build Code L380125-								qty
	   <p>DV (0-10V Dimming) is the longer insert LFO lens is an anti-glare solution (micro-dot)</p>	BLACK 	Wattage 26 26.6W	Delivered Lumens 1280 1280lm 1384 1384lm 1411 1411lm 1440 1440lm	CRI 90	Dimming DN Non-Dim DV 0-10V	Color Temperature 27K 2700K 30K 3000K 35K 3500K 40K 4000K	Lens 21 △ 21° 38 △ 38°	

MAGIQ 8	Build Code L38911-								qty
	   <p>DV (0-10V Dimming) is the longer insert</p>	BLACK 	Wattage 26 26.6W	Delivered Lumens 1526 1526lm 1654 1654lm 1683 1683lm 1717 1717lm	CRI 90	Dimming DN Non-Dim DV 0-10V	Color Temperature 27K 2700K 30K 3000K 35K 3500K 40K 4000K	Reflector 10 △ 10° 20 △ 20° 40 △ 40°	

MAGIQ 8 KORONA	Build Code L38912-								qty
	   <p>DV (0-10V Dimming) is the longer insert</p>	BLACK 	Wattage 26 26.6W	Delivered Lumens 1565 1565lm 1696 1696lm 1725 1725lm 1760 1760lm	CRI 90	Dimming DN Non-Dim DV 0-10V	Color Temperature 27K 2700K 30K 3000K 35K 3500K 40K 4000K	Finish ◆ 01-29	Reflector 10 △ 10° 20 △ 20° 40 △ 40°

HYPRO 40 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

MAGIQ 8 MICRO-DOT	Build Code L380126-									qty
		BLACK	Wattage 26 26.6W	Delivered Lumens 1280 1280lm 1384 1384lm 1411 1411lm 1440 1440lm	CRI 90	Dimming DN Non-Dim DV 0-10V	Color Temperature 27K 2700K 30K 3000K 35K 3500K 40K 4000K	Lens 21 21° 38 38°		

DV (0-10V Dimming) is the longer insert
 LFO lens is an anti-glare solution (micro-dot)

MAGIQ 8+8	Build Code L38913-									qty
		BLACK	Wattage 53 53.1W	Delivered Lumens 3053 3053lm 3308 3308lm 3365 3365lm 3434 3434lm	CRI 90	Dimming DN Non-Dim DV 0-10V	Color Temperature 27K 2700K 30K 3000K 35K 3500K 40K 4000K	Reflector 10 Δ 10° 20 Δ 20° 40 Δ 40°		


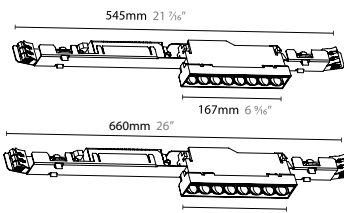

MAGIQ 8+8 KORONA	Build Code L38914-									qty
		BLACK	Wattage 53 53.1W	Delivered Lumens 3053 3053lm 3308 3308lm 3365 3365lm 3434 3434lm	CRI 90	Dimming DN Non-Dim DV 0-10V	Color Temperature 27K 2700K 30K 3000K 35K 3500K 40K 4000K	Finish ◆ 01-29	Reflector 10 Δ 10° 20 Δ 20° 40 Δ 40°	

MAGIQ 8+8 MICRO-DOT	Build Code L380127-									qty
		BLACK	Wattage 26 26.6W	Delivered Lumens 1565 1565lm 1696 1696lm 1725 1725lm 1760 1760lm	CRI 90	Dimming DN Non-Dim DV 0-10V	Color Temperature 27K 2700K 30K 3000K 35K 3500K 40K 4000K	Lens 21 21° 38 38°		


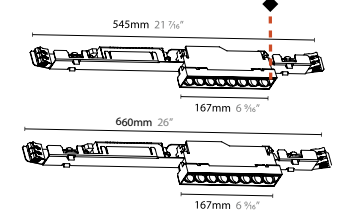


LFO lens is an anti-glare solution (micro-dot)

HYPRO 40 SUSPENSION SYSTEM SPECIFICATION SHEET


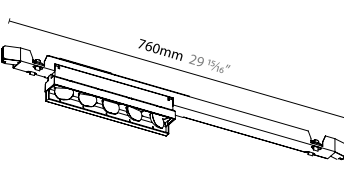

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____


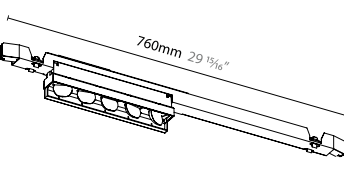

Build Code L38915-								qty
MAGIQ HOLLOW WALLWASH		BLACK	Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	
			19 19.0W	1113 1113lm	90	DN Non-Dim DV 0-10V	27K 2700K 30K 3000K 35K 3500K 40K 4000K	
				1177 1177lm 1411 1411lm 1346 1346lm				

DV (0-10V Dimming) is the longer insert

Build Code L38916-								qty
MAGIQ HOLLOW WALLWASH KORONA		BLACK	Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	Finish
			19 19.0W	1113 1113lm	90	DN Non-Dim DV 0-10V	27K 2700K 30K 3000K 35K 3500K 40K 4000K	 01-29
				1177 1177lm 1411 1411lm 1346 1346lm				

DV (0-10V Dimming) is the longer insert

Build Code L38917-								qty
MAGIQ WALLWASH		BLACK	Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	
			31 31.4W	2303 2303lm	90	DN Non-Dim DV 0-10V	27K 2700K 30K 3000K 35K 3500K 40K 4000K	
				2522 2522lm 2598 2598lm 2651 2651lm				

Build Code L38918-								qty
MAGIQ WALLWASH		WHITE	Wattage	Delivered Lumens	CRI	Dimming	Color Temperature	
			31 31.4W	2303 2303lm	90	DN Non-Dim DV 0-10V	27K 2700K 30K 3000K 35K 3500K 40K 4000K	
				2522 2522lm 2598 2598lm 2651 2651lm				

PROJECT _____
 TYPE _____
 NOTES _____
 QUANTITY _____
 DATE _____

FINISH COLORS 01-29

Sparkling Silver - 01




Black Velvet - 02



Crystal White - 03



Creamy - 04




Hampton Bay - 05




Lagoon - 06



Urban Forest - 07



In the Army - 08



Rusty Angel - 09



Rusty Rush - 10



Milk and Chocolate - 11




Fade to Gray - 12



Mysterious Gray - 13



Twilight - 14




Lost Dream - 15



Purple Sky - 16



Fresh Oh - 17



Funky P. - 18



Kissing Aphrodite - 19



Poseidon's Paradise - 20




Blue Sky - 21



Spring Green - 22



Mellow Yellow - 23



Golden Heart - 24



Gun Metal - 25



Champagne Cream - 26



Copper Mine - 27



Ancient Bronze - 28



Jazz Gold - 29



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.






































































Gun Metal: No Gun Metal finish is alike. It combines a mixture of transparent and black color particles which ensures a highly individual effect and no luminaire being identical.

Champagne Cream, Copper Mine, Ancient Bronze + Jazz Gold: These finishes have slight fading from specific powder coating production. Each luminaire will slightly vary.











RAL Color Upon Request













LEGEND

	floor-mounted		pivotable		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

PROJECT
TYPE
NOTES
QUANTITY
DATE

SYSTEM SUMMARY

System

Type
Suspension
Rated for Dry Locations Ceiling Mounted

Approval Status
CSA Certified to CSA and UL Standards

Emission
Refer to emission icon beside each light insert and symbol legend for descriptions

Efficiency
Acrylic opal diffuser (snap-in) lens 43%
Micro-prismatic diffuser (snap-in) lens 53%
Rico-cover diffuser (snap-in) lens

Profile

Measurement
w 38mm (1 1/2") x ht. 76mm (3")

Housing
Anodized extruded aluminum profile available per meter and field-cuttable
Profiles have a maximum length of 3000mm (9' 10 1/4") and joined together with couplers to ensure uniform appearance and easy installation

Suspension Lengths
Standard lengths include 2000mm and 6000mm
Any custom length must be pre-cut on site
Maximum custom length available is 10000mm

Electrical

Connections
Luminaries are pre-wired with a factory installed branch circuit wiring and quick-release connectors
Through wiring is used to connect the luminaries

Power Feed
Located 2 inches from one end of the fixture, on top of the profile
If a different location is required, please specify
3 Wires - non-dimming or phase dimming
4 Wires - two circuits of non-dimming or phase dimming
5 Wires - 0-10V dimming or dali dimming

LED Driver
Integrated with inserts
Electronic Class 2 driver, Universal 120V/277V
Non Dimming Driver
Dimming Driver 0-10V (10-100%)
Consult factory for driver cutsheet
If a different driver is required, please specify

Emergency Inverter Compatible
To be installed remotely, and provided by others
It can be located up to 250m away from the fixture

Emergency circuit wiring is available upon request (Isolated track with dedicated driver used for emergency circuit will connect to emergency battery pack - supplied by others)

General

Features
Korona Cone is a glare-reduction cone that sits in front of the reflector - available in 29 standard colors, thus creating a special decorative effect

LFO lenses ensure a glare free downlight without illuminating the luminaries housing and the lowest UGR ratings perfect for residential and hospitality applications

Rico lines use special micro reflectors that improve efficiency and achieve extremely low UGR values (some cases less than 0)


Aura fixtures have clearly defined openings in the back to create a subtle glow

Custom Requests and Additional Options
Availability depends on insert, system, and configuration
Must consult factory and allow up to 5 business days for an answer

Special beam angles, special LEDs, CRI 90, RGB-W, tunable, light inserts with different outputs, light inserts on different circuits

Special LEDs optimize luminaries to meet different applications
Gold+ invokes a heavy golden tone intended for bread and pastries
Meat+ displays saturated red light (white parts of product will appear slightly red)
Art+ highlights pieces of art without adversely affecting the perception of individual colors
Fashion+ has the entire color spectrum brilliantly orchestrated without distorting the color temperature

Configuration
Consult factory for patterns or custom designs
Provide configuration drawings

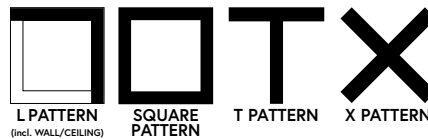

*Shop drawings provided upon receiving purchase order

Warranty

ZANEEN provides a limited warranty from date of purchase to original purchaser

LED Inserts : 5 year tested for 50,000 hours at 70% lumen output (L70)
LED Driver : 5 year
Non-Electrical Components : 1 year

*Check boxes to complete specification order and submit to quotes@zaneen.com to receive a formal BOM and a finalized model number

*In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

SYSTEM SUMMARY

Inserts

*Delivered lumens is the maximum possible; using widest lens, optic, or reflector

Linears

Hypline

Wattage: 16.5W - 33.0W
Lumen: 1595lm - 3545lm
Color Temperature: 27K, 30K, 35K, 40K
Length: 705mm (27 3/4") - 1408mm (55 7/16")

Hyp-Rico

Wattage: 16.5W - 33.0W
Lumen: 1762lm - 3915lm
Color Temperature: 27K, 30K, 35K, 40K
Length: 705mm (27 3/4") - 1408mm (55 7/16")

Spots

Centriq Spots

Wattage: 4.4W - 12.0W
Lumen: 258lm - 820lm
Color Temperature: 27K, 30K, 35K, 40K
Lens Option: 24°, 32°
Super Spot Option: 9°, 10°
Reflector/Lens Option: 20°, 31°, 36°, 40°, 50° / 15°, 17°, 25°, 33°, 35°, 46°
Available in 29 colors

Centriq / Centriq Double Spots

Wattage: 8.7W - 24.0W
Lumen: 517lm - 1640lm
Color Temperature: 27K, 30K, 35K, 40K
Lens Option: 24°, 32°
Super Spot Option: 9°, 10°
Reflector/Lens Option: 20°, 31°, 36°, 40°, 50° / 15°, 17°, 25°, 33°, 35°, 46°
Available in 29 colors

Downlights

Magiq 4+4 Downlights

Wattage: 26.6W
Lumen: 1280lm - 1760lm
Color Temperature: 27K, 30K, 35K, 40K
Lens Option: 21°, 38°
Reflector Option: 10°, 20°, 40°
Korona Available in 29 colors

Magiq 8 Downlights

Wattage: 26.6W
Lumen: 1280lm - 1760lm
Color Temperature: 27K, 30K, 35K, 40K
Lens Option: 21°, 38°
Reflector Option: 10°, 20°, 40°
Korona Available in 29 colors

Magiq 8+8 Downlights

Wattage: 53.1W
Lumen: 2560lm - 3434lm
Color Temperature: 27K, 30K, 35K, 40K
Lens Option: 21°, 38°
Reflector Option: 10°, 20°, 40°
Korona Available in 29 colors

Wallwasher

Magiq Hollow Wallwash

Wattage: 19.0W
Lumen: 1113lm - 1346lm
Color Temperature: 27K, 30K, 35K, 40K
Korona Available in 29 colors

Magiq Wallwash

Wattage: 31.4W
Lumen: 2303lm - 2651lm
Color Temperature: 27K, 30K, 35K, 40K
Available in Black and White

Panels

Hadi

TBD

WIRING DIAGRAMS


ALL ZANEEN FIXTURES ARE MANUFACTURED TO NORTH AMERICAN ELECTRICAL STANDARDS

Post Sales Support
 HQ 1-800-388-3382 X 625 support@zaneen.com


IMPORTANT:

- Do NOT connect directly to line voltage
- There is a minimum and maximum load per driver (See fixture and driver specifications).
- Fixture MUST be connected to LED driver, prior to turning power on

PHASE/NON-DIMMING WIRING DIAGRAM

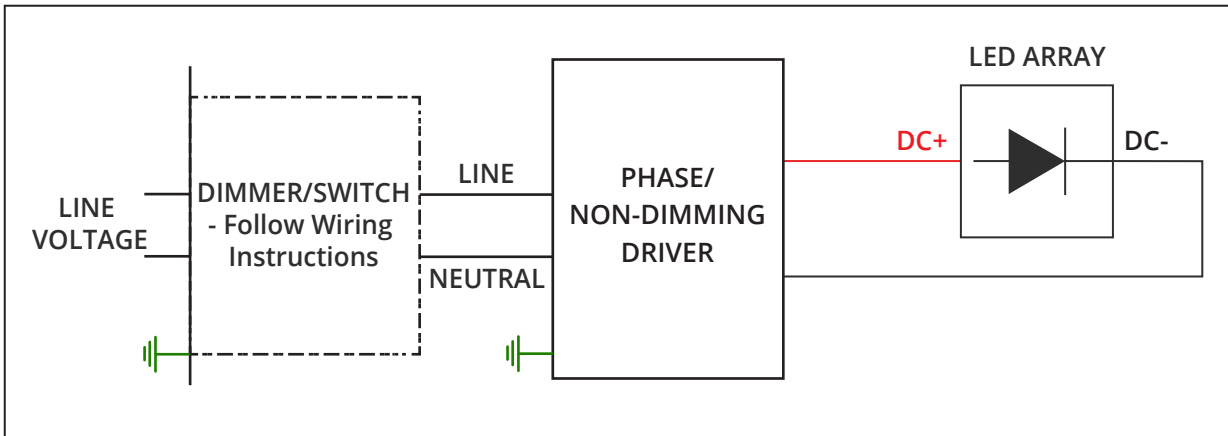

0-10V DIMMING WIRING DIAGRAM

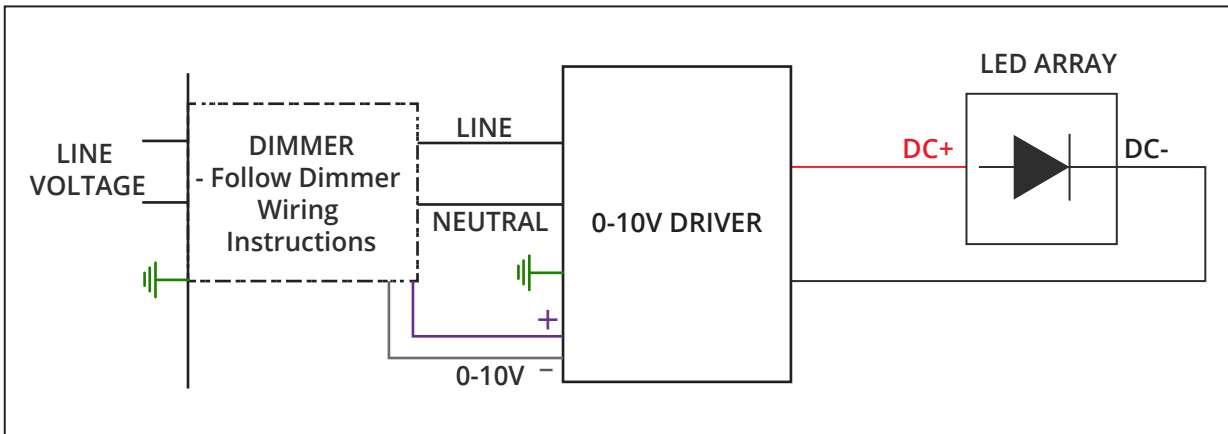

HYPRO 40 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERT CUSTOM DRAWING HERE OR ATTACH WITH ADDITIONAL PAGES