

## MINIMAL TRACK SURFACE SYSTEM SPECIFICATION SHEET


PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____




Seamlessly integrate different light inserts - from the elegant spotlights like IMAGINE MICRO to clean lines with MAGIQ MICRO or LED LINE, or the pendant luminaires like SNOOKER and HANGOVER that fit perfectly into the track. And for indirect light, especially on walls, the DISQ ROUND and DISQ SQUARE allow unlimited scope for individual design concepts.

### ARCHITECTURAL | MINIMAL TRACK

Flexible and almost invisible, the innovative MINIMAL TRACK lighting system combines pure minimalism with the latest technology. The surface rail can form the transitions from wall to ceiling or a right angle with 90° connectors. The T and X connectors are available in two different versions to suit a wide variety of tastes in design. In addition, with 45°, 90° and 180° curved connectors, this system offers numerous solutions for stabling curved profiles together.

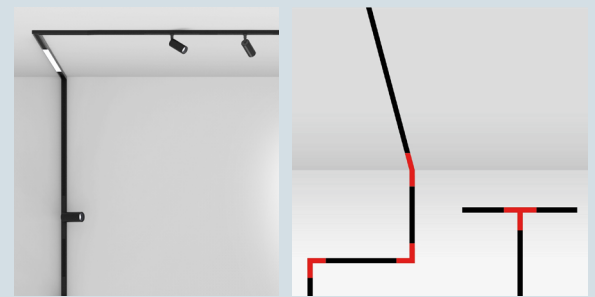

### SYSTEM PROFILE

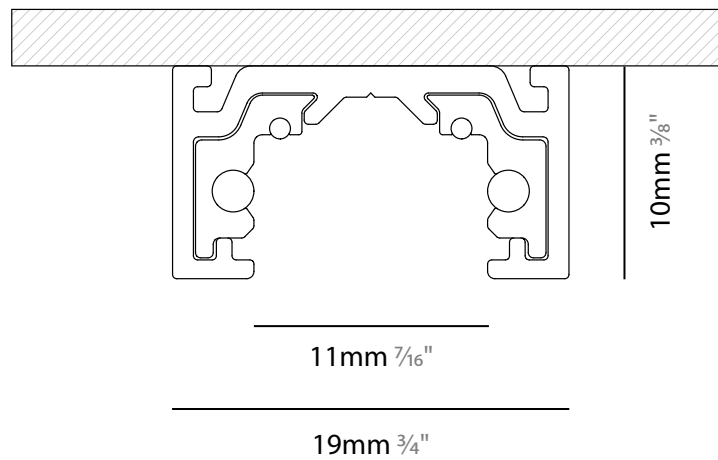

## MINIMAL TRACK SURFACE SYSTEM SPECIFICATION SHEET

PROJECT \_\_\_\_\_  
 TYPE \_\_\_\_\_  
 NOTES \_\_\_\_\_  
 QUANTITY \_\_\_\_\_  
 DATE \_\_\_\_\_

### SYSTEM GUIDE

To make your product selection and complete system specification, proceed with the following: review system options, create your system code in the field below and include your quantity. For the inserts and components, use the field beside each product name. Submit to quotes@zaneen.com to receive a formal BOM and finalized model numbers.





UPON REQUEST  
 Additional Options \_\_\_\_\_  
 \_\_\_\_\_ Color Temperature  
 \_\_\_\_\_ Lumen Outputs  
 \_\_\_\_\_ 0-10V Dimming  
 \_\_\_\_\_ Beam Angle  
 \_\_\_\_\_ CRI




EXAMPLE A3MINTRK-SUR-SYS-UNV-DN-1'S-01-01-02-02

**SYSTEM BUILD CODE: A3MINTRK-SUR-SYS-\_\_\_\_\_** **qty** \_\_\_\_\_

<b>ELECTRICAL</b>	Voltage	Dimming	Circuit
	<b>UNV</b> - 120/277V	<b>DN</b> - Non Dimming	<b>EMCIR</b> - Emergency Circuit
	<b>120</b> - 120V	<b>DD</b> - DALI (100-1%)	
	<b>347</b> - 347V	<b>MT</b> - Matter Dimming	

<b>LAYOUT</b>	Fixture Head Spacing	Run Shapes	System Finishes - See page 14 for color options and use 2 digit numbers to indicate your choices		
	<b>1'</b> - on center <b>2'</b> - on center <b>4'</b> - on center <b>CUS (XX)</b> - Custom <small>Spotlights - Minimum distance of 7"</small>	<b>S</b> _____ ' Straight <b>L</b> _____ 'x _____ ' Ceiling to Ceiling <b>LV</b> _____ 'x _____ ' Ceiling to Wall <b>U</b> _____ 'x _____ 'x _____ ' <b>R</b> _____ 'x _____ ' Rectangle <b>T</b> _____ 'x _____ ' <b>X</b> _____ 'x _____ ' <b>PAT</b> - Custom Pattern <small>(Consult factory with drawings - see curved tracks available below)</small>	Profile <b>◆</b> _____ (28 colors) 	Driver Box <b>◆</b> _____ (28 colors) <b>□</b> _____ (2 colors) 	End Cap _____  <b>Black - 02</b>  <b>White - 03</b>

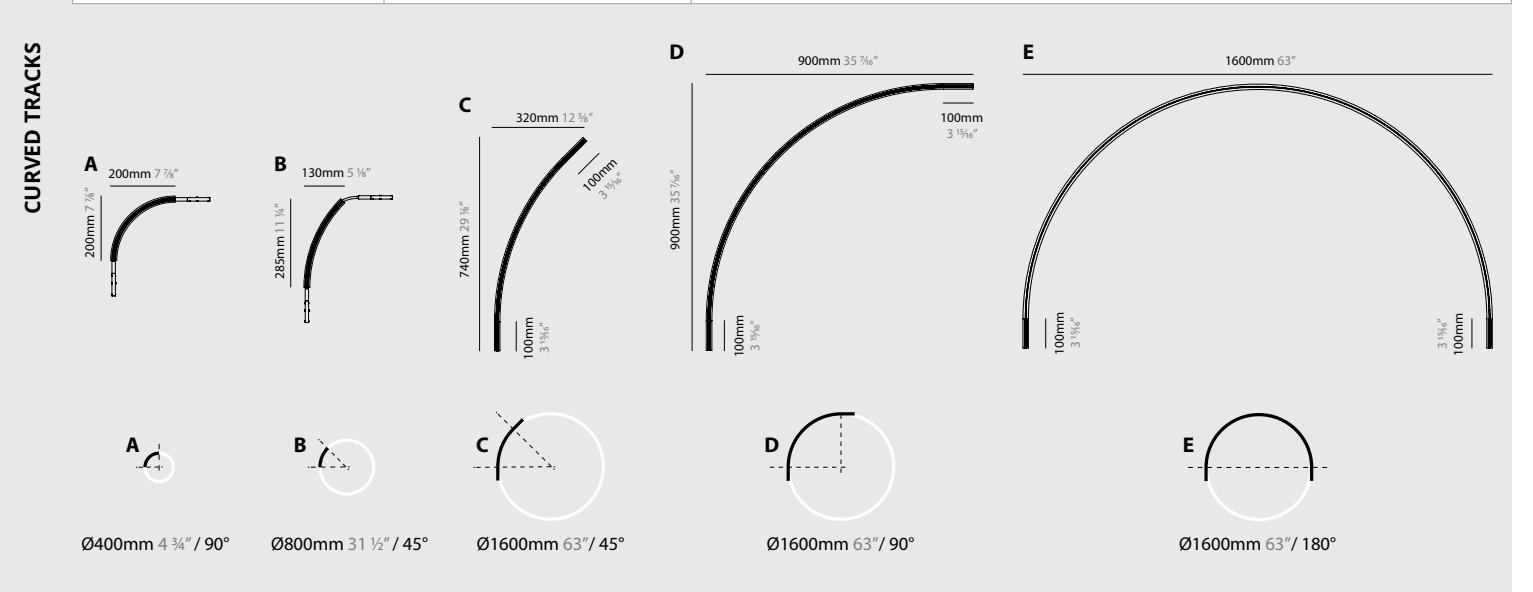



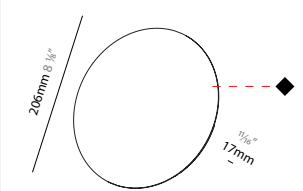

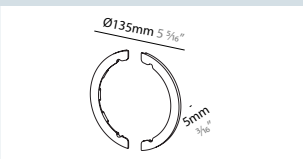
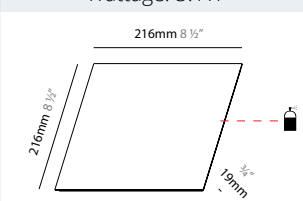

## MINIMAL TRACK SURFACE SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

BILO		INSERT BUILD CODE EXAMPLE: A380655-DN-27K-01-01-02-01-01		FINISHES/CABLE OPTIONS: See page 14 for color options and use 2 digit numbers to indicate your choices				
<b>INSERTS</b>	<b>BILO Ø120</b>	<b>A380655-</b>	qty					
	Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Cable	Diffuser Color	Delivered Lumen (lm)	
		<b>DN</b> - Non Dim	<b>27K</b> - 2700K	◆ ____	T ____ (5 colors/ 2 lengths)	● ____ (6 colors)	2700K	356
		<b>DD</b> - DALI	<b>30K</b> - 3000K	▲ ____			3000K	377
		<b>MT</b> - Matter Dim	<b>35K</b> - 3500K	□ ____			(2 colors)	3500K
		<b>40K</b> - 4000K					4000K	408
<b>DASH</b>		<b>A3T278-</b>		qty				
<b>DASH 2100</b>	Wattage: 5W	Dimming	Delivered Lumen (lm)					
	<b>DN</b> - Non Dim	CCT - 90 CRI		2700K		530		
	<b>DD</b> - DALI							
<b>MT</b> - Matter Dim								
<b>DASH 4200</b>		<b>A3T279-</b>		qty				
<b>DASH 4200</b>	Wattage: 10W	Dimming	Delivered Lumen (lm)					
	<b>DN</b> - Non Dim	CCT - 90 CRI		2700K		1060		
	<b>DD</b> - DALI							
<b>MT</b> - Matter Dim								
<b>DASH COMPONENTS</b>	<b>DASH 2 TRACK</b>	<b>A3T280</b>	qty	Connector to mount the end of DASH inside the track.				
							<b>A3T281</b>	qty
	<b>DASH 2 SURFACE</b>	<b>A3T282</b>	qty	Connector to mount the end of DASH to a wall or ceiling.				
						<b>A3T283 - Black</b>		
Weight attachable at the end of DASH, to suspend vertically.								

## MINIMAL TRACK SURFACE SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

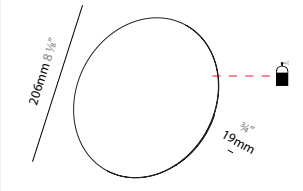DISQ ROUND		FINISHES/CABLE OPTIONS: See page 14 for color options and use 2 digit numbers to indicate your choices	
<b>INSERTS</b>	<b>DISQ ROUND DIBOND COVER</b> <b>A380758-</b>	qty	
	Wattage: 5.1W	Dimming	Finish
		<b>DN</b> - Non Dim <b>DD</b> - DALI <b>MT</b> - Matter Dim	 (3 colors - choose 2 digit code below)
<b>DISQ ROUND</b> <b>A380759-</b>	qty		
Wattage: 5.1W	Dimming	Finish	Delivered Lumen (lm)
	<b>DN</b> - Non Dim <b>DD</b> - DALI <b>MT</b> - Matter Dim	 (28 colors)	CCT - 90 CRI 2700K      400
<b>ACCESSORY</b>	<b>DISQ ROUND AURA COVER</b> <b>A380203-</b>	qty	
		Finish	_____ (5 colors - choose 3 letter code below) Yellow - <b>YEL</b> Orange - <b>ORA</b> Red - <b>RED</b> Blue - <b>BLU</b> Green - <b>GRN</b>
<b>DISQ SQUARE</b>			
<b>INSERTS</b>	<b>DISQ SQUARE DIBOND COVER</b> <b>A380760-</b>	qty	
	Wattage: 5.1W	Dimming	Finish
		<b>DN</b> - Non Dim <b>DD</b> - DALI <b>MT</b> - Matter Dim	 (3 colors - choose 2 digit code below)

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

### DISQ SQUARE

#### FINISHES/CABLE OPTIONS:

See page 14 for color options and use 2 digit numbers to indicate your choices

INSERTS

	<b>DISQ SQUARE</b>	<b>A380761-</b>	qty	
	Wattage: 5.1W	Dimming	Finish	Delivered Lumen (lm)
	<b>DN</b> - Non Dim <b>DD</b> - DALI <b>MT</b> - Matter Dim	◆ ____ (28 colors)	CCT - 90 CRI 2700K      400	

ACCESSORY

	<b>DISQ SQUARE AURA COVER</b>	<b>A380204-</b>	qty	
	Finish	____ (5 colors - choose 3 letter code below) Yellow - <b>YEL</b> Orange - <b>ORA</b> Red - <b>RED</b> Blue - <b>BLU</b> Green - <b>GRN</b>		

### HANGOVER PLUG

	<b>Ø28 H:150</b>	<b>A380738-</b>	qty						
	Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Reflector	Shine Ring	Adapter	Cable	Delivered Lumen (lm)
	<b>DN</b> - Non Dim <b>DD</b> - DALI <b>MT</b> - Matter Dim	<b>27K</b> - 2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	◆ ____ ▲ ____ ● ____ (28 colors)	<b>20</b> - 20° <b>26</b> - 26° <b>56</b> - 56°	○ ____ (6 colors) No shine ring: indicate with <b>00</b>	□ ____ (2 colors)	T ____ (5 colors/ 2 lengths)	CCT    20°    26°    56° 2700K    403    397    381 3000K    427    420    404 3500K    451    443    426 4000K    463    455    438	

	<b>Ø28 H:300</b>	<b>A380739-</b>	qty						
	Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Reflector	Shine Ring	Adapter	Cable	Delivered Lumen (lm)
	<b>DN</b> - Non Dim <b>DD</b> - DALI <b>MT</b> - Matter Dim	<b>27K</b> - 2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	◆ ____ ▲ ____ ● ____ (28 colors)	<b>20</b> - 20° <b>26</b> - 26° <b>56</b> - 56°	○ ____ (6 colors) No shine ring: indicate with <b>00</b>	□ ____ (2 colors)	T ____ (5 colors/ 2 lengths)	CCT    20°    26°    56° 2700K    403    397    381 3000K    427    420    404 3500K    451    443    426 4000K    463    455    438	

## MINIMAL TRACK SURFACE SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS

### HANGOVER PLUG

**FINISHES/CABLE OPTIONS:**

See page 14 for color options and use 2 digit numbers to indicate your choices

Ø28 H:450	A380740-								qty				
		Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Reflector	Shine Ring	Adapter	Cable	Delivered Lumen (lm)			
	DN - Non Dim	27K - 2700K	◆	20 - 20°	○	□	┌	CCT 20° 26° 56°	(5 colors/ 2 lengths)	2700K	403	397	381
	DD - DALI	30K - 3000K	▲	26 - 26°	(6 colors) No shine ring: indicate with <b>00</b>	(2 colors)	3000K			427	420	404	
	MT - Matter Dim	35K - 3500K	●	56 - 56°			3500K			451	443	426	
	40K - 4000K	(28 colors)	4000K	463			455			438			
	2700K	403	397	381									

Ø40 H:150	A380750-								qty			
		Wattage: 9.8W	Dimming	CCT - 90 CRI	Finish	Reflector	Shine Ring	Adapter	Cable	Delivered Lumen (lm)		
	DN - Non Dim	27K - 2700K	◆	40 - 40°	○	□	┌	CCT 40° 52°	(5 colors/ 2 lengths)	2700K	694	684
	DD - DALI	30K - 3000K	▲	52 - 52°	(6 colors) No shine ring: indicate with <b>00</b>	(2 colors)	3000K			726	716	
	MT - Matter Dim	35K - 3500K	●	4000K			753			742		
	4000K	770	759									
	2700K	694	684									

Ø40 H:300	A380751-								qty			
		Wattage: 9.8W	Dimming	CCT - 90 CRI	Finish	Reflector	Shine Ring	Adapter	Cable	Delivered Lumen (lm)		
	DN - Non Dim	27K - 2700K	◆	40 - 40°	○	□	┌	CCT 40° 52°	(5 colors/ 2 lengths)	2700K	694	684
	DD - DALI	30K - 3000K	▲	52 - 52°	(6 colors) No shine ring: indicate with <b>00</b>	(2 colors)	3000K			726	716	
	MT - Matter Dim	35K - 3500K	●	4000K			753			742		
	4000K	770	759									
	2700K	694	684									

Ø40 H:450	A380752-								qty			
		Wattage: 9.8W	Dimming	CCT - 90 CRI	Finish	Reflector	Shine Ring	Adapter	Cable	Delivered Lumen (lm)		
	DN - Non Dim	27K - 2700K	◆	40 - 40°	○	□	┌	CCT 40° 52°	(5 colors/ 2 lengths)	2700K	694	684
	DD - DALI	30K - 3000K	▲	52 - 52°	(6 colors) No shine ring: indicate with <b>00</b>	(2 colors)	3000K			726	716	
	MT - Matter Dim	35K - 3500K	●	4000K			753			742		
	4000K	770	759									
	2700K	694	684									

## MINIMAL TRACK SURFACE SYSTEM SPECIFICATION SHEET

HANGOVER PLUG		FINISHES/CABLE OPTIONS: See page 14 for color options and use 2 digit numbers to indicate your choices							qty				
INSERTS	<b>Ø75 H:150 DIRECT</b>	<b>A380741-</b>											
	Wattage: 9.8W	Dimming	CCT - 90 CRI	Finish	Shine Ring	Reflector	Adapter	Cable	Delivered Lumen (lm)				
		<b>DN</b> - Non Dim	<b>27K</b> - 2700K	◆	○	<b>18</b> - 18°	□	┌	<b>CCT</b>	<b>18°</b>	<b>36°</b>	<b>56°</b>	
		<b>DD</b> - DALI	<b>30K</b> - 3000K	▲	(6 colors)	<b>36</b> - 36°	(2 colors)	(5 colors/ 2 lengths)	2700K	857	855	851	
		<b>MT</b> - Matter Dim	<b>35K</b> - 3500K	●	No shine ring: indicate with <b>00</b>	<b>56</b> - 56°			3000K	896	894	890	
			<b>40K</b> - 4000K	(28 colors)					3500K	930	927	923	
								4000K	951	948	944		
	<b>Ø75 H:150 DIR/IND</b>	<b>A380742-</b>								qty			
	Wattage: 20W	Dimming	CCT - Direct	CCT - Indirect	Finish	Shine Ring	Reflector	Adapter	Cable	Delivered Lumen (lm)			
		<b>DN</b> - Non Dim	<b>27K</b> - 2700K	<b>27K</b> - 2700K	◆	○	<b>18</b> - 18°	□	┌	<b>CCT</b>	<b>18°</b>	<b>36°</b>	<b>56°</b>
		<b>DD</b> - DALI	<b>30K</b> - 3000K	<b>30K</b> - 3000K	▲	(6 colors)	<b>36</b> - 36°	(2 colors)	(5 colors/ 2 lengths)	27K/27K	1696	1692	1690
		<b>MT</b> - Matter Dim	<b>35K</b> - 3500K	<b>40K</b> - 4000K	●	No shine ring: indicate with <b>00</b>	<b>56</b> - 56°			30K/30K	1771	1768	1765
			<b>40K</b> - 4000K		(28 colors)					35K/30K	1798	1795	1792
										40K/40K	1833	1829	1826
	<b>Ø28 H:150</b>	<b>A380743-</b>								qty			
	Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Reflector	Adapter	Cable	Delivered Lumen (lm)					
		<b>DN</b> - Non Dim	<b>27K</b> - 2700K	◆	<b>32</b> - 32°	□	┌	<b>CCT</b>	<b>32°</b>	<b>58°</b>			
		<b>DD</b> - DALI	<b>30K</b> - 3000K	▲	<b>58</b> - 58°	(2 colors)	(5 colors/ 2 lengths)	2700K	283	310			
		<b>MT</b> - Matter Dim	<b>35K</b> - 3500K	●				3000K	300	328			
			<b>40K</b> - 4000K	(28 colors)				3500K	317	347			
								4000K	325	356			
	<b>Ø28 H:300</b>	<b>A380744-</b>								qty			
	Wattage: 6.4W	Dimming	CCT - 90 CRI	Finish	Reflector	Adapter	Cable	Delivered Lumen (lm)					
		<b>DN</b> - Non Dim	<b>27K</b> - 2700K	◆	<b>32</b> - 32°	□	┌	<b>CCT</b>	<b>32°</b>	<b>58°</b>			
		<b>DD</b> - DALI	<b>30K</b> - 3000K	▲	<b>58</b> - 58°	(2 colors)	(5 colors/ 2 lengths)	2700K	283	310			
		<b>MT</b> - Matter Dim	<b>35K</b> - 3500K	●				3000K	300	328			
			<b>40K</b> - 4000K	(28 colors)				3500K	317	347			
								4000K	325	356			

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS

### HANGOVER PLUG MICRO-DOT

**FINISHES/CABLE OPTIONS:**

See page 14 for color options and use 2 digit numbers to indicate your choices

Wattage: 6.4W	A380745-						qty		
	Dimming	CCT - 90 CRI	Finish	Reflector	Adapter	Cable	Delivered Lumen (lm)		
	DN - Non Dim	27K - 2700K	◆ _____	32 - 32°	□ _____	┌ _____	CCT	32°	58°
	DD - DALI	30K - 3000K	▲ _____	58 - 58°	(2 colors)	(5 colors/ 2 lengths)	2700K	283	310
	MT - Matter Dim	35K - 3500K	● _____	(28 colors)			3000K	300	328
		40K - 4000K					3500K	317	347
							4000K	325	356

### IMAGINE MICRO





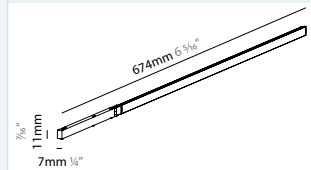
Wattage: 4.4W	A380746-				qty				
	Dimming	CCT - 90 CRI	Finish	Adapter	Delivered Lumen (lm)				
	DN - Non Dim	27K - 2700K	◆ _____	□ _____	CCT	26°/28°/38°/46°/64°			
	DD - DALI	30K - 3000K	(28 colors)	(02 colors)	2700K	252/206/210/198/180			
	MT - Matter Dim	35K - 3500K			3000K	271/221/226/213/193			
		40K - 4000K			3500K	284/231/236/223/203			
					4000K	290/236/241/228/207			

Wattage: 8.6W	A380747-					qty			
	Dimming	CCT - 90 CRI	Finish	Reflector	Adapter	Delivered Lumen (lm)			
	DN - Non Dim	27K - 2700K	◆ _____	22 - 22°	□ _____	CCT	22°	36°	62°
	DD - DALI	30K - 3000K	(28 colors)	36 - 36°	(02 colors)	2700K	529	554	486
	MT - Matter Dim	35K - 3500K		62 - 62°		3000K	564	590	517
		40K - 4000K				3500K	593	620	544
						4000K	607	636	557

Wattage: 7.1W	A380748-					qty	
	Dimming	CCT - 90 CRI	Finish	Adapter	Delivered Lumen (lm)		
	DN - Non Dim	27K - 2700K	◆ _____	□ _____	CCT	14° - 52°	
	DD - DALI	30K - 3000K	▲ _____	(02 colors)	2700K	175 - 328	
	MT - Matter Dim	35K - 3500K	(28 colors)		3000K	183 - 342	
		40K - 4000K			3500K	189 - 355	
					4000K	193 - 362	



PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS	IMAGINE MICRO						FINISHES OPTIONS: See page 14 for color options and use 2 digit numbers to indicate your choices		
	<b>IMAGINE MICRO DOT</b> Wattage: 6.4W 	<b>A380749-</b>	Dimming	CCT - 90 CRI	Finish	Reflector	Adapter	qty	
		<b>DN</b> - Non Dim <b>DD</b> - DALI <b>MT</b> - Matter Dim	<b>27K</b> - 2700K <b>30K</b> - 3000K <b>35K</b> - 3500K <b>40K</b> - 4000K	◆ ____ ▲ ____ (28 colors)	<b>34</b> - 34° <b>52</b> - 52°	□ ____ (02 colors)	Delivered Lumen (lm)		
							CCT	34°	52°
							2700K	205	235
							3000K	220	252
							3500K	231	265
							4000K	236	270
MAGIQ MICRO									
<b>MAGIQ MICRO</b> Wattage: 4.9W 	<b>A380604-</b>	Dimming	CCT - 90 CRI	Finish	qty				
		<b>DN</b> - Non Dim <b>DD</b> - DALI <b>MT</b> - Matter Dim	<b>27K</b> - 2700K <b>30K</b> - 3000K <b>40K</b> - 4000K	□ ____ (02 colors)	Delivered Lumen (lm)				
					2700K	370			
					3000K	384			
					4000K	417			
MELT MINI									
<b>MELT MINI</b> Wattage: 6.2W 	<b>A380611-</b>	Dimming	Finish	Adapter	Cable	qty			
		<b>DN</b> - Non Dim <b>DD</b> - DALI <b>MT</b> - Matter Dim	◆ ____ (28 colors) ⊕ ____ (4 colors - choose 3 letter code below) Chrome - CHR   Copper - COP   Gold - GLD   Smoke - SMK 	□ ____ (02 colors)	⌈ ____ (5 colors/ 2 lengths)	Delivered Lumen (lm)			
						<b>Finish</b>	<b>CCT: 3000K</b>		
						Chrome	158		
						Copper	220		
						Gold	235		
						Smoke	44		
MICROLINE									
<b>MICROLINE 674</b> Wattage: 8W 	<b>A380596-</b>	Dimming	CCT - 90 CRI	qty					
		<b>DN</b> - Non Dim <b>DD</b> - DALI <b>MT</b> - Matter Dim	<b>27K</b> - 2700K <b>30K</b> - 3000K	Delivered Lumen (lm)					
				2700K	386				
				3000K	429				

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS

### MICROLINE

**FINISHES/CABLE OPTIONS:**

See page 14 for color options and use 2 digit numbers to indicate your choices

MICROLINE 1170	A380597-			qty	
Wattage: 15.8W	Dimming	CCT - 90 CRI		Delivered Lumen (lm)	
	<b>DN</b> - Non Dim	<b>27K</b> -2700K		2700K	772
	<b>DD</b> - DALI	<b>30K</b> - 3000K		3000K	858
	<b>MT</b> - Matter Dim				

MICROLINE 1670	A380598-			qty	
Wattage: 24W	Dimming	CCT - 90 CRI		Delivered Lumen (lm)	
	<b>DN</b> - Non Dim	<b>27K</b> -2700K		2700K	1158
	<b>DD</b> - DALI	<b>30K</b> - 3000K		3000K	1287
	<b>MT</b> - Matter Dim				

### TRACK OPAL

TRACK OPAL Ø250	A380608-			qty		
Wattage: 6.2W	Dimming	Finish	Adapter	Cable	Delivered Lumen (lm)	
	<b>DN</b> - Non Dim	◆ _____ (28 colors)	□ _____ (02 colors)	┌ _____ (5 colors/ 2 lengths)	CCT - 90 CRI	
	<b>DD</b> - DALI				3000K	560
	<b>MT</b> - Matter Dim					

### SNOOKER

SNOOKER	A380755-					qty		
Wattage: 6.4W	Dimming	Finish	Shine Ring	Cable	Reflector	Delivered Lumen (lm)		
	<b>DN</b> - Non Dim	◆ _____	○ _____	┌ _____	<b>32 - 32°</b>	CCT	32°	58°
	<b>DD</b> - DALI	▲ _____ (28 colors)	(6 colors) No shine ring; indicate with <b>00</b>	(5 colors/ 2 lengths)	<b>58 - 58°</b>	2700K	283	310
	<b>MT</b> - Matter Dim	□ _____ (2 colors)				3000K	300	328
						3500K	317	347
						4000K	325	356

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS	SNOOKER		FINISHES/CABLE OPTIONS: See page 14 for color options and use 2 digit numbers to indicate your choices				qty			
		<b>SNOOKER GLASS</b>	<b>A380756-</b>	Dimming	Finish	Cable	Reflector	Diffuser Color	Delivered Lumen (lm)	
Wattage: 6.4W			<b>DN</b> - Non Dim <b>DD</b> - DALI <b>MT</b> - Matter Dim	◆ ____ ▲ ____ (28 colors) □ ____ (2 colors)	T ____ (5 colors/ 2 lengths)	<b>32</b> - 32° <b>58</b> - 58°	● ____ (6 colors)	CCT	32°	58°
								2700K	283	310
								3000K	300	328
								3500K	317	347
								4000K	325	356
	<b>SNOOKER METAL</b>	<b>A380737-</b>	Dimming	Finish	Shine Ring	Cable	Reflector	Delivered Lumen (lm)		
	Wattage: 6.4W		<b>DN</b> - Non Dim <b>DD</b> - DALI <b>MT</b> - Matter Dim	◆ ____ (28 colors) □ ____ (2 colors)	○ ____ (6 colors) No shine ring: indicate with <b>00</b>	T ____ (5 colors/ 2 lengths)	<b>32</b> - 32° <b>58</b> - 58°	CCT	32°	58°
								2700K	283	310
								3000K	300	328
								3500K	317	347
								4000K	325	356

COMPONENTS	WALL/CEILING CABLE LOOP		A3T142-		qty
		Finish	◆ ____	Mounting point for threading or suspension of the Plug-Cable from a ceiling or the wall.	
		(28 colors)			
	<b>WALL/CEILING CABLE ROLLER</b>	<b>A3T143-</b>	Finish	◆ ____	qty
			(28 colors)	Mounting point for threading or suspension of the Plug-Cable from a ceiling or the wall. The roller allows storing of additional cable length.	
	<b>TRACK CABLE LOOP</b>	<b>A3T323-</b>	Finish	◆ ____	qty
			(28 colors)	Mounting point for threading or suspension of the Plug-Cable from a track.	

PROJECT \_\_\_\_\_

TYPE \_\_\_\_\_

NOTES \_\_\_\_\_







QUANTITY \_\_\_\_\_

DATE \_\_\_\_\_

**COMPONENTS**

**FINISHES:**

See page 14 for color options and use 2 digit numbers to indicate your choices

<p><b>TRACK CABLE ROLLER</b></p>  <p>Ø17mm 5/8"</p>	<p><b>A3T324-</b> <span style="float: right;">qty</span></p>
<p><b>SUSPENDED ROLLER</b></p>  <p>Ø17mm 5/8"</p>	<p><b>A3T325-</b> <span style="float: right;">qty</span></p> <p>Finish</p> <p>◆ _____</p> <p>(28 colors)</p> <p style="text-align: right;">The suspended roller allows storing of additional cable length.</p>
<p><b>RUBBER TRACK MASK BLACK</b></p>  <p>7mm 1/4"</p> <p>13mm 1/2"</p>	<p><b>A3T187</b> <span style="float: right;">qty</span></p> <p>Max length of a single run is 5000mm 196 7/8". Lengths are pre cut at the factory.</p>
<p><b>COVER STRIP</b></p>  <p>6mm 1/4"</p> <p>14mm 1/2"</p>	<p><b>A3T298-</b> <span style="float: right;">qty</span></p> <p>Finish</p> <p>_____ (use 2 digit number below)</p> <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  <p>Black - 02</p> </div> <div style="text-align: center;">  <p>White - 03</p> </div> </div> <p style="text-align: right;">Rigid track mask, max length of a single run is 3000mm 118 1/8". Lengths are pre cut at the factory.</p>

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

### SYSTEM SUMMARY

#### System

**Type**  
Surface  
Rated for Dry Locations Ceiling and Wall Mounted

**Approval Status**  
Certified to North American Standards

**Emission**  
Refer to emission icon beside each light insert and symbol legend for descriptions

#### Profile

**Measurement**  
w 19mm (¾") x ht. 10mm (⅜")

**Housing**  
Anodized extruded aluminum track profile available per meter and field-cuttable Profiles have a maximum length of 3000mm (9' 10 15/16") and joined together with couplers to ensure uniform appearance and easy installation  
Pre-drilled track is surface mounted with drills every 400mm

#### Electrical

**Connections**  
Luminaries are pre-wired by factory with track adapters

**Power Feed**  
Located at the end of the rail with a hole in the center of the end cap.  
If a different location is required, please specify  
A connector is located on one end of the 48V profile channel to carry the electrical power from the supply unit - there is 125mm (4 15/16") of unusable space for inserts from the end cap.  
Linear connector takes 115mm (4 1/2") of unusable space.  
L connector takes 141mm x 141mm (5 5/16" x 5 5/16") of unusable space.  
3 Wires - non-dimming  
5 Wires - Dimming

**LED Driver**  
Driver Included with Power Supply Unit (Non-dimming only). 0-10V driver must be remote with supplied enclosure. Maximum distance between the power supply and the last fixture on the circuit is 30' using a 18-gauge wire. For more than 30', the gauge of the wire must be determined by a certified professional. The length of the fixture specified must be considered within the maximum distance of 3'. Provisions must be made on site for accessibility to the power supplies.  
Electronic Class 2 driver, Universal 120V/277V  
Non Dimming Driver and Dimming Driver.  
Consult factory for driver cutsheet  
If a different driver is required, please specify

**Emergency Inverter Compatible**  
To be installed remotely, and provided by others  
It can be located up to 250m away from the fixture

Emergency circuit wiring is available upon request (Isolated track with dedicated driver used for emergency circuit will connect to emergency battery pack - supplied by others)

#### General


**Features**  
The surface mounted system is particularly easy to install on any wall or ceiling, while its ultra-slim design gives it the appearance of an embedded system.

The ultra-compact design makes the sophisticated technology almost invisible, leaving only elegant lines that integrate perfectly into the interior design. Thanks to the various corner connectors and even individually available curve elements, Minimal Track makes it easy to realize creative living dreams.

**Custom Requests and Additional Options**  
Availability depends by insert, system, and configuration  
Must consult factory and allow up to 5 business days for an answer

Color Temperature, CRI, special beam angles, track finish color, and light inserts with different outputs

**Configuration**  
Consult factory for patterns or custom designs  
Provide configuration drawings

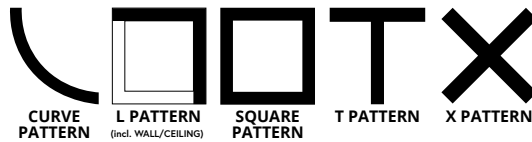

\*Shop drawings provided upon receiving purchase order

#### Warranty

ZANEEN provides a limited warranty from date of purchase to original purchaser

**LED Inserts:** 5 year tested for 50,000 hours at 70% lumen output (L70)  
**LED Driver:** 5 year  
**Non-Electrical Components:** 1 year

\*Check boxes to complete specification order and submit to quotes@zaneen.com to receive a formal BOM and a finalized model number

\*In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

## MINIMAL TRACK SURFACE SYSTEM SPECIFICATION SHEET

### FINISH COLORS




Sparkling Silver - 01



Black Velvet - 02




Crystal White - 03



Creamy - 04




Hampton Bay - 05




Urban Forest - 07



In the Army - 08



Rusty Angel - 09



Fade to Grey - 12



Mysterious Grey - 13



Lost Dream - 15



Purple Sky - 16




Fresh Oh - 17




Funky P - 18



Kissing Aphrodite - 19




Poseidon's Paradise - 20




Blue Sky - 21



Spring Green - 22



Mellow Yellow - 23



Golden Heart - 24



Gun Metal - 25



Champagne Cream - 26



Copper Mine - 27



Ancient Bronze - 28




Jazz Gold - 29




Olive Breeze - 30



Moonlight Silver - 31



Rosewood Red - 32




### ADAPTER/FRAME



Black - 02



White - 03



### CABLE (COLORS/LENGTH)



Black/2m 01  
 White/2m 03  
 Orange/2m 05  
 Red/2m 07  
 Green/2m 09

Black/4m 02  
 White/4m 04  
 Orange/4m 06  
 Red/4m 08  
 Green/4m 10

Black 1m and 10m available upon request.

### DIFFUSER/SHINE RING



Opal - 01



Yellow - 02



Orange - 03



Red - 04



Blue - 05



Green - 06



**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

**Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.

**Gun Metal:** No Gun Metal finish is alike. It combines a mixture of transparent and black color particles which ensures a highly individual effect and no luminaire being identical.

**Champagne Cream, Copper Mine, Ancient Bronze + Jazz Gold:** These finishes have slight fading from specific powder coating production. Each luminaire will slightly vary.

RAL Color Upon Request



### LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimnable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

### IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

### IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

### WIRING DIAGRAMS


ALL ZANEEN FIXTURES ARE MANUFACTURED TO NORTH AMERICAN ELECTRICAL STANDARDS

Post Sales Support  
HQ 1-800-388-3382 X 625 support@zaneen.com


#### IMPORTANT

- Do NOT connect directly to line voltage
- There is a minimum and maximum load per driver (See fixture and driver specifications).
- Fixture MUST be connected to LED driver, prior to turning power on

#### PHASE/NON-DIMMING WIRING DIAGRAM

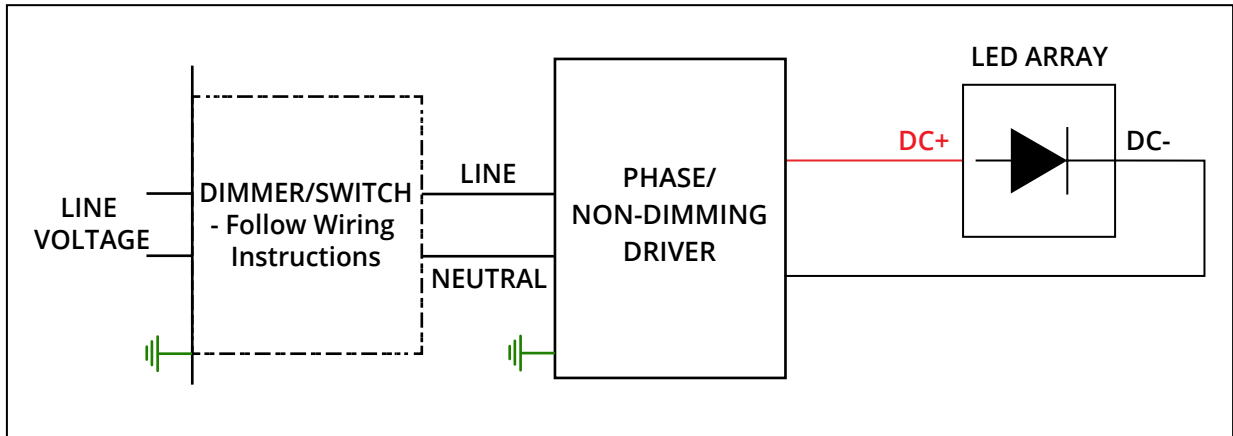

#### 0-10V DIMMING WIRING DIAGRAM

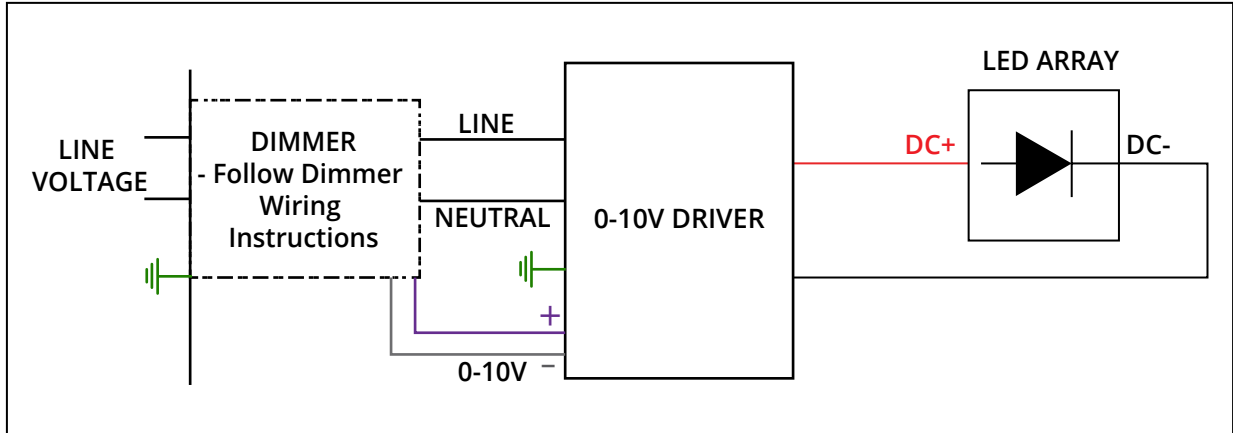



## MINIMAL TRACK SURFACE SYSTEM SPECIFICATION SHEET

PROJECT \_\_\_\_\_  
TYPE \_\_\_\_\_  
NOTES \_\_\_\_\_  
QUANTITY \_\_\_\_\_  
DATE \_\_\_\_\_

Insert custom drawing here or attach with additional pages

