

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____





ARCHITECTURAL | SILHOUETTES

SILHOUETTES is a collection of suspended rings and round edged squares made of extruded aluminum with an opal polycarbonate screen covering an LED strip that runs the internal side of the profile. The minimalism of the structure combined with the emission of internal light gives the luminaire an incredible lightness. Silhouettes is designed for clustering and cascading, providing flexibility in size, configuration, and design. There are 27 standard color finish options available ensuring limitless customization options to complement any interior design.



SYSTEM OVERVIEW

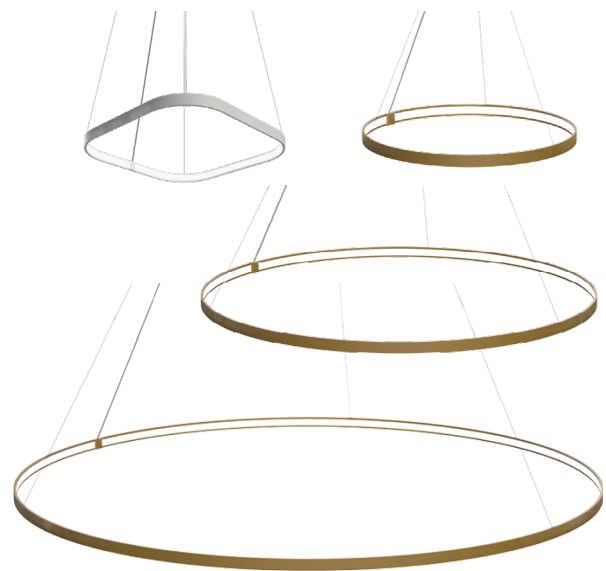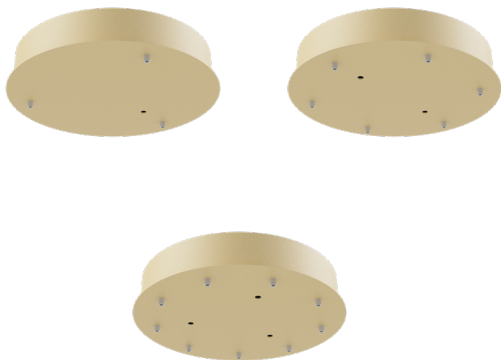


SILHOUETTES MODULAR SYSTEM SPECIFICATION SHEET

PROJECT _____
 TYPE _____
 NOTES _____
 QUANTITY _____
 DATE _____

SYSTEM GUIDE

To make your product selection and complete system specification, proceed with the following:
 review system options, create your system code in the field below and include your quantity.
 For the canopies/pendants, use the field beside each product name.
 Submit to quotes@zaneen.com to receive a formal BOM and finalized model numbers.



UPON REQUEST
 Additional Options _____
 _____ Color Temperature
 _____ Canopy Configuration

EXAMPLE A3SILH-MOD-SYS-UNV-DN

SYSTEM BUILD CODE: A3SILH-MOD-SYS- **qty**

ELECTRICAL	Voltage	Dimming
	UNV - 120/277V	DN - Non Dim
	120 - 120V	DP - Phase Dim (Triac/ELV)
	347 - 347V	DD - DALI (100-1%)

MODULES	CANOPY	BUILD CODE EXAMPLE: A39005-01	FINISHES OPTIONS: See page 5 for color options and use 2 digit numbers to indicate your choices
		FOR 1 PENDANT	A39005-
		Finish	
		◆ _____ (27 colors)	
	FOR 2 PENDANTS	A39006-	qty
		Finish	
		◆ _____ (27 colors)	
	FOR 3 PENDANTS	A39007-	qty
		Finish	
		◆ _____ (27 colors)	






PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

PENDANTS

SILHOUETTES RINGS

FINISHES OPTIONS:

See page 5 for color options and use 2 digit numbers to indicate your choices

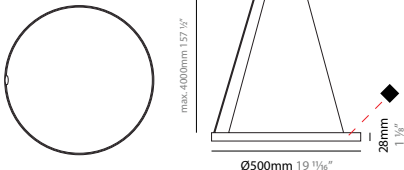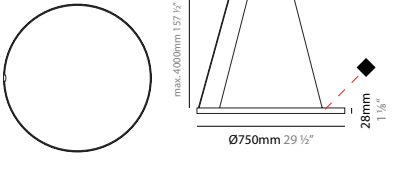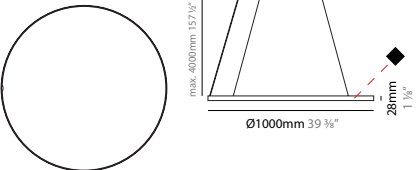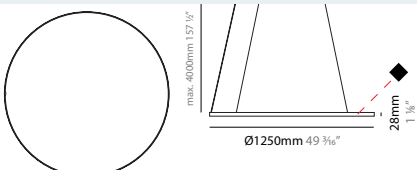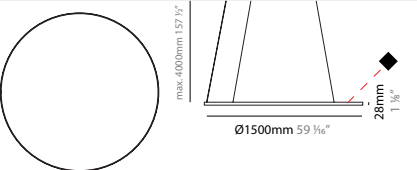SILHOUETTES Ø500	A31054-	qty	
Wattage: 24W	Dimming	Finish	Delivered Lumen (lm)
	DN - Non Dim DP - Phase Dim	◆ _____ (27 colors)	CRI: 90 3000K 1830
SILHOUETTES Ø750	A31055-	qty	
Wattage: 37W	Dimming	Finish	Delivered Lumen (lm)
	DN - Non Dim DP - Phase Dim	◆ _____ (27 colors)	CRI: 90 3000K 2790
SILHOUETTES Ø1000	A31056-	qty	
Wattage: 50W	Dimming	Finish	Delivered Lumen (lm)
	DN - Non Dim DP - Phase Dim	◆ _____ (27 colors)	CRI: 90 3000K 3740
SILHOUETTES Ø1250	A31057-	qty	
Wattage: 62W	Dimming	Finish	Delivered Lumen (lm)
	DN - Non Dim DP - Phase Dim	◆ _____ (27 colors)	CRI: 90 3000K 4640
SILHOUETTES Ø1500	A31058-	qty	
Wattage: 75W	Dimming	Finish	Delivered Lumen (lm)
	DN - Non Dim DP - Phase Dim	◆ _____ (27 colors)	CRI: 90 3000K 5600

PROJECT _____

TYPE _____

NOTES _____

QUANTITY _____

DATE _____

PENDANTS		SILHOUETTES SQUARE		FINISHES OPTIONS: See page 5 for color options and use 2 digit numbers to indicate your choices			
		SILHOUETTES 460		A31059-		qty	
Wattage: 18W		Dimming		Finish		Delivered Lumen (lm)	
		DN - Non Dim DP - Phase Dim		◆ _____ (27 colors)		CRI: 90 3000K 1310	
SILHOUETTES 680		A31060-		qty			
Wattage: 31W		Dimming		Finish		Delivered Lumen (lm)	
		DN - Non Dim DP - Phase Dim		◆ _____ (27 colors)		CRI: 90 3000K 2360	

PROJECT _____
 TYPE _____
 NOTES _____
 QUANTITY _____
 DATE _____

FINISH COLORS




Sparkling Silver - 01



Black Velvet - 02




Crystal White - 03



Creamy - 04



Hampton Bay - 05



Urban Forest - 07



In the Army - 08



Rusty Angel - 09



Fade to Grey - 12



Mysterious Grey - 13



Lost Dream - 15



Purple Sky - 16



Fresh Oh - 17




Funky P - 18



Kissing Aphrodite - 19




Poseidon's Paradise - 20



Blue Sky - 21



Spring Green - 22



Mellow Yellow - 23



Golden Heart - 24



Champagne Cream - 26



Copper Mine - 27



Ancient Bronze - 28



Jazz Gold - 29



Olive Breeze - 30



Moonlight Silver - 31



Rosewood Red - 32



Digital: Not all screens are calibrated the same, and therefore, colors will appear differently between screens.






































































Physical: When texture is involved, there will be variations in color, character and tone within a product series and between product families.

Champagne Cream, Copper Mine, Ancient Bronze + Jazz Gold: These finishes have slight fading from specific powder coating production. Each luminaire will slightly vary.











RAL Color Upon Request













LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

PROJECT _____
TYPE _____
NOTES _____
QUANTITY _____
DATE _____

Insert custom drawing here or attach with additional pages

