

Slim

Exterior

Cangini & Tucci

Cini & Nils

Fambuena

Letroh

Panzeri

Platek

Ole

Side

UnoNoveSette

Aria

Icone

Linea Zero

Milan

Prolicht


Quasar

Tunto

Knickboker

Studio Zaneen

Platek



SLIM collection

bollard

ARCHITECTURAL EXTERIOR LIGHTING



ARCHITECTURAL EXTERIOR LIGHTING

SLIM bollard



SLIM bollard

ARCHITECTURAL EXTERIOR LIGHTING

Family of stalks from clean, elegant design and a thickness of just 36 mm, Slim is a stalk in discrete forms that can also be installed close to different walls, with no encumbrance. A set of rectangles composes the

wicket, with a diffuser on the same plane of the body completely flush. Available in two heights and with mono and bi-directional emission, it is suitable for walkways and paths of parks and gardens.


ARCHITECTURAL EXTERIOR LIGHTING



ARCHITECTURAL EXTERIOR LIGHTING

ARCHITECTURAL EXTERIOR LIGHTING

SLIM bollard

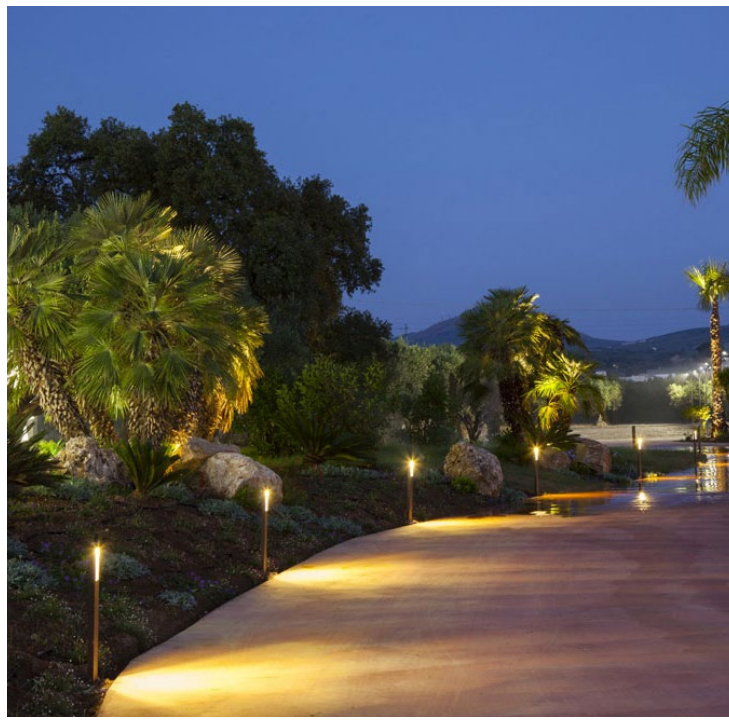

SLIM bollard

ARCHITECTURAL EXTERIOR LIGHTING



ARCHITECTURAL EXTERIOR LIGHTING

ARCHITECTURAL EXTERIOR LIGHTING

SLIM bollard



ARCHITECTURAL EXTERIOR LIGHTING

SLIM bollard



ARCHITECTURAL EXTERIOR LIGHTING



SLIM bollard



ARCHITECTURAL EXTERIOR LIGHTING

SLIM bollard



SLIM bollard


ARCHITECTURAL EXTERIOR LIGHTING

ARCHITECTURAL EXTERIOR LIGHTING



SLIM collection

SLIM bollard 500



IP65
IK 08

5 mm serigraphed
extra-clear glass

h. 500 mm | 19 11/16"

SLIM bollard 800



IP65
IK 08

5 mm serigraphed
extra-clear glass

h. 800 mm | 31 1/2"

standard finishes



.06 grey



.08 anthracite




.09 bronze

on request finishes



.01 black



.02 white



.07 corten



Lighting data

SLIM lighting post

WHITE LED

→ h. 500 mm | 19 11/16"

→ h. 800 mm | 31 1/2"

4000K CRI>80 120/277V



8,8W | 540 lm
1 opening



8,8W | 540 lm
1 opening

3000K / 4000K

→ h. 500 mm | 19 11/16"

→ h. 800 mm | 31 1/2"



8.8 W | 600 lm
2 openings



8.8 W | 600 lm
2 openings

