

## SUPER-G SLIM 65 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____



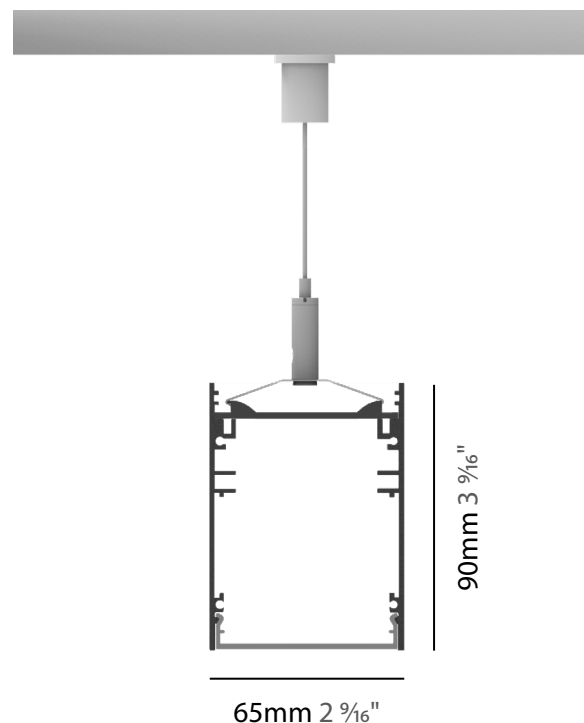
In combination with a white base plate, the white internal reflector creates a perfect mixing chamber. This creates a homogeneous light pattern without individually visible LED dots.

### ARCHITECTURAL | SUPER-G SLIM 65

With a width of only 65mm, SUPER-G SLIM forms elegant, dynamically flowing lines of light in the room. The pendant LED profile impresses with flexible configuration options consisting of curves and straight elements that can be seamlessly connected. This system gives a high degree of freedom in the design of unique lighting concepts. The creative use of color for the housing, supply cable and canopy, different diffusers and an optional indirect light component allow a wide range of design options. Direct and indirect lighting can be switched separately.



### SYSTEM PROFILE



A

## SUPER-G SLIM 65 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT \_\_\_\_\_  
 TYPE \_\_\_\_\_  
 NOTES \_\_\_\_\_  
 QUANTITY \_\_\_\_\_  
 DATE \_\_\_\_\_

### SYSTEM GUIDE

To make your product selection and complete system specification, proceed with the following:  
 review system options, create your system code in the field below and include your quantity.  
 For the inserts, use the field beside each product name.  
 Submit to quotes@zaneen.com to receive a formal BOM and finalized model numbers.

UPON REQUEST  
 Additional Options \_\_\_\_\_  
 Rico Reflector in Straights \_\_\_\_\_  
 Color Temperature \_\_\_\_\_  
 RGB-W/Tunable \_\_\_\_\_  
 Lumen Output \_\_\_\_\_  
 CRI \_\_\_\_\_

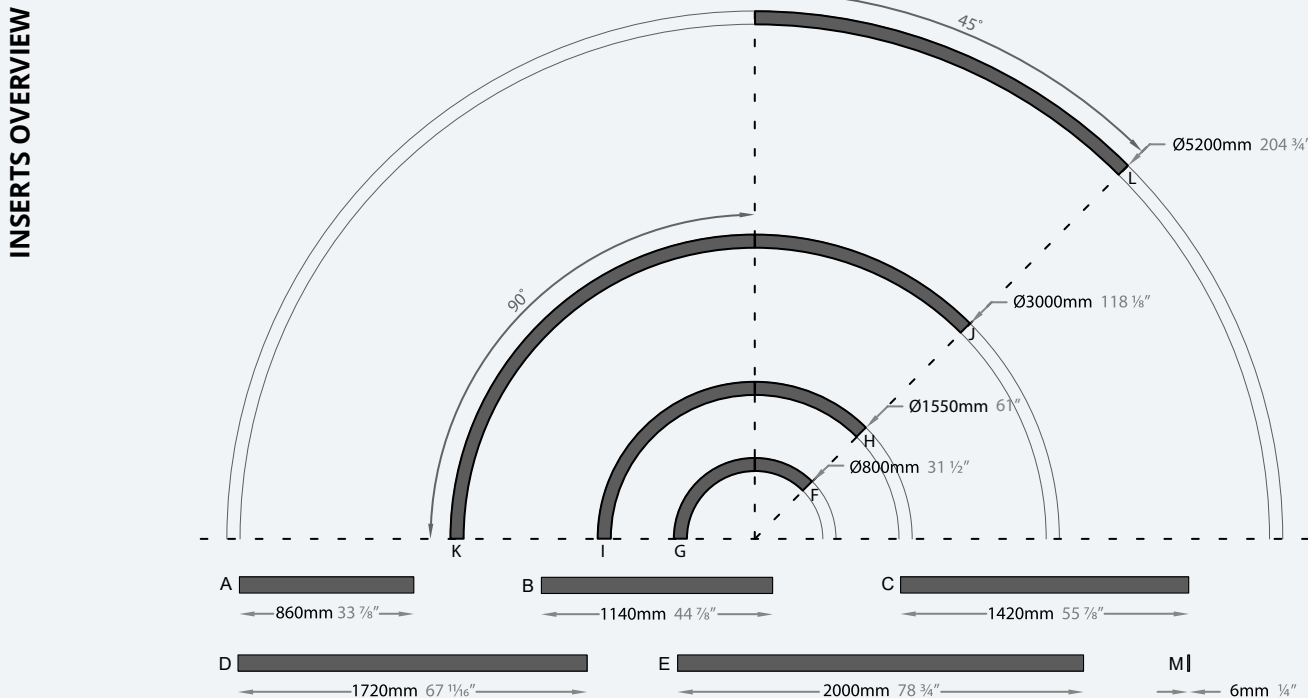


EXAMPLE A3SGS65-SUS-SYS-UNV-DN-01-01-2M

**SYSTEM BUILD CODE: A3SGS65-SUS-SYS-** **qty**

ELECTRICAL	Voltage	Dimming	Circuit
	<b>UNV</b> - 120/277V	<b>DN</b> - Non Dim	<b>EMCIR</b> - Emergency Circuit
	<b>120</b> - 120V	<b>DP</b> - Phase Dim (Triac/ELV, 100-1%)	<b>MC</b> - Multiple Circuits
	<b>347</b> - 347V	<b>DV</b> - 0-10V (100-1%) <b>DD</b> - DALI (100-1%)	

PHYSICAL	Finishes	Cable Length
	End Cap  Installation Clip  Power Feed  (28 colors)  See page 10 for color options and use 2 digit numbers to indicate your choices	<b>2M</b> - 2000mm <b>6M</b> - 6000mm <b>XM</b> - Custom (Upon Request)



## SUPER-G SLIM 65 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT
TYPE
NOTES
QUANTITY
DATE

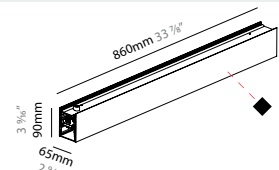
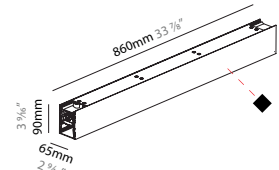
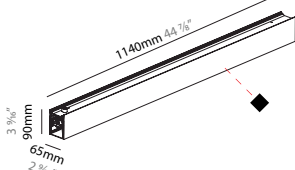
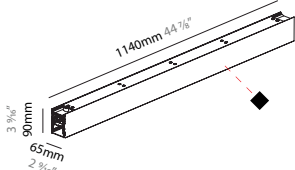
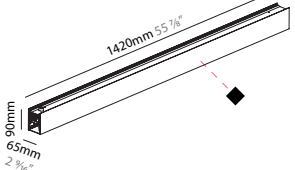
INSERTS

### STRAIGHT

INSERT BUILD CODE EXAMPLE:  
A300082-DN-27K-01-OP

FINISHES OPTIONS:

See page 10 for color options and use 2 digit numbers to indicate your choices

STRAIGHT 860 DIRECT - A	A300082-				qty	
Wattage: 19.5W	Dimming	CCT - 90 CRI	Finish	Diffuser	Delivered Lumen (lm)	
	<b>DN</b> - Non Dim	<b>27K</b> - 2700K	◆ ____ (28 colors)	<b>OP</b> - Opal <b>MP</b> - Microprism	2700K	2482
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K			3000K	2542
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K			3500K	2640
		<b>40K</b> - 4000K			4000K	2693
STRAIGHT 860 DIR/IND - A	A300083-				qty	
Wattage: 29.3W	Dimming	CCT - Direct	CCT - Indirect	Finish	Diffuser	Delivered Lumen (lm)
	<b>DN</b> - Non Dim	<b>27K</b> - 2700K	<b>27K</b> - 2700K	◆ ____ (28 colors)	<b>OP</b> - Opal <b>MP</b> - Microprism	IND 2700K 3000K 3500K 4000K
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K	<b>30K</b> - 3000K			2700K 3786 3616 3858 3893
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K	<b>35K</b> - 3500K			3000K 3847 3678 3920 3954
		<b>40K</b> - 4000K	<b>40K</b> - 4000K			3500K 3920 3754 3992 4026
						4000K 4000 3831 4073 4108
STRAIGHT 1140 DIRECT - B	A30597-				qty	
Wattage: 26W	Dimming	CCT - 90 CRI	Finish	Diffuser	Delivered Lumen (lm)	
	<b>DN</b> - Non Dim	<b>27K</b> - 2700K	◆ ____ (28 colors)	<b>OP</b> - Opal <b>MP</b> - Microprism	2700K	3309
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K			3000K	3390
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K			3500K	3520
		<b>40K</b> - 4000K			4000K	3591
STRAIGHT 1140 DIR/IND - B	A300084-				qty	
Wattage: 39.1W	Dimming	CCT - Direct	CCT - Indirect	Finish	Diffuser	Delivered Lumen (lm)
	<b>DN</b> - Non Dim	<b>27K</b> - 2700K	<b>27K</b> - 2700K	◆ ____ (28 colors)	<b>OP</b> - Opal <b>MP</b> - Microprism	IND 2700K 3000K 3500K 4000K
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K	<b>30K</b> - 3000K			2700K 5047 4822 5145 5191
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K	<b>35K</b> - 3500K			3000K 5129 4903 5226 5273
		<b>40K</b> - 4000K	<b>40K</b> - 4000K			3500K 5227 5006 5322 5367
						4000K 5334 5108 5431 5477
STRAIGHT 1420 DIRECT - C	A300085-				qty	
Wattage: 32.6W	Dimming	CCT - 90 CRI	Finish	Diffuser	Delivered Lumen (lm)	
	<b>DN</b> - Non Dim	<b>27K</b> - 2700K	◆ ____ (28 colors)	<b>OP</b> - Opal <b>MP</b> - Microprism	2700K	4137
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K			3000K	4237
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K			3500K	4400
		<b>40K</b> - 4000K			4000K	4489

## SUPER-G SLIM 65 SUSPENSION SYSTEM SPECIFICATION SHEET

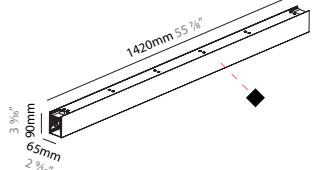
PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

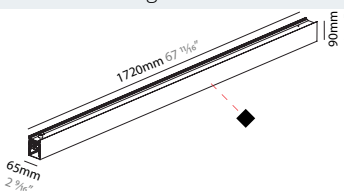
INSERTS

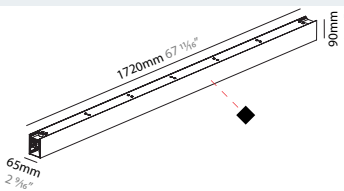
### STRAIGHT

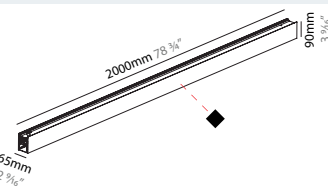
#### FINISHES OPTIONS:

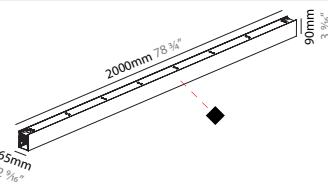
See page 10 for color options and use 2 digit numbers to indicate your choices

STRAIGHT 1420 DIR/IND - C	A300086-						qty				
Wattage: 48.8W	Dimming	CCT - Direct	CCT - Indirect	Finish	Diffuser	Delivered Lumen (lm)					
	<b>DN</b> - Non Dim	<b>27K</b> - 2700K	<b>27K</b> - 2700K	◆ _____ (28 colors)	<b>OP</b> - Opal <b>MP</b> - Microprism	IND	2700K	3000K	3500K	4000K	
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K	<b>30K</b> - 3000K			DIR	2700K	6309	6027	6431	6488
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K	<b>35K</b> - 3500K			3000K	6412	6129	6533	6591	
	<b>40K</b> - 4000K	<b>40K</b> - 4000K	3500K			6534	6257	6653	6709		
						4000K	6667	6385	6789	6846	

STRAIGHT 1720 DIRECT - D	A300087-						qty
Wattage: 39.1W	Dimming	CCT - 90 CRI	Finish	Diffuser	Delivered Lumen (lm)		
	<b>DN</b> - Non Dim	<b>27K</b> - 2700K	◆ _____ (28 colors)	<b>OP</b> - Opal <b>MP</b> - Microprism	2700K	4964	
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K	3000K		5085		
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K	3500K		5278		
	<b>40K</b> - 4000K	<b>40K</b> - 4000K	4000K		5386		

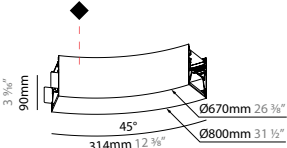
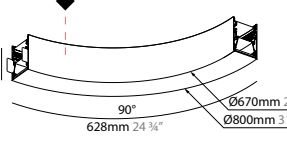
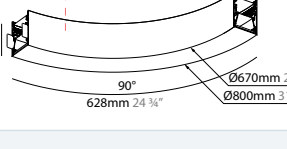
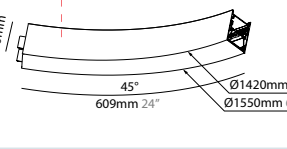
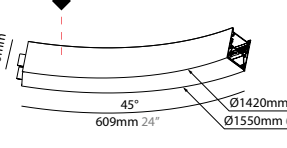
STRAIGHT 1720 DIR/IND - D	A300088-						qty				
Wattage: 58.6W	Dimming	CCT - Direct	CCT - Indirect	Finish	Diffuser	Delivered Lumen (lm)					
	<b>DN</b> - Non Dim	<b>27K</b> - 2700K	<b>27K</b> - 2700K	◆ _____ (28 colors)	<b>OP</b> - Opal <b>MP</b> - Microprism	IND	2700K	3000K	3500K	4000K	
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K	<b>30K</b> - 3000K			DIR	2700K	7571	7232	7717	7786
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K	<b>35K</b> - 3500K			3000K	7694	7355	7840	7909	
	<b>40K</b> - 4000K	<b>40K</b> - 4000K	3500K			7841	7509	7984	8052		
						4000K	8001	7662	8147	8216	

STRAIGHT 2000 DIRECT - E	A30599-						qty
Wattage: 45.6W	Dimming	CCT - 90 CRI	Finish	Diffuser	Delivered Lumen (lm)		
	<b>DN</b> - Non Dim	<b>27K</b> - 2700K	◆ _____ (28 colors)	<b>OP</b> - Opal <b>MP</b> - Microprism	2700K	5791	
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K	3000K		5932		
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K	3500K		6158		
	<b>40K</b> - 4000K	<b>40K</b> - 4000K	4000K		6284		

STRAIGHT 2000 DIR/IND - E	A300089-						qty				
Wattage: 71.6W	Dimming	CCT - Direct	CCT - Indirect	Finish	Diffuser	Delivered Lumen (lm)					
	<b>DN</b> - Non Dim	<b>27K</b> - 2700K	<b>27K</b> - 2700K	◆ _____ (28 colors)	<b>OP</b> - Opal <b>MP</b> - Microprism	IND	2700K	3000K	3500K	4000K	
	<b>DP</b> - Phase Dim	<b>30K</b> - 3000K	<b>30K</b> - 3000K			DIR	2700K	9254	8802	9448	9540
	<b>DV</b> - 0-10V	<b>35K</b> - 3500K	<b>35K</b> - 3500K			3000K	9397	8945	9591	9683	
	<b>40K</b> - 4000K	<b>40K</b> - 4000K	3500K			9560	9117	9750	9840		
						4000K	9755	9303	9949	10041	

## SUPER-G SLIM 65 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS	CURVES		FINISHES OPTIONS:				See page 10 for color options and use 2 digit numbers to indicate your choices							
	Model	Wattage	Dimming	CCT - 90 CRI	Finish	Diffuser	Delivered Lumen (lm)							
	<b>CURVE 800/45° DIRECT - F</b>	Wattage: 6.5W	<b>A30601-</b>				qty							
			DN - Non Dim	<b>27K</b> - 2700K	◆ _____ (28 colors)	<b>OP</b> - Opal <b>MP</b> - Microprism	2700K	827						
			DP - Phase Dim	<b>30K</b> - 3000K			3000K	847						
			DV - 0-10V	<b>35K</b> - 3500K			3500K	880						
				<b>40K</b> - 4000K			4000K	898						
	<b>CURVE 800/90° DIRECT - G</b>	Wattage: 13W	<b>A30603-</b>				qty							
			DN - Non Dim	<b>27K</b> - 2700K	◆ _____ (28 colors)	<b>OP</b> - Opal <b>MP</b> - Microprism	2700K	1655						
			DP - Phase Dim	<b>30K</b> - 3000K			3000K	1695						
			DV - 0-10V	<b>35K</b> - 3500K			3500K	1759						
				<b>40K</b> - 4000K			4000K	1795						
	<b>CURVE 800/90° DIR/IND - G</b>	Wattage: 19.5W	<b>A300076-</b>				qty							
			DN - Non Dim	<b>27K</b> - 2700K	◆ _____ (28 colors)	<b>OP</b> - Opal <b>MP</b> - Microprism	IND	2700K	3000K	3500K	4000K			
			DP - Phase Dim	<b>30K</b> - 3000K			DIR	2700K	2524	2411	2426	2442		
			DV - 0-10V	<b>35K</b> - 3500K			3000K	2565	2452	2468	2483			
				<b>40K</b> - 4000K			3500K	2614	2503	2518	2533			
					4000K	2667	2554	2570	2585					
		<b>CURVE 1550/45° DIRECT - H</b>	Wattage: 13W	<b>A30605-</b>				qty						
				DN - Non Dim	<b>27K</b> - 2700K	◆ _____ (28 colors)	<b>OP</b> - Opal <b>MP</b> - Microprism	2700K	1655					
				DP - Phase Dim	<b>30K</b> - 3000K			3000K	1695					
				DV - 0-10V	<b>35K</b> - 3500K			3500K	1759					
				<b>40K</b> - 4000K	4000K			1795						
	<b>CURVE 1550/45° DIR/IND - H</b>	Wattage: 19.5W	<b>A300077-</b>				qty							
			DN - Non Dim	<b>27K</b> - 2700K	◆ _____ (28 colors)	<b>OP</b> - Opal <b>MP</b> - Microprism	IND	2700K	3000K	3500K	4000K			
			DP - Phase Dim	<b>30K</b> - 3000K			DIR	2700K	2524	2411	2426	2442		
			DV - 0-10V	<b>35K</b> - 3500K			3000K	2565	2452	2468	2483			
				<b>40K</b> - 4000K			3500K	2614	2503	2518	2533			
					4000K	2667	2554	2570	2585					

## SUPER-G SLIM 65 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

INSERTS	CURVES		FINISHES OPTIONS:				See page 10 for color options and use 2 digit numbers to indicate your choices																												
		<b>CURVE 1550/90° DIRECT - I</b>	<b>A30607-</b>					qty																											
Wattage: 26W		Dimming	CCT - 90 CRI	Finish	Diffuser	Delivered Lumen (lm)																													
<b>DN - Non Dim</b> <b>DP - Phase Dim</b> <b>DV - 0-10V</b>		<b>27K - 2700K</b> <b>30K - 3000K</b> <b>35K - 3500K</b> <b>40K - 4000K</b>	<b>◆</b> _____ (28 colors)	<b>OP - Opal</b> <b>MP - Microprism</b>	2700K    3309 3000K    3390 3500K    3519 4000K    3591																														
	<b>CURVE 1550/90° DIR/IND - I</b>	<b>A300078-</b>					qty																												
	Wattage: 39.1W	Dimming	CCT - Direct	CCT - Indirect	Finish	Diffuser	Delivered Lumen (lm)																												
	<b>DN - Non Dim</b> <b>DP - Phase Dim</b> <b>DV - 0-10V</b>	<b>27K - 2700K</b> <b>30K - 3000K</b> <b>35K - 3500K</b> <b>40K - 4000K</b>	<b>27K - 2700K</b> <b>30K - 3000K</b> <b>35K - 3500K</b> <b>40K - 4000K</b>	<b>◆</b> _____ (28 colors)	<b>OP - Opal</b> <b>MP - Microprism</b>	<table border="1"> <tr> <th>IND</th> <th>2700K</th> <th>3000K</th> <th>3500K</th> <th>4000K</th> </tr> <tr> <td>DIR</td> <td>2700K</td> <td>5047</td> <td>4822</td> <td>4853</td> <td>4884</td> </tr> <tr> <td></td> <td>3000K</td> <td>5129</td> <td>4903</td> <td>4935</td> <td>4966</td> </tr> <tr> <td></td> <td>3500K</td> <td>5227</td> <td>5006</td> <td>5037</td> <td>5067</td> </tr> <tr> <td></td> <td>4000K</td> <td>5334</td> <td>5108</td> <td>5431</td> <td>5170</td> </tr> </table>	IND	2700K	3000K	3500K	4000K	DIR	2700K	5047	4822	4853	4884		3000K	5129	4903	4935	4966		3500K	5227	5006	5037	5067		4000K	5334	5108	5431	5170
	IND	2700K	3000K	3500K	4000K																														
DIR	2700K	5047	4822	4853	4884																														
	3000K	5129	4903	4935	4966																														
	3500K	5227	5006	5037	5067																														
	4000K	5334	5108	5431	5170																														
	<b>CURVE 3000/45° DIRECT - J</b>	<b>A30609-</b>					qty																												
	Wattage: 26W	Dimming	CCT - 90 CRI	Finish	Diffuser	Delivered Lumen (lm)																													
	<b>DN - Non Dim</b> <b>DP - Phase Dim</b> <b>DV - 0-10V</b>	<b>27K - 2700K</b> <b>30K - 3000K</b> <b>35K - 3500K</b> <b>40K - 4000K</b>	<b>◆</b> _____ (28 colors)	<b>OP - Opal</b> <b>MP - Microprism</b>	2700K    3309 3000K    3390 3500K    3520 4000K    3591																														
	<b>CURVE 3000/45° DIR/IND - J</b>	<b>A300079-</b>					qty																												
	Wattage: 39.1W	Dimming	CCT - Direct	CCT - Indirect	Finish	Diffuser	Delivered Lumen (lm)																												
	<b>DN - Non Dim</b> <b>DP - Phase Dim</b> <b>DV - 0-10V</b>	<b>27K - 2700K</b> <b>30K - 3000K</b> <b>35K - 3500K</b> <b>40K - 4000K</b>	<b>27K - 2700K</b> <b>30K - 3000K</b> <b>35K - 3500K</b> <b>40K - 4000K</b>	<b>◆</b> _____ (28 colors)	<b>OP - Opal</b> <b>MP - Microprism</b>	<table border="1"> <tr> <th>IND</th> <th>2700K</th> <th>3000K</th> <th>3500K</th> <th>4000K</th> </tr> <tr> <td>DIR</td> <td>2700K</td> <td>5047</td> <td>4822</td> <td>4853</td> <td>4884</td> </tr> <tr> <td></td> <td>3000K</td> <td>5129</td> <td>4903</td> <td>4935</td> <td>4966</td> </tr> <tr> <td></td> <td>3500K</td> <td>5227</td> <td>5006</td> <td>5037</td> <td>5067</td> </tr> <tr> <td></td> <td>4000K</td> <td>5334</td> <td>5108</td> <td>5431</td> <td>5170</td> </tr> </table>	IND	2700K	3000K	3500K	4000K	DIR	2700K	5047	4822	4853	4884		3000K	5129	4903	4935	4966		3500K	5227	5006	5037	5067		4000K	5334	5108	5431	5170
	IND	2700K	3000K	3500K	4000K																														
DIR	2700K	5047	4822	4853	4884																														
	3000K	5129	4903	4935	4966																														
	3500K	5227	5006	5037	5067																														
	4000K	5334	5108	5431	5170																														
	<b>CURVE 3000/90° DIRECT - K</b>	<b>A30611-</b>					qty																												
	Wattage: 52.1W	Dimming	CCT - 90 CRI	Finish	Diffuser	Delivered Lumen (lm)																													
	<b>DN - Non Dim</b> <b>DP - Phase Dim</b> <b>DV - 0-10V</b>	<b>27K - 2700K</b> <b>30K - 3000K</b> <b>35K - 3500K</b> <b>40K - 4000K</b>	<b>◆</b> _____ (28 colors)	<b>OP - Opal</b> <b>MP - Microprism</b>	2700K    6619 3000K    6780 3500K    7038 4000K    7182																														

## SUPER-G SLIM 65 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

### CURVES

#### FINISHES OPTIONS:

See page 10 for color options and use 2 digit numbers to indicate your choices

INSERTS

CURVE 3000/90° DIR/IND - K	A300080-						qty					
	Wattage: 78.1W	Dimming	CCT - Direct	CCT - Indirect	Finish	Diffuser	Delivered Lumen (lm)					
	DN - Non Dim	27K - 2700K	27K - 2700K	◆ _____ (28 colors)	OP - Opal MP - Microprism	IND	2700K	3000K	3500K	4000K		
	DP - Phase Dim	30K - 3000K	30K - 3000K			DIR	2700K	10095	9643	9706	9768	
	DV - 0-10V	35K - 3500K	35K - 3500K			3000K	10259	9807	9869	9931		
		40K - 4000K	40K - 4000K			3500K	10455	10012	10073	10134		
						4000K	10668	10216	10279	10341		

CURVE 5200/45° DIRECT - L	A30613-				qty		
Wattage: 45.6W	Dimming	CCT - 90 CRI	Finish	Diffuser	Delivered Lumen (lm)		
	DN - Non Dim	27K - 2700K	◆ _____ (28 colors)	OP - Opal MP - Microprism	2700K	5791	
	DP - Phase Dim	30K - 3000K			3000K	5932	
	DV - 0-10V	35K - 3500K			3500K	6158	
		40K - 4000K			4000K	6284	

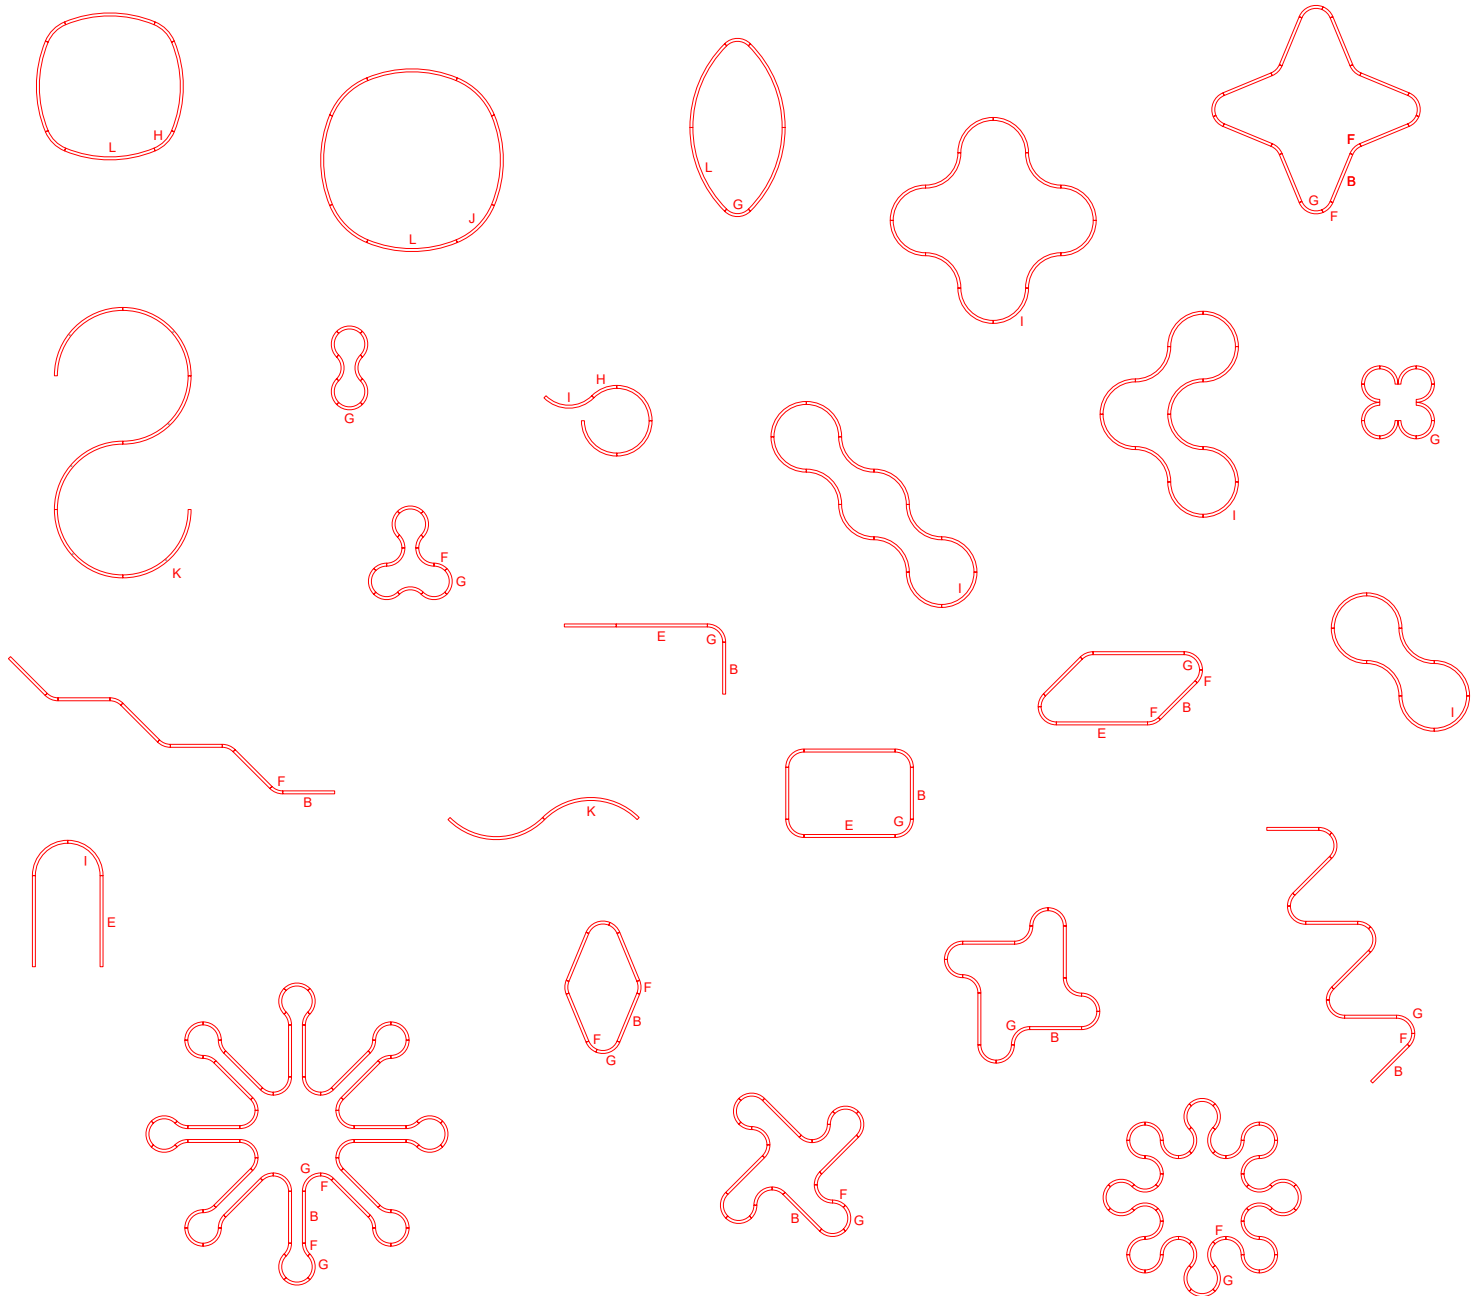
  

CURVE 5200/45° DIR/IND - L	A300081-						qty					
Wattage: 71.6W	Dimming	CCT - Direct	CCT - Indirect	Finish	Diffuser	Delivered Lumen (lm)						
	DN - Non Dim	27K - 2700K	27K - 2700K	◆ _____ (28 colors)	OP - Opal MP - Microprism	IND	2700K	3000K	3500K	4000K		
	DP - Phase Dim	30K - 3000K	30K - 3000K			DIR	2700K	9254	8802	8865	8927	
	DV - 0-10V	35K - 3500K	35K - 3500K			3000K	9397	8945	9008	9070		
		40K - 4000K	40K - 4000K			3500K	3560	9117	9178	9239		
						4000K	9755	9303	9949	9428		

## SUPER-G SLIM 65 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

### DESIGN IDEAS (Circle to select)





## SUPER-G SLIM 65 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT	_____
TYPE	_____
NOTES	_____
QUANTITY	_____
DATE	_____

### SYSTEM SUMMARY

#### System

##### Type

Suspension  
Rated for Dry Locations Ceiling Mounted

##### Approval Status

CSA Certified to CSA and UL Standards

##### Emission

Refer to emission icon beside each light insert and symbol legend for descriptions

##### Efficiency

Acrylic Opal Diffuser (snap-in) lens 46%  
Micro-prismatic Diffuser (snap-in) lens 53%

#### Profile

##### Measurement

w 65mm (2 5/8") x ht. 90mm (3 5/8")

##### Housing

Anodized extruded aluminum profile available per meter and field-cuttable  
Profiles have a maximum length of 3000mm (9' 10 5/8") and joined together with couplers to ensure uniform appearance and easy installation

##### Suspension Lengths

Standard lengths include 2000mm and 6000mm  
Any custom length must be pre-cut on site  
Maximum custom length available is 10000mm

#### Electrical

##### Connections

Luminaries are pre-wired with a factory installed branch circuit wiring and quick-release connectors  
Through wiring is used to connect the luminaries

##### Power Feed

Located 2 inches from one end of the fixture, on top of the profile  
If a different location is required, please specify  
3 Wires - non-dimming or phase dimming  
4 Wires - two circuits of non-dimming or phase dimming  
5 Wires - 0-10V dimming or dali dimming

##### LED Driver

Integrated with inserts  
Electronic Class 2 driver, Universal 120V/277V  
Non-Dimming Driver, Phase Dimming Driver, and 0-10V Dimming Driver (10-100%)  
Consult factory for driver cutsheet  
If a different driver is required, please specify

##### Emergency Inverter Compatible

To be installed remotely, and provided by others  
It can be located up to 250m away from the fixture

Emergency circuit wiring is available upon request (Isolated track with dedicated driver used for emergency circuit will connect to emergency battery pack - supplied by others)

#### General

##### Features

All LED-Boards are protected from electrostatic discharge (ESD) and direct contact with the LED by a highly transparent acrylic glass.

In combination with a white base plate, the white internal reflector creates a perfect mixing chamber. This creates a homogeneous light pattern without individually visible LED dots.

The range of straight and differently curved sections gives a particularly high degree of freedom in the design of unique lighting concepts.

##### Custom Requests and Additional Options

Availability depends on insert, system, and configuration  
Must consult factory and allow up to 5 business days for an answer

Color temperature, Special CRI, RGB-W, tunable, special diffuser, light inserts with different outputs, light inserts on different circuits

In addition to the standard radii, sections can be manufactured with individual bends starting from 350mm radius

##### Configuration

Consult factory with drawings

\*Shop drawings provided upon receiving purchase order

#### Warranty

ZANEEN provides a limited warranty from date of purchase to original purchaser

**LED Inserts:** 5 year tested for 50,000 hours at 70% lumen output (L70)

**LED Driver:** 5 year

**Non-Electrical Components:** 1 year

\*Check boxes to complete specification order and submit to quotes@zaneen.com to receive a formal BOM and a finalized model number

\*In a constant effort to supply the best product, we reserve the right to change specifications or materials without notice. The most recent specification sheets are found at zaneen.com

## SUPER-G SLIM 65 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT \_\_\_\_\_  
 TYPE \_\_\_\_\_  
 NOTES \_\_\_\_\_  
 QUANTITY \_\_\_\_\_  
 DATE \_\_\_\_\_

### FINISH COLORS




Sparkling Silver - 01



Black Velvet - 02



Crystal White - 03



Creamy - 04



Hampton Bay - 05



Urban Forest - 07



In the Army - 08



Rusty Angel - 09



Fade to Grey - 12



Mysterious Grey - 13



Lost Dream - 15



Purple Sky - 16



Fresh Oh - 17



Funky P - 18



Kissing Aphrodite - 19




Poseidon's Paradise - 20




Blue Sky - 21



Spring Green - 22



Mellow Yellow - 23



Golden Heart - 24



Gun Metal - 25



Champagne Cream - 26



Copper Mine - 27



Ancient Bronze - 28




Jazz Gold - 29



Olive Breeze - 30



Moonlight Silver - 31



Rosewood Red - 32



### CABLE COLORS (UPON REQUEST)

- White
- Black
- Orange
- Red

**Digital:** Not all screens are calibrated the same, and therefore, colors will appear differently between screens.

**Physical:** When texture is involved, there will be variations in color, character and tone within a product series and between product families.

**Gun Metal:** No Gun Metal finish is alike. It combines a mixture of transparent and black color particles which ensures a highly individual effect and no luminaire being identical.

**Champagne Cream, Copper Mine, Ancient Bronze + Jazz Gold:** These finishes have slight fading from specific powder coating production. Each luminaire will slightly vary.

RAL Color Upon Request



### LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

### IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

### IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)

### WIRING DIAGRAMS

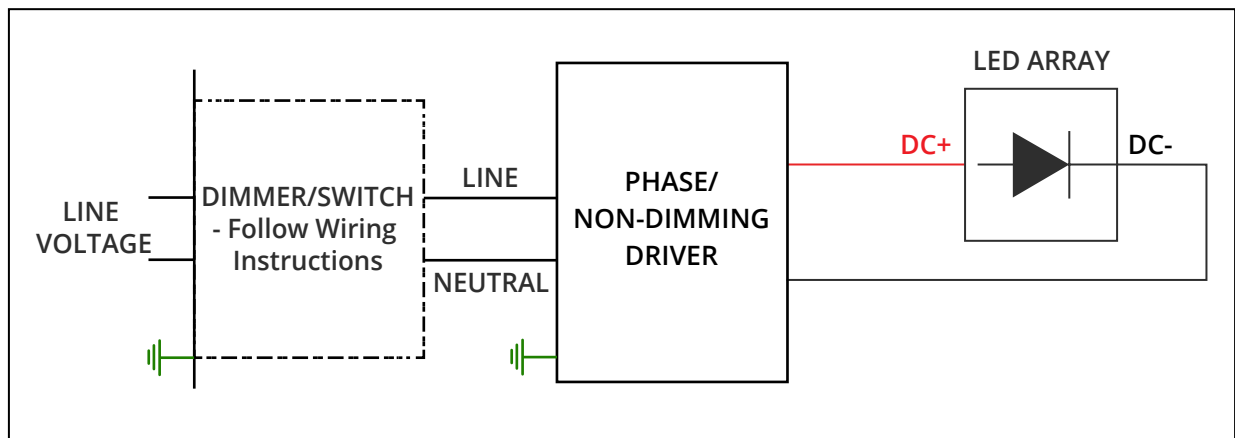
ALL ZANEEN FIXTURES ARE MANUFACTURED TO NORTH AMERICAN ELECTRICAL STANDARDS

Post Sales Support  
HQ 1-800-388-3382 X 625 support@zaneen.com

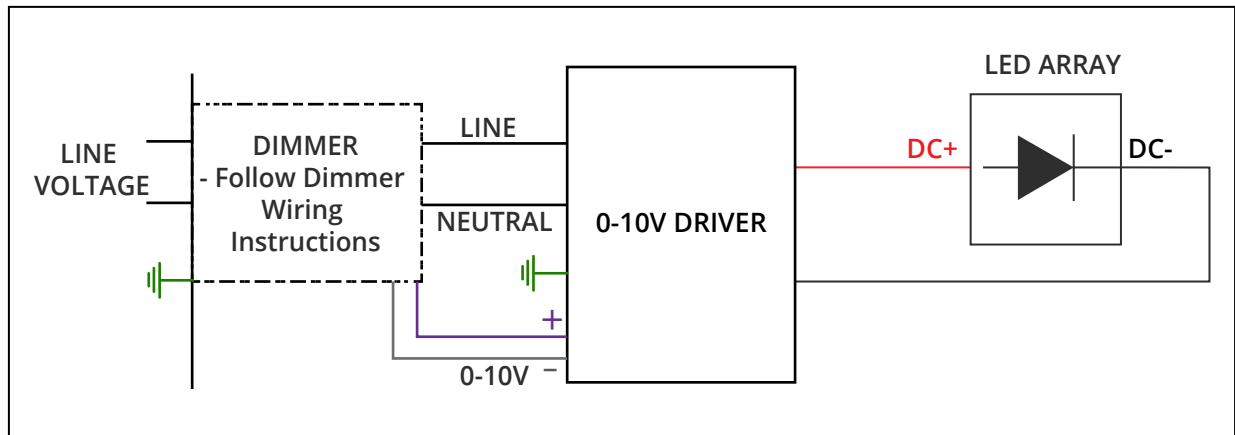
#### IMPORTANT

- Do NOT connect directly to line voltage
- There is a minimum and maximum load per driver (See fixture and driver specifications).
- Fixture MUST be connected to LED driver, prior to turning power on

#### PHASE/NON-DIMMING WIRING DIAGRAM



#### 0-10V DIMMING WIRING DIAGRAM



## SUPER-G SLIM 65 SUSPENSION SYSTEM SPECIFICATION SHEET

PROJECT \_\_\_\_\_  
TYPE \_\_\_\_\_  
NOTES \_\_\_\_\_  
QUANTITY \_\_\_\_\_  
DATE \_\_\_\_\_

Insert custom drawing here or attach with additional pages

