

## TRINITY MODULAR SYSTEM SPECIFICATION SHEET

PROJECT \_\_\_\_\_

TYPE \_\_\_\_\_

NOTES \_\_\_\_\_

QUANTITY \_\_\_\_\_

DATE \_\_\_\_\_

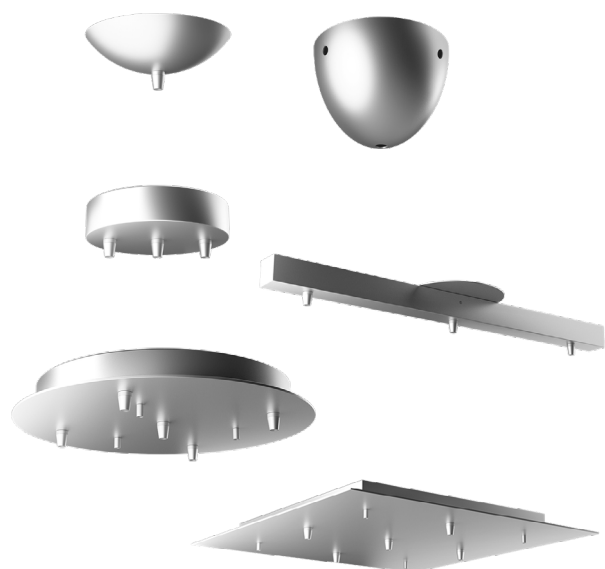


### DESIGN | TRINITY

TRINITY is a collection that offers a complete set of hand-blown ribbed glass pendants, thoughtfully designed in three distinct shapes for versatile and elegant clustering. The designs include the sleek cylinder, DAO, the classic round, FIRENZE PALLA, and the graceful oval, FIRENZE CIPOLLA. Each pendant exudes a timeless appeal, making them a perfect fit for hospitality or residential settings. With the flexibility to be clustered in groups, the customizable canopy system enhances their visual impact. These traditional blown glass pendants bring a refined touch to any space, combining artisanal craftsmanship with modern functionality.



### SYSTEM OVERVIEW



TRINITY MODULAR SYSTEM  
SPECIFICATION SHEET

PROJECT

TYPE

NOTES


QUANTITY

DATE

SYSTEM GUIDE

To make your product selection and complete system specification, proceed with the following:  
review system options, create your system code in the field below and include your quantity.  
For the canopies/pendants, use the field beside each product name.  
Submit to [quotes@zaneen.com](mailto:quotes@zaneen.com) to receive a formal BOM and finalized model numbers.

EXAMPLE D14TRINITY-MOD-SYS-120-DN



UPON REQUEST  
Additional Options

Cable Length

Custom Canopy

SYSTEM BUILD CODE: D14TRINITY-MOD-SYS-

qty


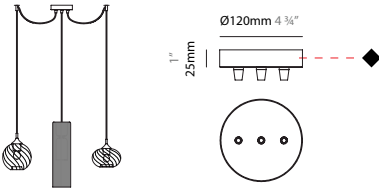
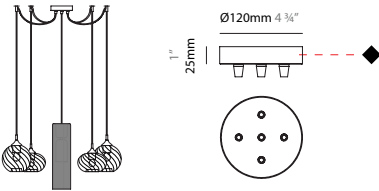
ELECTRICAL

Voltage	Dimming
120 - 120V	DN - Non Dim
277 - 277V (Upon request)	

MODULES

CANOPY

BUILD CODE EXAMPLE: D149001-BLK  
FINISHES OPTIONS: See page 7 for color options and use 3 digit letters to indicate your choices

ROUND - 1 HOLE	D149001-	qty
	Finish ◆ _____ (6 colors)	
ROUND - 3 HOLES	D149006-	qty
	Finish ◆ _____ (6 colors)	
ROUND - 5 HOLES	D149007-	qty
	Finish ◆ _____ (6 colors)	

PROJECT

TYPE

NOTES

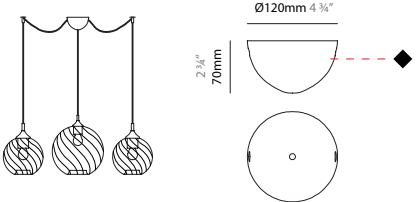
QUANTITY

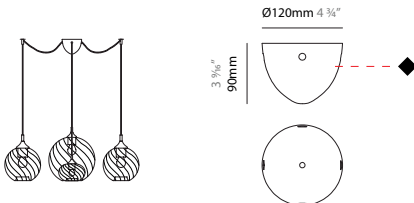
DATE

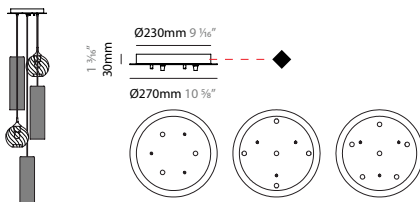
MODULES

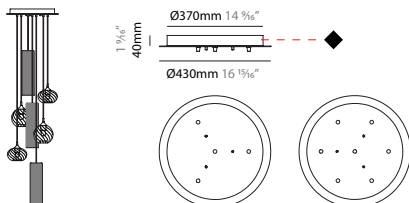
CANOPY

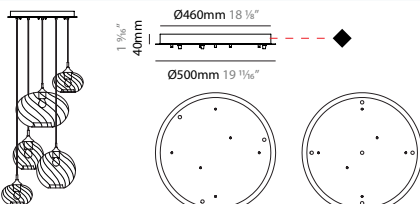
FINISHES OPTIONS:  
See page 7 for color options and use 3 digit letters to indicate your choices

<div>ROUND - 2 EXTERNAL HOLES + 1 CENTRAL</div> <div></div>	<div>D149008-</div> <div>qty</div>
<div>Finish</div> <div>◆ _____</div> <div>(6 colors)</div>	

<div>ROUND - 4 EXTERNAL HOLES + 1 CENTRAL</div> <div></div>	<div>D149009-</div> <div>qty</div>
<div>Finish</div> <div>◆ _____</div> <div>(6 colors)</div>	

<div>ROUND - FOR 3/5/6 LIGHTS</div> <div></div>	<div>D149014-</div> <div>qty</div>
<div>Finish</div> <div>◆ _____</div> <div>(6 colors)</div>	

<div>ROUND - FOR 3/4/5/6/7/8/9/10/11 LIGHTS</div> <div></div>	<div>D149015-</div> <div>qty</div>
<div>Finish</div> <div>◆ _____</div> <div>(6 colors)</div>	

<div>ROUND - FOR 3/4/5 LIGHTS</div> <div></div>	<div>D149016-</div> <div>qty</div>
<div>Finish</div> <div>◆ _____</div> <div>(6 colors)</div>	

PROJECT

TYPE

NOTES

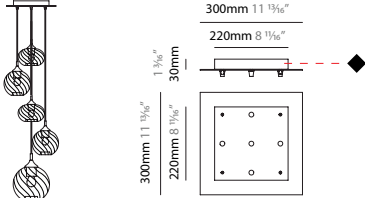
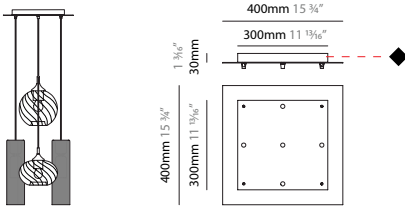
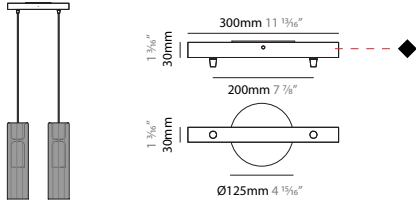
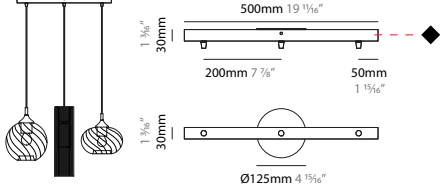
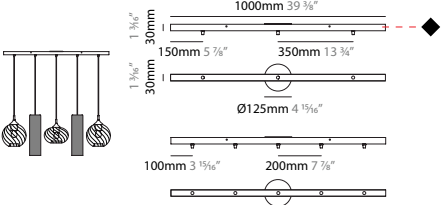
QUANTITY

DATE

MODULES

CANOPY

FINISHES OPTIONS:  
See page 7 for color options and use 3 digit letters to indicate your choices

	<div><div>SQUARE - FOR 5 LIGHTS - 300</div><div></div></div>	<div>D149017-</div> <div>qty</div> <div>Finish</div> <div>◆ _____</div> <div>(6 colors)</div>
	<div><div>SQUARE - FOR 5 LIGHTS - 400</div><div></div></div>	<div>D149018-</div> <div>qty</div> <div>Finish</div> <div>◆ _____</div> <div>(6 colors)</div>
	<div><div>LINEAR - FOR 2 LIGHTS</div><div></div></div>	<div>D149019-</div> <div>qty</div> <div>Finish</div> <div>◆ _____</div> <div>(6 colors)</div>
	<div><div>LINEAR - FOR 3 LIGHTS</div><div></div></div>	<div>D149020-</div> <div>qty</div> <div>Finish</div> <div>◆ _____</div> <div>(6 colors)</div>
	<div><div>LINEAR - FOR 3/5 LIGHTS</div><div></div></div>	<div>D149021-</div> <div>qty</div> <div>Finish</div> <div>◆ _____</div> <div>(6 colors)</div>

PROJECT

TYPE

NOTES

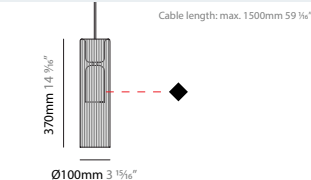
QUANTITY

DATE

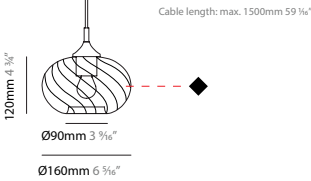
PENDANTS

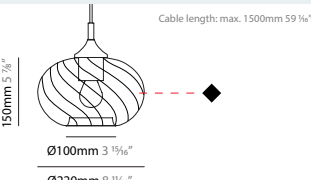
DAO

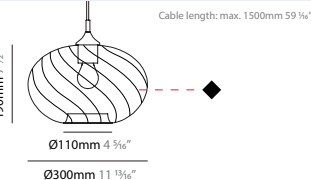
FINISHES OPTIONS:  
See page 7 for color options and use 3 digit letters to indicate your choices

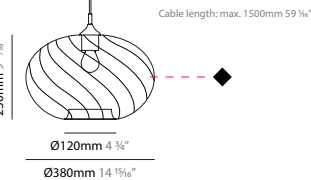
<b>DAO Ø100</b>	<b>D141277-</b>	qty
Wattage: 8W	Finish	Lamp Base
	◆ _____ (9 colors)	E26 Bulb not included.

FIRENZE CIPOLLA

<b>FIRENZE CIPOLLA Ø160</b>	<b>D141088-</b>	qty
Wattage: 4W	Finish	Lamp Base
	◆ _____ (9 colors)	E12 Bulb not included.

<b>FIRENZE CIPOLLA Ø220</b>	<b>D141089-</b>	qty
Wattage: 8W	Finish	Lamp Base
	◆ _____ (9 colors)	E26 Bulb not included.

<b>FIRENZE CIPOLLA Ø300</b>	<b>D141090-</b>	qty
Wattage: 8W	Finish	Lamp Base
	◆ _____ (9 colors)	E26 Bulb not included.

<b>FIRENZE CIPOLLA Ø380</b>	<b>D141091-</b>	qty
Wattage: 8W	Finish	Lamp Base
	◆ _____ (9 colors)	E26 Bulb not included.

PROJECT

TYPE

NOTES





QUANTITY

DATE

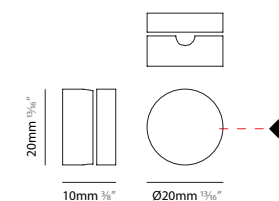
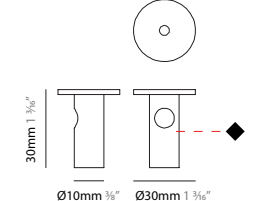
PENDANTS

FIRENZE PALLA

FINISHES OPTIONS:  
See page 7 for color options and use 3 digit letters to indicate your choices

FIRENZE PALLA Ø160	D141106-	qty
Wattage: 4W 	Finish ◆ _____ (9 colors)	Lamp Base  E12 Bulb not included.
FIRENZE PALLA Ø220	D141107-	qty
Wattage: 8W 	Finish ◆ _____ (9 colors)	Lamp Base  E26 Bulb not included.
FIRENZE PALLA Ø280	D141108-	qty
Wattage: 8W 	Finish ◆ _____ (9 colors)	Lamp Base  E26 Bulb not included.
FIRENZE PALLA Ø380	D141109-	qty
Wattage: 8W 	Finish ◆ _____ (9 colors)	Lamp Base  E26 Bulb not included.

ACCESSORIES

WALL STUD CABLE SPACER	D149012-	qty	CABLE SPACER	D149013-	qty
	Finish ◆ _____ (6 colors)			Finish ◆ _____ (6 colors)	

PROJECT

TYPE


NOTES

QUANTITY

DATE

#### FINISH COLORS - CANOPY

Black - **BLK**



Brushed Steel - **BST**



Chrome - **CHR**




Gold Leaf - **GLF**



Silver Leaf - **SLF**



White - **WHI**



#### FINISH COLORS - FIXTURE

Amber - **AMB**



Green - **GRN**



Pink - **PNK**



Ruby - **RUB**



Sky Blue - **SKB**



Smoke - **SMK**



Satin White - **SWH**



Tobacco - **TOB**



Transparent - **TRA**



## TRINITY MODULAR SYSTEM

### SPECIFICATION SHEET

PROJECT \_\_\_\_\_

TYPE \_\_\_\_\_

NOTES \_\_\_\_\_

QUANTITY \_\_\_\_\_

DATE \_\_\_\_\_

### LEGEND

	floor-mounted		pivotal		special LED (upon request) RGB, RGBW, tunable, gold+, meat+, art+, fashion+
	wall and ceiling: recessed and surface mounted		rotating		warm dim / natural dimming LED
	ceiling-mounted and wall-mounted		illuminate tilted		rechargeable battery powered
	wall-mounted		color of suspension cable		fixture with natural vivid LED (upon request)
	omni-directional light distribution		length of suspension cable		color rendering index
	direct light distribution		reflector degree selection		color temperature
	direct/indirect light distribution		super spot		lumen (luminous flux)
	indirect light distribution		lens		efficacy (lumens per watt)
	asymmetric light distribution		lens pack		Unified Glare Rating (UGR) range from 5-40
	aura light distribution		shine ring		marine grade (AISI 316 stainless steel)
	round wall or ceiling cut-out		integrated shine ring with diffuser		walk on
	square wall or ceiling cut-out		free individual colors 01-29		drive on
	the supplied jig specifies the cutout dimensions		individual colors: 00 (free of charge), 01-25 (extra charge)		Dark Sky Compliance
	minimum distance (meters) lamp - object		luminaire part to be colored (F1)		Americans with Disabilities Act (less than 4" off the wall located between 27"-84" from floor)
	recessed depth		luminaire part to be colored (F2)		lamp protected against explosion
	ceiling thickness in mm		luminaire part to be colored (F3)		blown glass using traditional methods by master glass blower
	ceiling thickness selection		luminaire part to be colored (F4)		acoustic material
	dimmmable DP (phase), DV (0-10V), DD (dali), DS (step-dim)		luminaire part to be colored (F5)		protection class I, protection insulation
	included or excluded LED driver/transformer/ control gear		color of 3-circuit adaptor		protection class II, protection insulation
	separately switchable		indirect diffuser		ETL Certified to UL and CSA Standards
	sensor		direct diffuser		UL Certified to UL and CSA Standards
	remote control		ball-proof (upon request)		CSA Certified to UL and CSA Standards
	available upon request		accessory		Certified for North American Standards

### IP RATING

	protected against ingress of solid bodies greater than 12.5mm (finger)
	protected against ingress of solid bodies greater than 2.5mm protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) no protection against the ingress of moisture
	protected against ingress of solid bodies greater than 1mm (wire) protected against sprays of water up to 60 degrees from the vertical (rain)
	protected against ingress of solid bodies greater than 1mm (wire) protected against water splashed from all directions
	protected against limited ingress of dust (wet rooms/covered outdoor areas) protected against water splashed from all directions
	protected against ingress of dust protected against jets of water
	protected against ingress of dust protected against powerful jets of water or heavy seas
	protected against ingress of dust protected against immersion of water between 15cm - 1m for 30 minutes
	protected against ingress of dust protected against immersion of water under pressure for long periods

### IK RATING

	protected against 0.14 joules impact (equivalent to 0.25kg mass dropped from 56mm above the surface)
	protected against 0.2 joules impact (equivalent to 0.25kg mass dropped from 80mm above the surface)
	protected against 0.35 joules impact (equivalent to 0.25kg mass dropped from 140mm above the surface)
	protected against 0.5 joules impact (equivalent to 0.25kg mass dropped from 200mm above the surface)
	protected against 0.7 joules impact (equivalent to 0.25kg mass dropped from 280mm above the surface)
	protected against 1 joules impact (equivalent to 0.25kg mass dropped from 400mm above the surface)
	protected against 2 joules impact (equivalent to 0.5kg mass dropped from 400mm above the surface)
	protected against 5 joules impact (equivalent to 1.7kg mass dropped from 300mm above the surface)
	protected against 10 joules impact (equivalent to 5.0kg mass dropped from 200mm above the surface)
	protected against 20 joules impact (equivalent to 5.0kg mass dropped from 400mm above the surface)





**TRINITY** MODULAR SYSTEM  
SPECIFICATION SHEET

PROJECT

TYPE

NOTES

QUANTITY

DATE

Insert custom drawing here or attach with additional pages

