

DIXIT RA8 RECESSED
INSTALLATION GUIDE

ZANEEN®

Certified for
North
American
Standards



IP 65



ITEM	VOLTAGE	TYPE AND POWER OF BULB	DIAMETER OF THE HOLE	HEIGHT
E56103 -	350 mA	LED 12 W	70 mm	81 mm

IP 66



CLASS 2



Luminaires suitable for mounting on normally flammable surfaces



Never cover the luminaire with any kind of insulating material

INSTALLATION

Keep a min. 50 mm. distance between the max. overall dimensions of the fixture and the inner surfaces inside the false ceiling, as from picture 1.

Use a safety transformer for LED constant current:

• 350 mA 12 W - Vout max 60 V


Pay attention to the polarity (+ -)

Place the transformer in an area protected from water and humidity.


Install the fitting following the instructions for pictures 2-3. Keep this directive!

All fittings must be connected by a qualified electrician. Bringing the modifications as well as installing / using the product other than required, involves the loss of technical/mechanical features, consequently voiding the warranty, and we do not assume any liability.


1

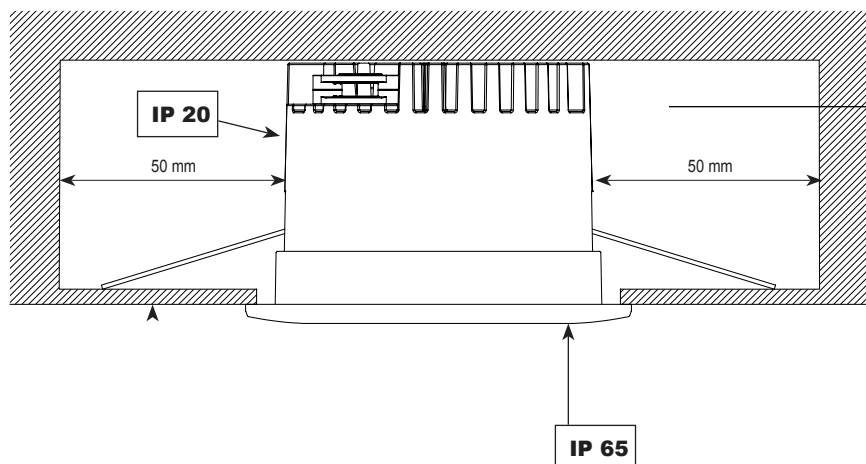


IP 65 rated remodel housing included

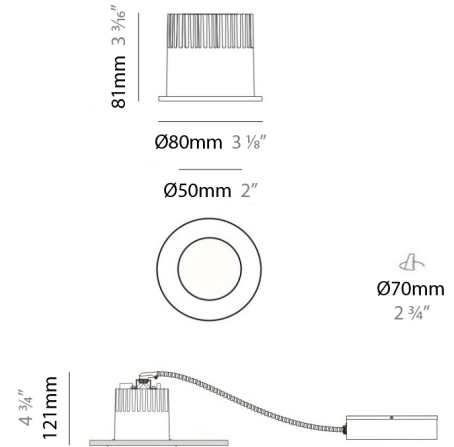

2

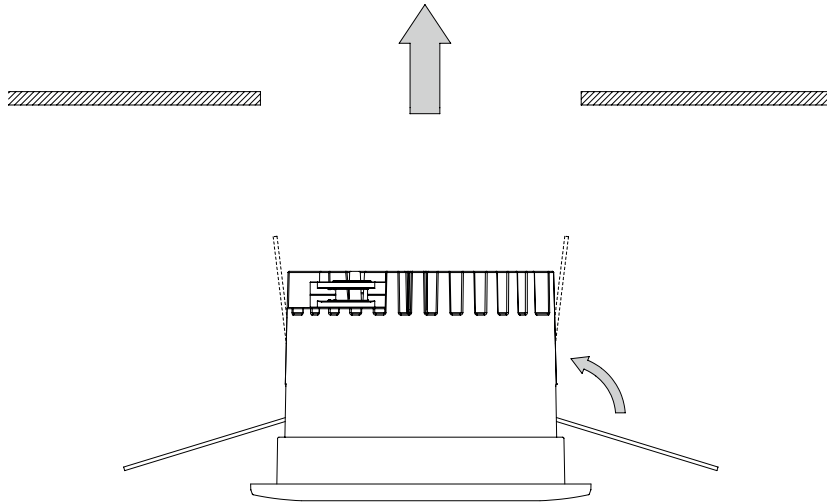

3

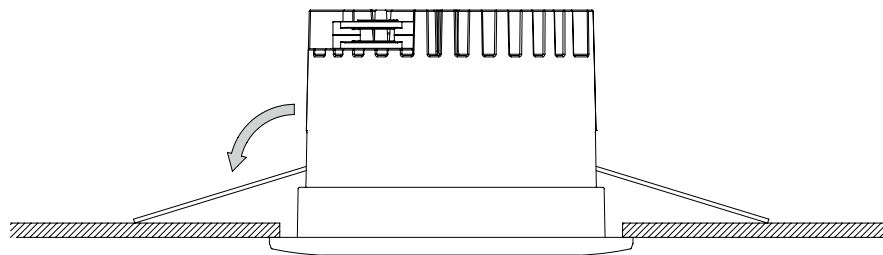

IMPORTANT

Post Sales Support HQ 1-800-388-3382 support@zaneen.com



EN

- Installation and electrification must be carried out by a qualified electrician, only.
- Observe all relevant building codes and regulations.
- Prior to installation or repair: disconnect power; it is the installer's responsibility to ensure for all electrical, mechanical and thermal compatibility.
- The LED light source contained in this fixture shall only be replaced by Zaneen, or a person approved by Zaneen.
- Recommendations: Keep the instruction sheet(s) in the event of maintenance and/or disassembly.

Access detailed specification sheets and the warranty policy on the product page at zaneen.com.

FR

- L'installation et l'électrification doivent être effectuées uniquement par un électricien qualifié.
- Respectez tous les codes du bâtiment et réglementations en vigueur.
- Avant l'installation ou la réparation: débranchez l'alimentation électrique; Il incombe à l'installateur des'assurer de la compatibilité électrique, mécanique et thermique.
- La source de lumière LED contenue dans ce luminaire ne doit être remplacée que par Zaneen, ou une personne approuvée par Zaneen.
- Recommandations: Conservez la (les) fiche (s) d'instructions en cas de maintenance et / ou de démontage

Accéder aux fiches techniques détaillées et à la politique de garantie sur la page du produit sur zaneen.com